

Step 2: Run the buggy application (python movie_tickets.py)

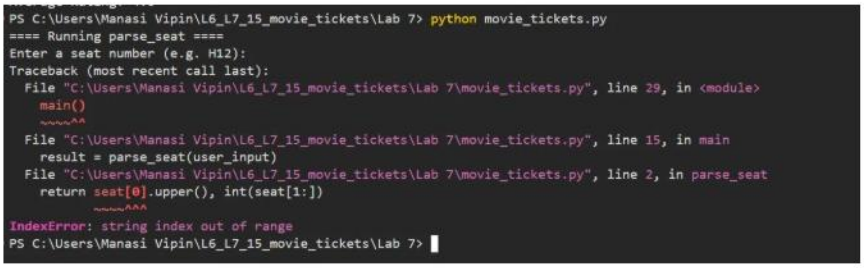

Step 4: Fuzz tests on the buggy code (3 failed)

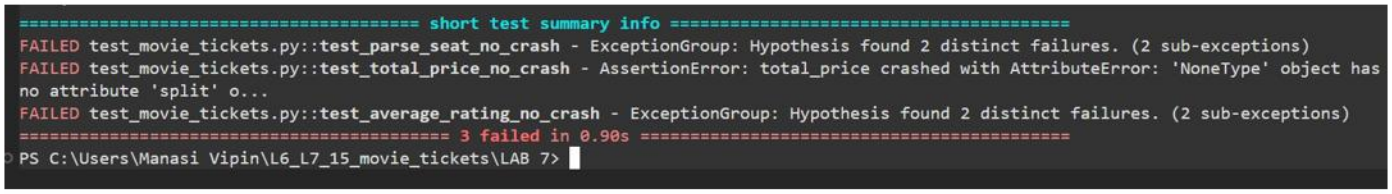

Step 5: Fixed application, normal input

```
PS C:\Users\Manasi Vipin\L6_L7_15_movie_tickets> cd "Lab 7"
PS C:\Users\Manasi Vipin\L6_L7_15_movie_tickets\Lab 7> python movie_tickets.py
==== Running parse_seat ====
Enter a seat number (e.g. H12): H12
Row and Seat: ('H', 12)

==== Running total_price ====
Enter ticket prices as CSV (e.g. 150,250,400): 150,250,400
Total with GST: 944.0

==== Running average_rating ====
Enter ratings separated by spaces (e.g. 4 5 3): 4 5 3
Average Rating: 4.0
PS C:\Users\Manasi Vipin\L6_L7_15_movie_tickets\Lab 7>
```

Step 5: Fixed application, bad input

```
PS C:\Users\Manasi Vipin\L6_L7_15_movie_tickets\LAB 7> python movie_tickets.py
==== Running parse_seat ====
Enter a seat number (e.g. H12):
Error: invalid seat: '' (expected a letter followed by a number, e.g. H12)

==== Running total_price ====
Enter ticket prices as CSV (e.g. 150,250,400): 1,,2
Error: invalid ticket price: ''

==== Running average_rating ====
Enter ratings separated by spaces (e.g. 4 5 3): 0 9
Error: rating must be between 1 and 5, got 0
```

Step 6: Fuzz tests on the fixed code (3 passed)

```
PS C:\Users\Manasi Vipin\L6_L7_15_movie_tickets\LAB 7> python -m pytest test_movie_tickets.py
========================================= test session starts =========================================
platform win32 -- Python 3.13.5, pytest-9.1.1, pluggy-1.6.0
rootdir: C:\Users\Manasi Vipin\L6_L7_15_movie_tickets\LAB 7
plugins: anyio-4.14.1, hypothesis-6.170.15
collected 3 items

test_movie_tickets.py ...                                                                    [100%]

========================================== 3 passed in 2.95s ==========================================
PS C:\Users\Manasi Vipin\L6_L7_15_movie_tickets\LAB 7>
```