

**NC State University**  
**Department of Electrical and Computer Engineering**  
**ECE 463/563 (Prof. Rotenberg)**  
**Project #1: Cache Design, Memory Hierarchy Design**  
**REPORT TEMPLATE (Version 2.0)**

**by**

**MANASI MILIND SANGAMNERKAR**

NCSU Honor Pledge: "I have neither given nor received unauthorized aid on this project."

Student's electronic signature: **MANASI MILIND SANGAMNERKAR**  
(sign by typing your name)

Course number: **563**


## 1. L1 cache exploration: SIZE and ASSOC

### GRAPH #1 (total number of simulations: 55)

For this experiment:

- Benchmark trace: gcc\_trace.txt
- L1 cache: SIZE is varied, ASSOC is varied, BLOCKSIZE = 32.
- L2 cache: None.
- Prefetching: None.

Plot L1 miss rate on the y-axis versus  $\log_2(\text{SIZE})$  on the x-axis, for eleven different cache sizes: SIZE = 1KB, 2KB, ..., 1MB, in powers-of-two. (That is,  $\log_2(\text{SIZE}) = 10, 11, \dots, 20$ .) The graph should contain five separate curves (*i.e.*, lines connecting points), one for each of the following associativities: direct-mapped, 2-way set-associative, 4-way set-associative, 8-way set-associative, and fully associative. All points for direct-mapped caches should be connected with a line, all points for 2-way set-associative caches should be connected with a line, *etc.*

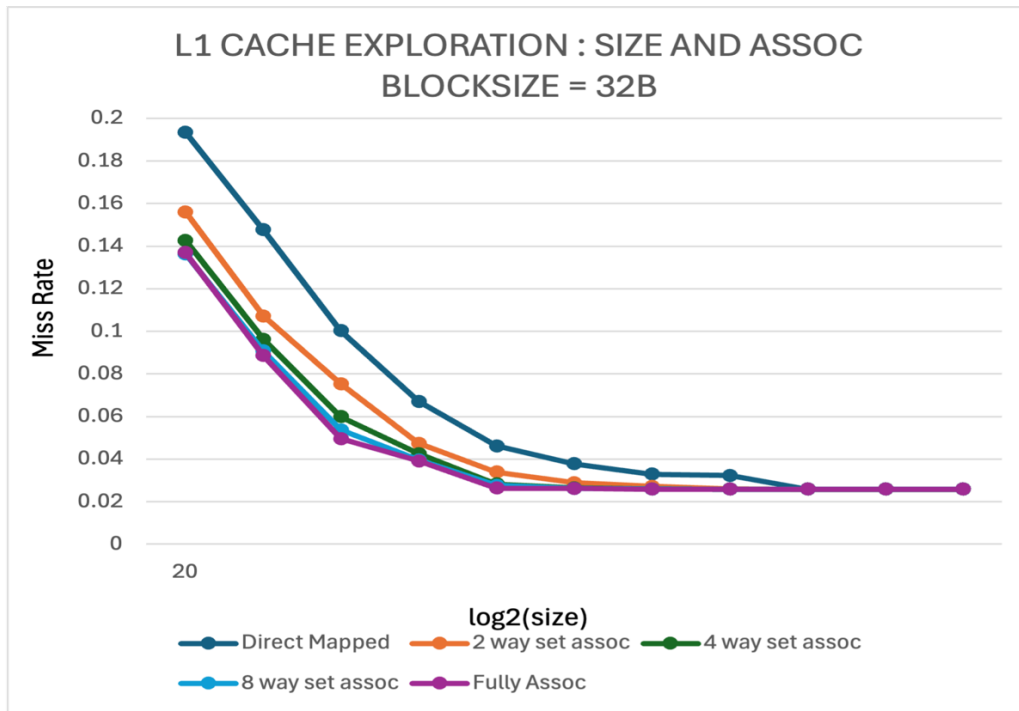

Answer the following questions:

1. For a given associativity, how does increasing cache size affect miss rate?

For a given associativity and fixed block size, increasing the cache size will decrease the miss rate and then asymptotically reaches to the value of only compulsory misses. This means that at a certain point while increasing the cache size all the conflict and capacity misses will be eliminated.

2. For a given cache size, how does increasing associativity affect miss rate?

For a given cache size and fixed block size, increase in associativity decreases the miss rate and then asymptotically decreases the compulsory and capacity misses. From the observation from graph, the 8-way set associative cache is equally good at the reduction of capacity misses as the fully associative cache.

3. Estimate the *compulsory miss rate* from the graph and briefly explain how you arrived at this estimate.


compulsory miss rate = 0.0258

How I arrived at this estimate: The limiting miss rate from the graph is 0.0258 must be the compulsory miss rate as the increase in cache size removes the conflict and capacity misses.

## **GRAPH #2** (no additional simulations with respect to GRAPH #1)

Same as GRAPH #1, except make the following changes:

- The y-axis should be AAT instead of L1 miss rate.
- Do NOT include fully-associative cache configurations (power-hungry, impractical cost for implementing LRU). Thus, GRAPH #2 should contain four (not five) separate curves: direct-mapped, 2-way set-associative, 4-way set-associative, 8-way set-associative.

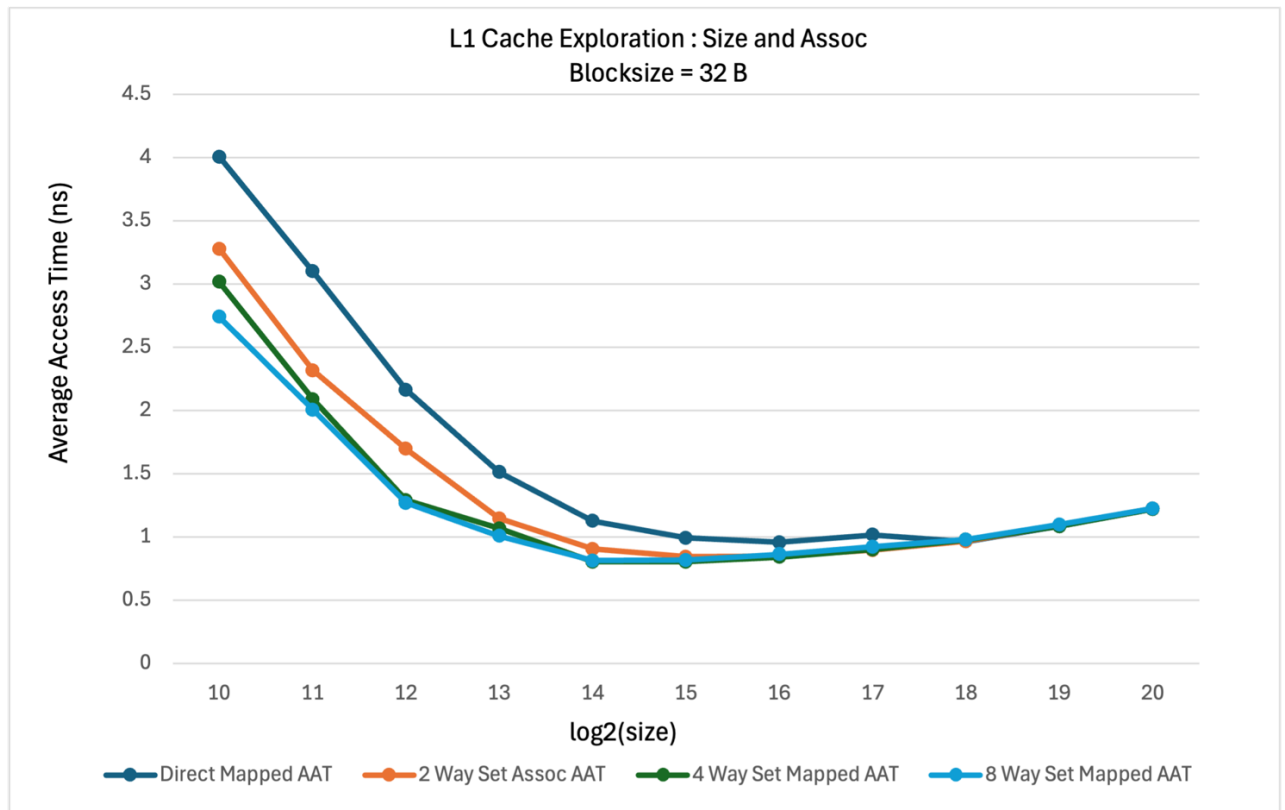

Answer the following question:

1. For a memory hierarchy with only an L1 cache and BLOCKSIZE = 32, which configuration yields the best (*i.e.*, lowest) AAT and what is that AAT?

Direct-mapped or set-associative cache configuration that yields the lowest AAT:


4 way set associative (32 KB)

AAT for this configuration: 0.8ns

### **GRAPH #3** (total number of simulations: 16)

Same as GRAPH #2, except make the following changes:

- Add the following L2 cache to the memory hierarchy: 16KB, 8-way set-associative, same block size as L1 cache.
- Vary the L1 cache size only between 1KB and 8KB (since L2 cache is 16KB).  
(And as with GRAPH #2, GRAPH #3 should contain four (not five) separate curves for L1 associativity: direct-mapped, 2-way set-associative, 4-way set-associative, 8-way set-associative.)

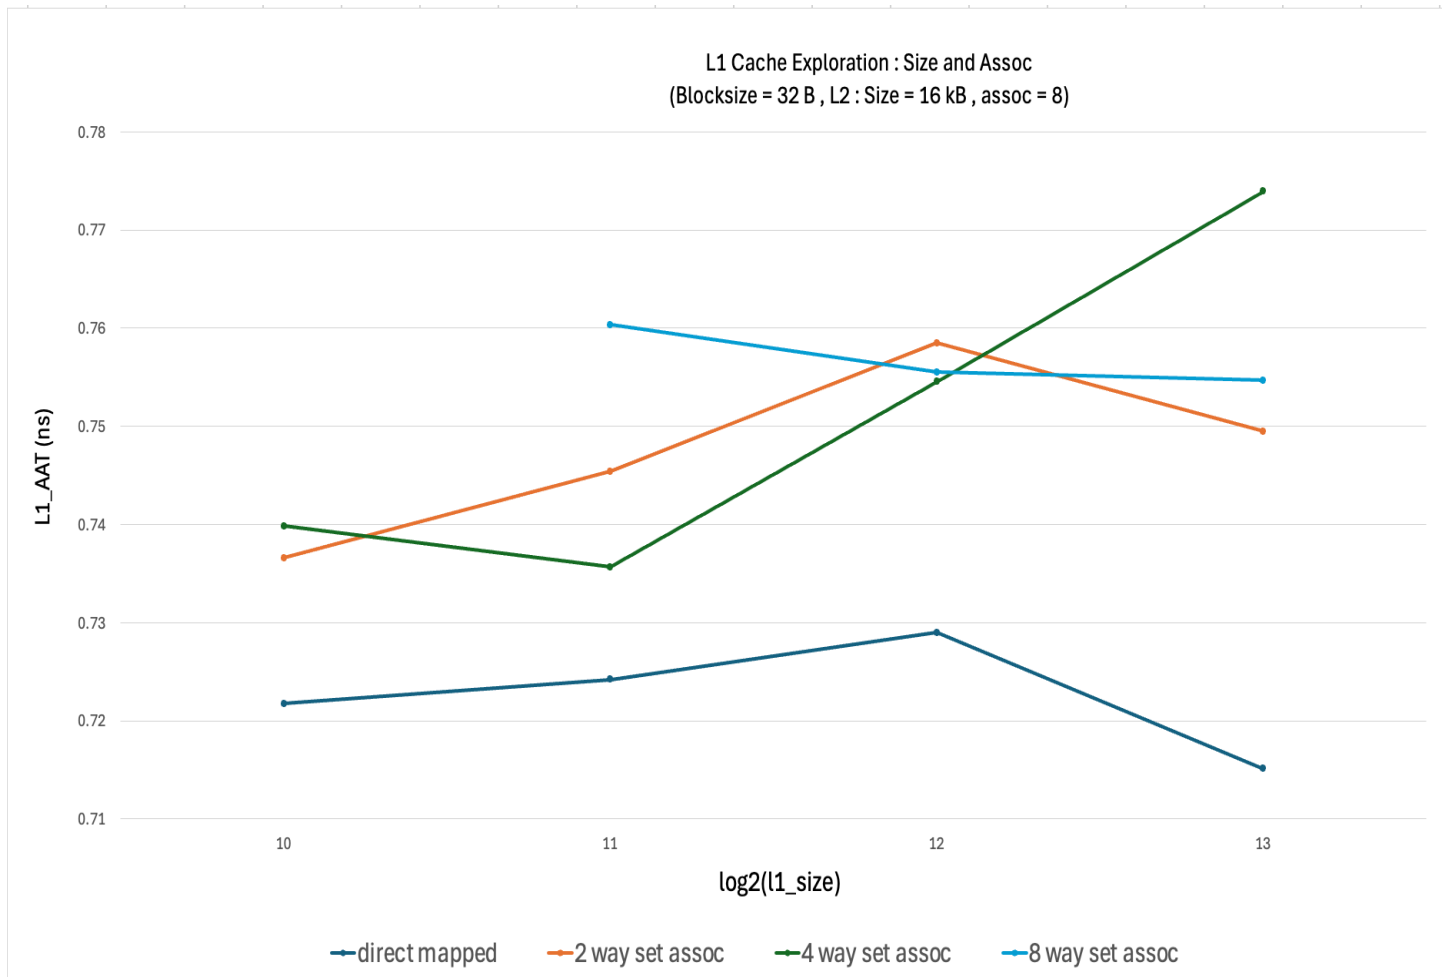

Answer the following questions:

1. With the L2 cache added to the system, which L1 cache configuration yields the best (*i.e.*, lowest) AAT and what is that AAT?

L1 configuration that yields the lowest AAT with 16KB 8-way L2 added:

8 KB, direct-mapped

AAT for this configuration: 0.72ns

2. How does the lowest AAT with L2 cache (GRAPH #3) compare with the lowest AAT without L2 cache (GRAPH #2)?

The lowest AAT with L2 cache is less than(0.08ns) the lowest AAT without L2 cache.


## 2. L1 cache exploration: SIZE and BLOCKSIZE

### **GRAPH #4** (total number of simulations: 24)

For this experiment:

- Benchmark trace: gcc\_trace.txt
- L1 cache: SIZE is varied, BLOCKSIZE is varied, ASSOC = 4.
- L2 cache: None.
- Prefetching: None

Plot L1 miss rate on the y-axis versus  $\log_2(\text{BLOCKSIZE})$  on the x-axis, for four different block sizes: BLOCKSIZE = 16, 32, 64, and 128. (That is,  $\log_2(\text{BLOCKSIZE}) = 4, 5, 6$ , and 7.) The graph should contain six separate curves (*i.e.*, lines connecting points), one for each of the following L1 cache sizes: SIZE = 1KB, 2KB, ..., 32KB, in powers-of-two. All points for SIZE = 1KB should be connected with a line, all points for SIZE = 2KB should be connected with a line, *etc.*

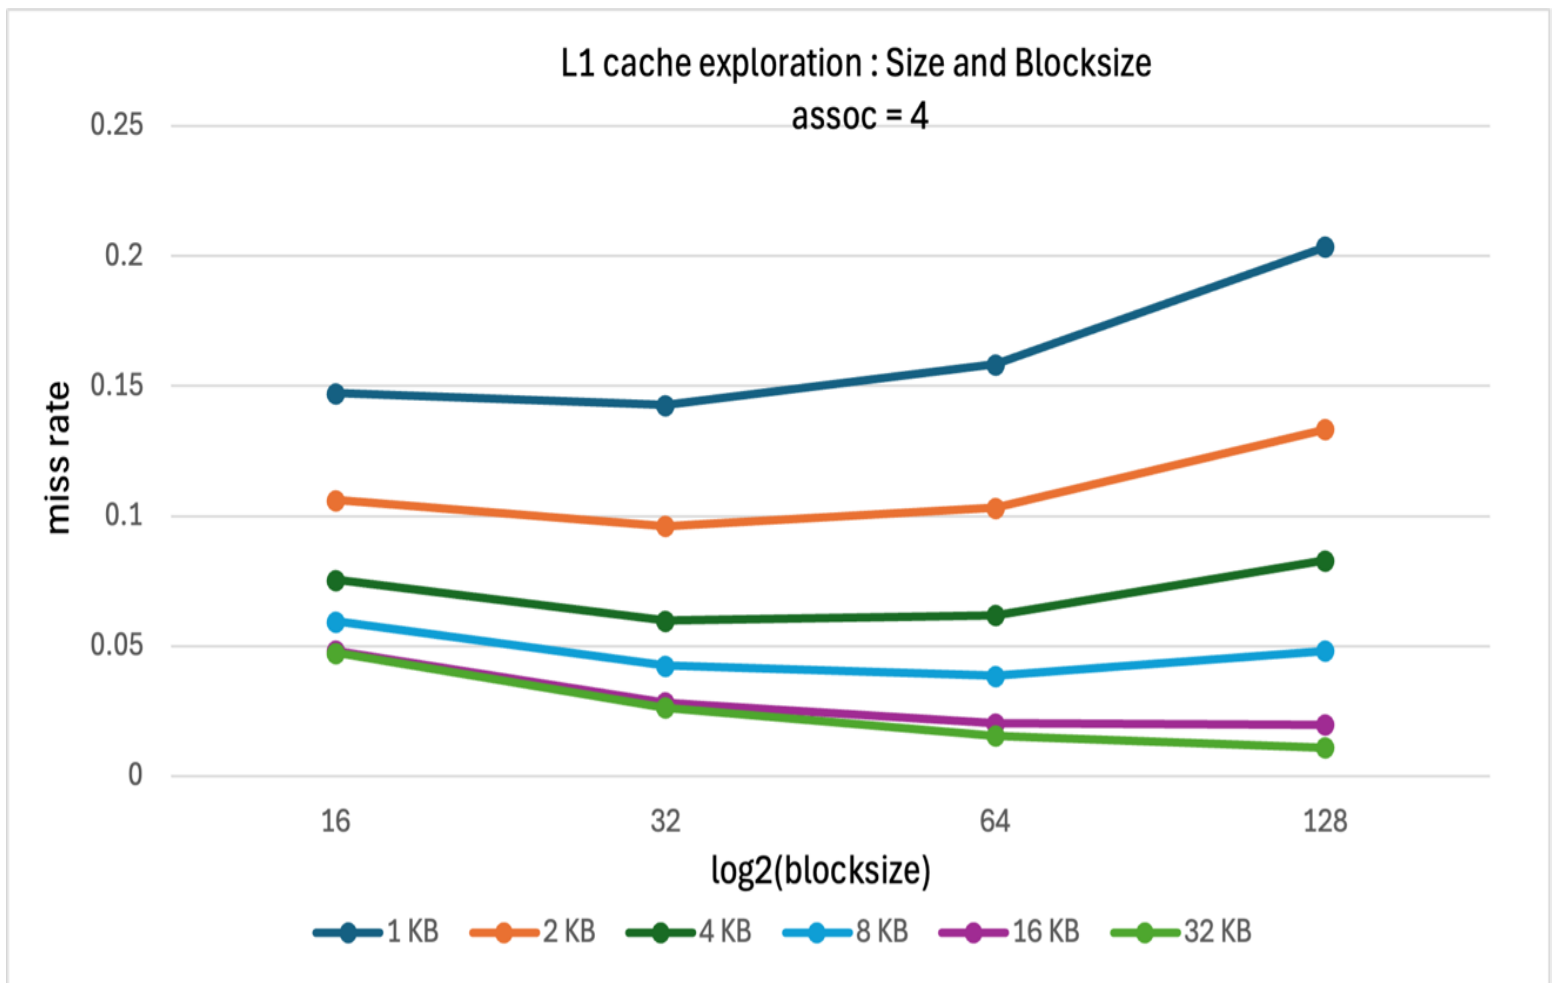



Answer the following questions:

1. Do smaller caches prefer smaller or larger block sizes?

Smaller caches prefer **smaller** block sizes. For example, the smallest cache considered in Graph #4 (1KB) achieves its lowest miss rate with a block size of **16** B.

2. Do larger caches prefer smaller or larger block sizes?

Larger caches prefer **larger** block sizes. For example, the largest cache considered in Graph #4 (32KB) achieves its lowest miss rate with a block size of **128** B.

3. As block size is increased from 16 to 128, is the tension between *exploiting more spatial locality* and *cache pollution* evident in the graph? Explain.

Yes, the tension between *exploiting more spatial locality* and *cache pollution* is evident in the graph.

For example, consider the smallest (1KB) cache in Graph #4. Increasing block size from **16** B to **32** B is helpful (reduces miss rate) due to **exploiting more spatial locality**. But then increasing block size further, from **32** B to **128** B, is not helpful (increases miss rate) due to **cache pollution** having greater effect.


### 3. L1 + L2 co-exploration

#### **GRAPH #5** (total number of simulations: 12)

For this experiment:

- Benchmark trace: gcc\_trace.txt
- L1 cache: SIZE is varied, BLOCKSIZE = 32, ASSOC = 4.
- L2 cache: SIZE is varied, BLOCKSIZE = 32, ASSOC = 8.
- Prefetching: None.

Plot AAT on the y-axis versus  $\log_2(\text{L1 SIZE})$  on the x-axis, for four different L1 cache sizes: L1 SIZE = 1KB, 2KB, 4KB, 8KB. (That is,  $\log_2(\text{L1 SIZE}) = 10, 11, 12, 13$ .) The graph should contain three separate curves (*i.e.*, lines connecting points), one for each of the following L2 cache sizes: 16KB, 32KB, 64KB. All points for the 16KB L2 cache should be connected with a line, all points for the 32KB L2 cache should be connected with a line, *etc.*

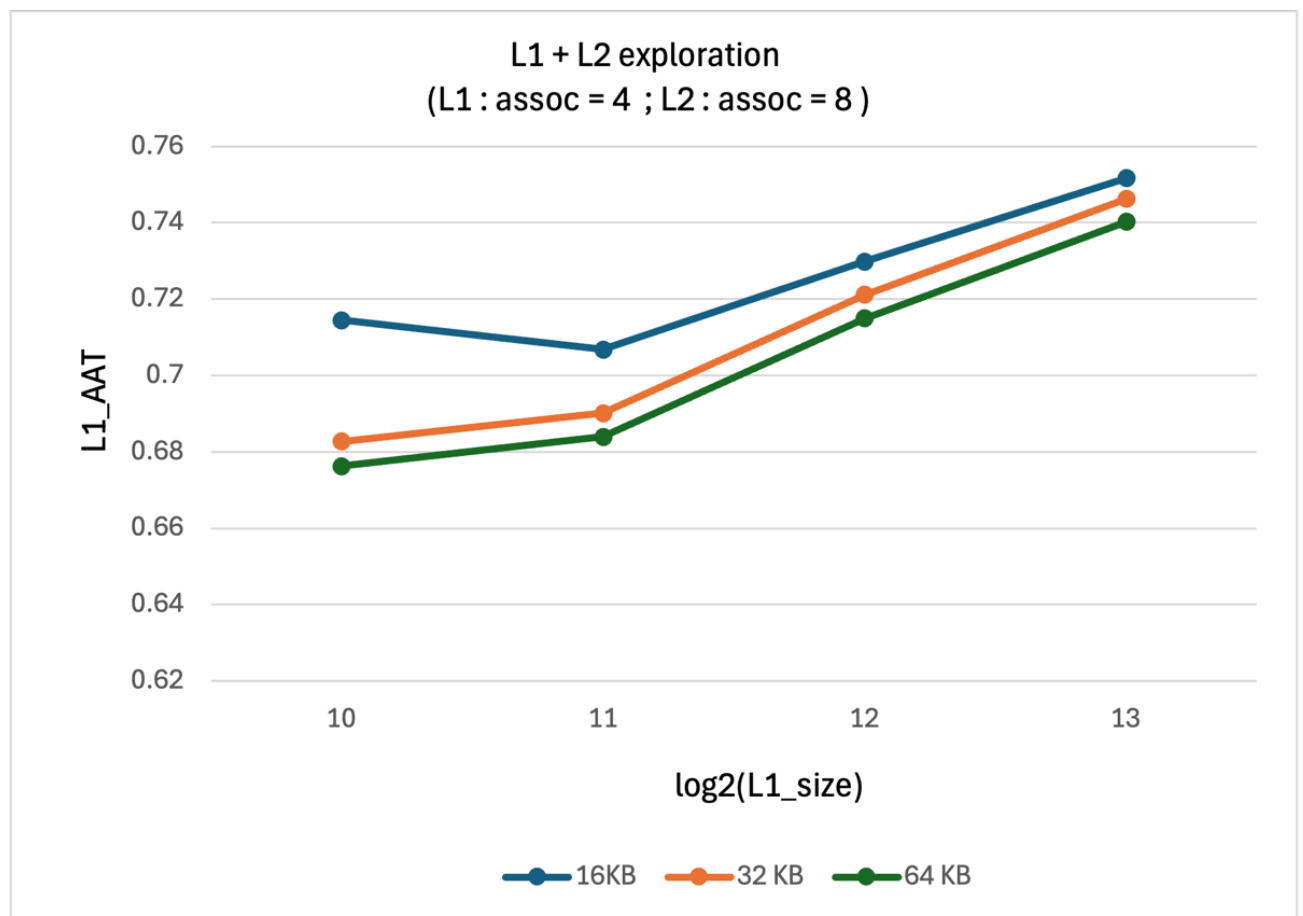

Answer the following question:

1. Which memory hierarchy configuration in Graph #5 yields the best (*i.e.*, lowest) AAT and what is that AAT?

Configuration that yields the lowest AAT:	L1: 1KB , L2: 64 KB
Lowest AAT:	0.68ns

## 4. Stream buffers study (ECE 563 students only)

**TABLE #1** (total number of simulations: 5)

For this experiment:

- Microbenchmark: stream\_trace.txt
- L1 cache: SIZE = 1KB, ASSOC = 1, BLOCKSIZE = 16.
- L2 cache: None.
- PREF\_N (number of stream buffers): 0 (pref. disabled), 1, 2, 3, 4
- PREF\_M (number of blocks in each stream buffer): 4

The trace “stream\_trace.txt” was generated from the loads and stores in the loop of interest of the following microbenchmark:

```
#define SIZE 1000

uint32_t a[SIZE];
uint32_t b[SIZE];
uint32_t c[SIZE];

int main(int argc, char *argv[]) {
...
    // LOOP OF INTEREST
    for (int i = 0; i < SIZE; i++)
        c[i] = a[i] + b[i];    // per iteration: 2 loads (a[i], b[i]) and 1 store (c[i] = ...)
...
}
```

Fill in the following table and answer the following questions:

PREF_N, PREF_M	L1 miss rate
0,0 (pref. disabled)	0.2500
1,4	0.2500
2,4	0.2500
3,4	0.0010
4,4	0.0010

1. For this streaming microbenchmark, with prefetching disabled, do L1 cache size and/or associativity affect the L1 miss rate (feel free to simulate L1 configurations besides the one used for the table)? Why or why not?

With prefetching disabled, L1 cache size and/or associativity **do not** affect L1 miss rate (for this streaming microbenchmark).

The reason: Each block will contain four elements and the increase in cache size or associativity will eliminate the capacity and conflict misses. Here 0.25 represents the compulsory misses for each set of four elements per array.

2. For this streaming microbenchmark, what is the L1 miss rate with prefetching disabled? Why is it that value, *i.e.*, what is causing it to be that value? Hint: each element of arrays a, b, and c, is 4 bytes (uint32\_t).

The L1 miss rate with prefetching disabled is 0.25, because each block in cache will have 4 consecutive elements in each of the array (a,b,c) so one in every four elements will be a miss hence 25 percent i.e. 0.25.

3. For this streaming microbenchmark, with prefetching disabled, what would the L1 miss rate be if you doubled the block size from 16B to 32B? (hypothesize what it will be and then check your hypothesis with a simulation)

The L1 miss rate with prefetching disabled and a block size of 32B is 0.125, because there will be one compulsory miss for every eight elements.

4. With prefetching enabled, what is the minimum number of stream buffers required to have any effect on L1 miss rate? What is the effect on L1 miss rate when this many stream buffers are used: specifically, is it a modest effect or huge effect? Why are this many stream buffers required? Why is using fewer stream buffers futile? Why is using more stream buffers wasteful?

Minimum number of stream buffers needed to have any effect on L1 miss rate: 3

With this many stream buffers, the effect on L1 miss rate is huge. Specifically, the L1 miss rate is nearly 0. We only miss on the first elements of a, b, c (hence a total of 3 misses).

This many stream buffers are required because there are 3 arrays, and each array will require its own stream buffer to store the prefetched values without overwriting the prefetched values of any other array.

Using fewer stream buffers is futile because the prefetched values for an array will be overwritten to store the prefetched values of any other array.

Using more stream buffers is wasteful because once the 3 arrays have their own buffers to prefetch the values, there is no requirement of any other extra buffer.