


Practical-5

- A producer-consumer program was created using an anonymous pipe.
- The parent process acted as the producer and generated the values 10, 20, 30, 40 and 50.
- The child process acted as the consumer and successfully received the same values through the pipe.
- The program measured the communication time using `clock()`.
- The output showed that the data produced by the parent was successfully consumed by the child process.
- The communication time displayed in the executed output was 0.000051 seconds.

Screenshot of the Output

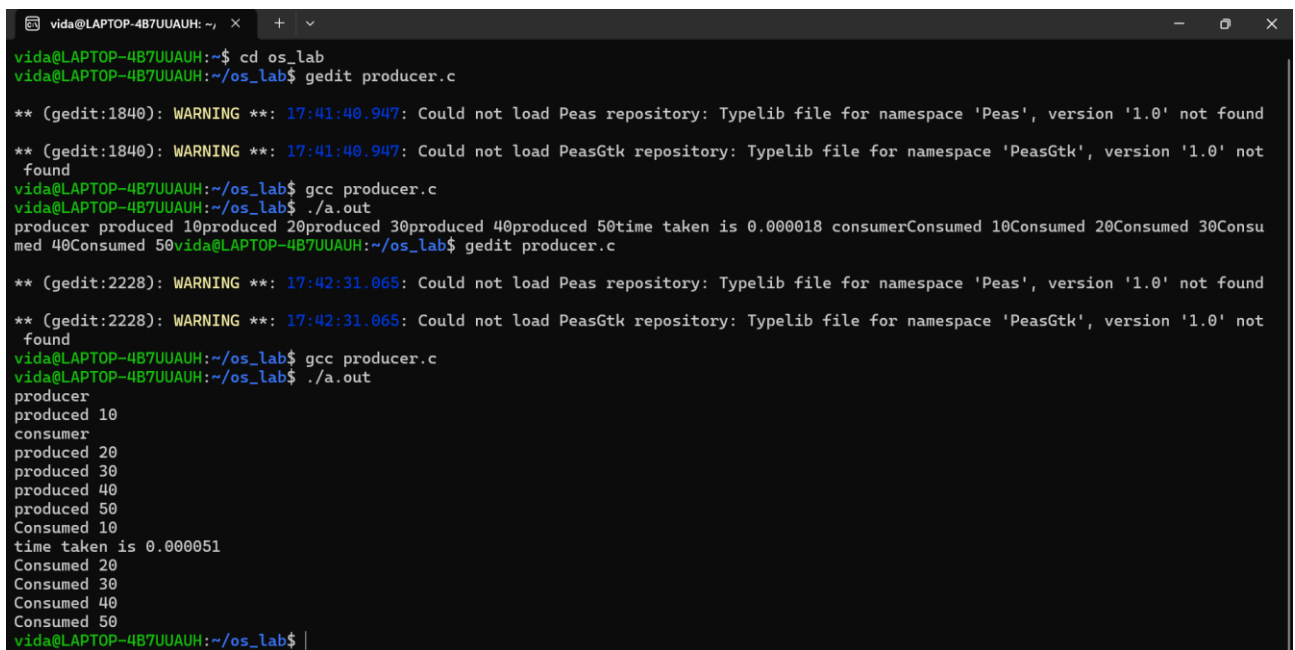

```
vida@LAPTOP-4B7UUUAUH: ~/os_lab
vida@LAPTOP-4B7UUUAUH:~/os_lab$ gedit producer.c

** (gedit:1840): WARNING **: 17:41:40.947: Could not load Peas repository: Typelib file for namespace 'Peas', version '1.0' not found
** (gedit:1840): WARNING **: 17:41:40.947: Could not load PeasGtk repository: Typelib file for namespace 'PeasGtk', version '1.0' not found
vida@LAPTOP-4B7UUUAUH:~/os_lab$ gcc producer.c
vida@LAPTOP-4B7UUUAUH:~/os_lab$ ./a.out
producer produced 10produced 20produced 30produced 40produced 50time taken is 0.000018 consumerConsumed 10Consumed 20Consumed 30Consumed 40Consumed 50
vida@LAPTOP-4B7UUUAUH:~/os_lab$ gedit producer.c

** (gedit:2228): WARNING **: 17:42:31.065: Could not load Peas repository: Typelib file for namespace 'Peas', version '1.0' not found
** (gedit:2228): WARNING **: 17:42:31.065: Could not load PeasGtk repository: Typelib file for namespace 'PeasGtk', version '1.0' not found
vida@LAPTOP-4B7UUUAUH:~/os_lab$ gcc producer.c
vida@LAPTOP-4B7UUUAUH:~/os_lab$ ./a.out
producer
produced 10
consumer
produced 20
produced 30
produced 40
produced 50
Consumed 10
time taken is 0.000051
Consumed 20
Consumed 30
Consumed 40
Consumed 50
vida@LAPTOP-4B7UUUAUH:~/os_lab$ |
```