

OSSP – SKILL 2

Building a simple shell — the main loop: display a prompt, read a command, and exit on "exit".

Wrote the shell's main loop in `src/shell.c` using nano — it displays a `myshell>` prompt, reads a command with `scanf`, and stops when the user types `exit`.


Compiled the program with `gcc src/shell.c` and started it with `./a.out` — the `myshell>` prompt appears, ready for input.

```
manu@Manasvi:~/os_lab/ossdp_shell$ nano src/shell.c
manu@Manasvi:~/os_lab/ossdp_shell$ nano src/shell.c
manu@Manasvi:~/os_lab/ossdp_shell$ gcc src/shell.c
manu@Manasvi:~/os_lab/ossdp_shell$ ./a.out
myshell> |
```

Tested the shell: typed `hello` and `date` (each is echoed back), then `exit`, which prints "Exiting shell..." and ends the loop.

```
manu@Manasvi:~/os_lab/ossdp_shell$ ./a.out
myshell> hello
You typed: hello
myshell> date
You typed: date
myshell> exit
Exiting shell...
manu@Manasvi:~/os_lab/ossdp_shell$ |
```

Control Flow Diagram

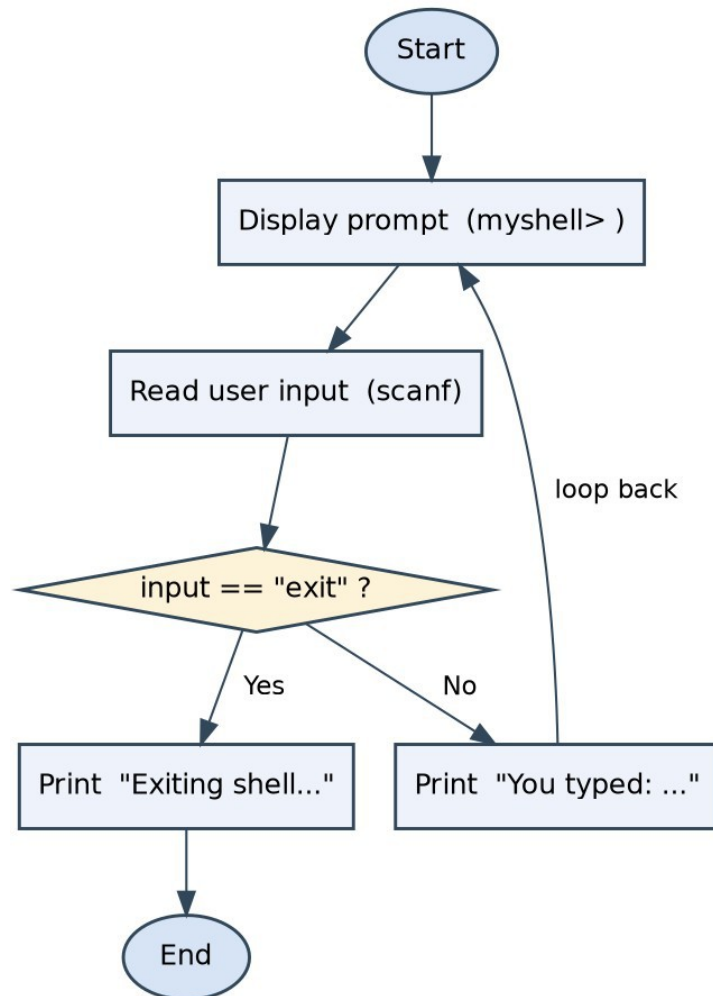

The shell repeats one loop: show the prompt, read the input, then either exit (if the command is exit) or echo the command and loop back.