1. Lists, Links and Images:

1a) Write a HTML program, to explain the working of lists.

Program:

```
<!DOCTYPE html>
<html> <head>
<title>Working with lists in HTML</title>
</head>
<body>
<h1>SVECW</h1>
<h2>CSE-CS</h2>
<h3>II YEAR II SEM</h3>
<h3 style="font-size:21px;">CSE - CS</h3>
<h4 style="color:DodgerBlue; font-size:20px;">THEORY</h4>
<ol type="i" style="color:DodgerBlue; font-size:20px;">
<li>MEFA</li>
<li>P&amp;amp;S</li>
<li>OS</li>
<li>DBMS</li>
<li>CN</li>
</ol>
<h4 style="color:MediumSeaGreen; font-size:20px;">LAB</h4>
<ul style="list-style-type:circle; color:MediumSeaGreen;
font-size:20px;">
<li>OS</li>
<li>DBMS</li>
<li>FSD</li>
<li>SB</li>
<li>DTI</li>
</ul>
<h4 style="color:Tomato; font-size:20px;">DEFINITIONS</h4>
<dl style="color:Tomato; font-size:20px;">
<dt>MEFA</dt>
<dd>Managerial Economics And Financial Analysis</dd>
<dt>NTA</dt>
<dd>Number Theory and it's Applications</dd>
<dt>OS</dt>
<dd>Operating Systems</dd>
```

```
<dt>DBMS</dt>
<dd>Database Management Systems</dd>
<dt>CN</dt>
<dd>Computer Networks</dd>
<dt>FSD</dt>
<dd>Full Stack Development</dd>
<dt>DTI</dt>
<dd>Design Thinking &amp;amp; Innovation</dd>
<dt>SB</dt>
<dd>Spring Boot</dd>
</dl>
</body>
</html>
```

Output:

SVECW

CSE-CS

II YEAR II SEM

CSE - CS

THEORY

i. MEFA
ii. P&S
iii. OS
iv. DBMS
v. CN

LAB

- OS
- DBMS
- FSD
- SB
- DTI

DEFINITIONS

MEFA
: Managerial Economics And Financial Analysis

NTA
: Number Theory and it's Applications

OS
: Operating Systems

DBMS
: Database Management Systems

CN
: Computer Networks

FSD
: Full Stack Development

DTI
: Design Thinking & Innovation

SB
: Spring Boot

1b) Write a HTML program, to explain the working of hyperlinks using tag and href, target attributes.

Program:

```
<!DOCTYPE html>
<html> <head>
<title>Understanding HyperLinks in HTML</title>
</head>
<body>
<h2>Understanding HyperLinks in HTML</h2>
<h3>Basic Hyperlink</h3>
<h4>Click the link below to visit Google</h4>
<a href="https://www.google.com">Visit Google</a>
<h2>Hyperlink with Target Attribute</h2>
<h3>This link opens in a new tab</h3>
<a href="https://www.wikipedia.com" target="_blank">Visit
Wikipedia</a>
<h2>Anchor Link (within the same page)</h2>
<h3>Go directly to the bottom of the page</h3>
<a href="#bottom">Go to Bottom</a>
<h2>Anchor Link (within the same page)</h2>
<h3>Go directly to the top of the page</h3>
<a href="#top">Go to Top</a>
<h2>Email Link</h2>
<h3>Click the link below to send an email</h3>
<a href="mailto:24b01a4644@svecw.edu.in">Send an Email</a>
<div id="bottom" style="margin-top:200px;">
<h3>You are at the Bottom</h3>
</div>
<div id="top">
<h3>You are at the Top</h3>
</div>
</body>
</html>
```

Output:

Understanding HyperLinks in HTML

Basic Hyperlink

Click the link below to visit Google

Visit Google

Hyperlink with Target Attribute

This link opens in a new tab

Visit Wikipedia

Anchor Link (within the same page)

Go directly to the bottom of the page

Go to Bottom

Anchor Link (within the same page)

Go directly to the top of the page

Go to Top

Email Link

Click the link below to send an email

Send an Email

You are at the Bottom

You are at the Top

1c) Create a HTML document that has your image and your friend's image with a specific height and width. Also when clicked on the images it should navigate to their respective profiles.

Program:

```
<!DOCTYPE html>
<html> <head>
<title>Profile Images</title>
<style>
.profile-img {
width: 150px;
height: 150px;
border-radius: 50%;
cursor: pointer;
}
</style>
</head>
<body>
<h1>Profiles</h1>
<a href="https://google.com" target="_blank">
<img src="p1.jpeg" alt="Your Image" class="profile-img">
</a>
<a href="https://github.com/manaswini1877" target="_blank">
<img src="p2.jpg" alt="Friend's Image" class="profile-img">
</a>
</body>
</html>
```

Output:

Profiles



1d) Write a HTML program, in such a way that, rather than placing large images on a page, the preferred technique is to use thumbnails by setting the height and width parameters to something like to 100*100 pixels. Each thumbnail image is also a link to a full-sized version of the image. Create an image gallery using this technique.

Program:

```
<!DOCTYPE html>
<html lang="en">
<head>
<title>Image Gallery</title>
<style>
.gallery {
display: flex;
flex-wrap: wrap;
gap: 15px;
}
.gallery img {
width: 100px;
height: 100px;
object-fit: cover;
border: 2px solid #ccc;
cursor: pointer;
transition: transform 0.2s ease;
}
.gallery img:hover {
transform: scale(1.1);
}
</style>
</head>
<body>
<h1>Princess Gallery</h1>
<div class="gallery">
<a href="d1.jpeg" target="_blank">
<img src="e1.jpeg" alt="Image 1">
</a>
<a href="d2.jpeg" target="_blank">
```

```
<img src="e2.jpeg" alt="Image 2">
</a>
<a href="d3.jpeg" target="_blank">
<img src="e3.jpeg" alt="Image 3">
</a>
<a href="d4.jpeg" target="_blank">
<img src="e4.jpeg" alt="Image 4">
</a>
<a href="d5.jpeg" target="_blank">
<img src="e5.jpeg" alt="Image 5">
</a>
</div>
</body>
</html>
```

Output:

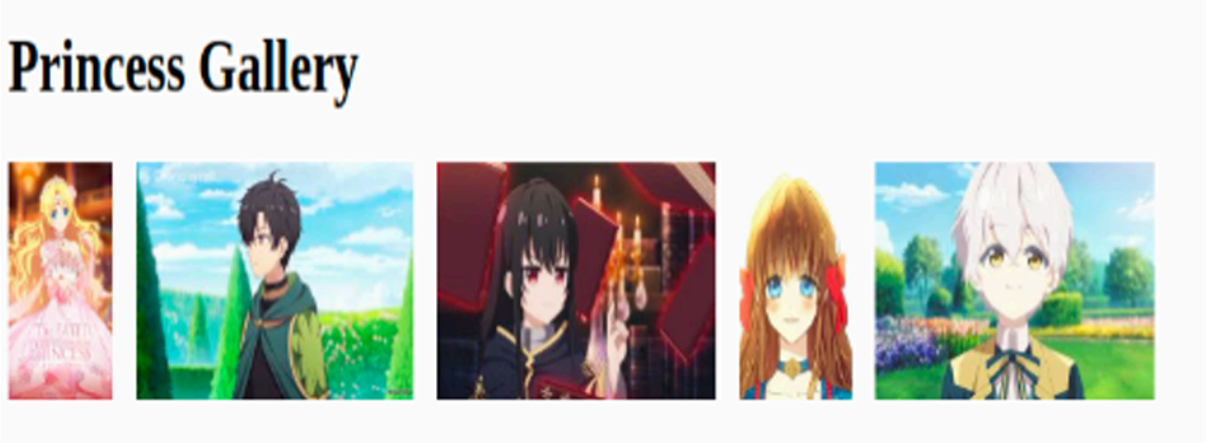

2. HTML Tables, Forms and Frames

2a) Write a HTML program, to explain the working of tables. (use tags: <table>, <tr>, <th>, <td> and attributes: border, rowspan, colspan).

Program:

```
<!DOCTYPE html>
<html> <head>
<title>HTML Table Example</title>
<style>
table {
width: 80%;
border-collapse: collapse;
margin: 20px 0;
}
table, th, td {
border: 1px solid black;
}
th, td {
padding: 10px;
text-align: center;
}
th {
background-color: #f4f4f4;
}
</style>
</head>
<body>
<h1>HTML Table Example</h1>
<table border="1">
<tr>
<th colspan="3">Employee Information</th>
</tr>
<tr>
<th>Name</th>
<th>Position</th>
<th>Department</th>
</tr>
```

```
<tr>
<td>Vanapalli Lakshmi Sai Sri</td>
<td>Software Engineer</td>
<td>Development</td>
</tr>
<tr>
<td rowspan="2">Tummallapalli Tejaswini</td>
<td>Project Manager</td>
<td>Operations</td>
</tr>
<tr>
<td>Team Lead</td>
<td>Development</td>
</tr>
<tr>
<td>Rani Manaswini</td>
<td>HR Specialist</td>
<td>Human Resources</td>
</tr>
</table>
</body>
</html>
```

Output:

HTML Table Example

Employee Information		
Name	**Position**	**Department**
Vanapalli Lakshmi Sai Sri	Software Engineer	Development
Tummallapalli Tejaswini	Project Manager	Operations
	Team Lead	Development
Rani Manaswini	HR Specialist	Human Resources

2b) Write a HTML program, to explain the working of tables by preparing a timetable. (Note: Use tag to set the caption to the table & also use cell spacing, cell padding, border, rowspan, colspan etc.).

Program:

```
<!DOCTYPE html>
<html> <head>
<title>Class Timetable</title>
<style>
table {
width: 80%;
border-collapse: collapse;
margin: 20px 0;
text-align: center;
}
table, th, td {
border: 2px solid black;
}
th, td {
padding: 15px;
}
th {
background-color: #f4f4f4;
}
caption {
font-size: 1.5em;
margin-bottom: 10px;
}
</style>
</head>
<body>
<h2>II Year I Sem – CSE-Cs Timetable</h2>
<table>
<caption>Class Timetable</caption>
<tr>
<th>Day</th>
<th>08:00–08:50</th>
```

<th>08:50–09:40</th>
<th>09:50–10:40</th>
<th>10:40–11:30</th>
<th>01:00–01:50</th>
<th>01:50–02:40</th>
<th>02:40–03:30</th>
<th>03:30–04:20</th>
</tr>
<tr>
<td>Monday</td>
<td>CN</td>
<td>MEFA</td>
<td>OS</td>
<td>FSD-1</td>
<td>NTA</td>
<td>DBMS</td>
<td>OS</td>
<td>HONORS</td>
</tr>
<tr>
<td>Tuesday</td>
<td>OS</td>
<td>CN</td>
<td>DBMS</td>
<td>NTA</td>
<td colspan="3">Spring Boot Lab</td>
<td>HONORS</td>
</tr>
<tr>
<td>Wednesday</td>
<td>NTA</td>
<td colspan="2">DT Lab</td>
<td>MEFA</td>
<td>NTA</td>
<td>CN</td>
<td>FSD-1</td>
<td>HONORS</td>
</tr>
<tr>

```
<td>Thursday</td>
<td>MEFA</td>
<td>DBMS</td>
<td>CN</td>
<td>OS</td>
<td colspan="3">Full Stack Development-1 LAB</td>
<td>HONORS</td>
</tr>
<tr>
<td>Friday</td>
<td>DT</td>
<td colspan="3">Database Management System Lab</td>
<td>OS</td>
<td>DBMS</td>
<td>MEFA</td>
<td>HONORS</td>
</tr>
<tr>
<td>Saturday</td>
<td>DBMS</td>
<td colspan="3">Computer Networks Lab</td>
<td>CN</td>
<td>NTA</td>
<td>COUN</td>
<td>LIB</td>
</tr>
</table>
</body>
</html>
```

Output:

II Year I Sem – CSE-Cs Timetable

Class Timetable

Day	08:00–08:50	08:50–09:40	09:50–10:40	10:40–11:30	01:00–01:50	01:50–02:40	02:40–03:30	03:30–04:20
Monday	CN	MEFA	OS	FSD-1	NTA	DBMS	OS	HONORS
Tuesday	OS	CN	DBMS	NTA	Spring Boot Lab			HONORS
Wednesday	NTA	DT Lab		MEFA	NTA	CN	FSD-1	HONORS
Thursday	MEFA	DBMS	CN	OS	Full Stack Development-1 LAB			HONORS
Friday	DT	Database Management System Lab			OS	DBMS	MEFA	HONORS
Saturday	DBMS	Computer Networks Lab			CN	NTA	COUN	LIB

2c) Write a HTML program, to explain the working of forms by designing Registration form. (Note: Include text field, password field, number field, date of birth field, checkboxes, radio buttons, list boxes using & tags, and two buttons ie: submit and reset. Use tables to provide a better view).

Program:

```
<!DOCTYPE html>
<html> <head>
<title>Registration Form</title>
<style>
table {
width: 50%;
border-collapse: collapse;
margin: 20px auto;
}
th, td {
padding: 10px;
}
th {
text-align: right;
}
input, select, textarea {
width: 100%;
padding: 5px;
}
.button-group {
text-align: center;
}

</style>
</head>
<body>
<h1style="text-align:center;">Registration Form</h1>
<form action="/submit_registration" method="post">
<table border="1">
<tr>
<th>Full Name:</th>
```

```
<td><input type="text" name="fullname" required></td>
</tr>
<tr>
<th>Password:</th>
<td><input type="password" name="password" required></td>
</tr>
<tr>
<th>Email:</th>
<td><input type="email" name="email" required></td>
</tr>
<tr>
<th>Phone Number:</th>
<td><input type="tel" name="phone" pattern="[0-9]{10}"
required></td>
</tr>
<tr>
<th>Date of Birth:</th>
<td><input type="date" name="dob" required></td>
</tr>
<tr>
<th>Gender:</th>
<td>
<input type="radio" name="gender" value="male" required> Male
<input type="radio" name="gender" value="female"> Female
<input type="radio" name="gender" value="other"> Other
</td>
</tr>
<tr>
<th>Hobbies:</th>
<td>
<input type="checkbox" name="hobbies[]" value="reading"> Reading
<input type="checkbox" name="hobbies[]" value="sports"> Sports
<input type="checkbox" name="hobbies[]" value="music"> Music
</td>
</tr>
<tr>
<th>Country:</th>
<td>
<select name="country" required>
```

```
<option value="">--Select Country--</option>
<option value="USA">USA</option>
<option value="Canada">Canada</option>
<option value="UK">UK</option>
<option value="India">India</option>
<option value="Australia">Australia</option>
</select>
</td>
</tr>
<tr>
<th>Address:</th>
<td>
<textarea name="address" rows="4" required></textarea>
</td>
</tr>
<tr>
<tdcolspan="2" class="button-group">
<input type="submit" value="Submit">
<input type="reset" value="Reset">
</td>
</tr>
</table>
</form>
</body>
</html>
```

Output:

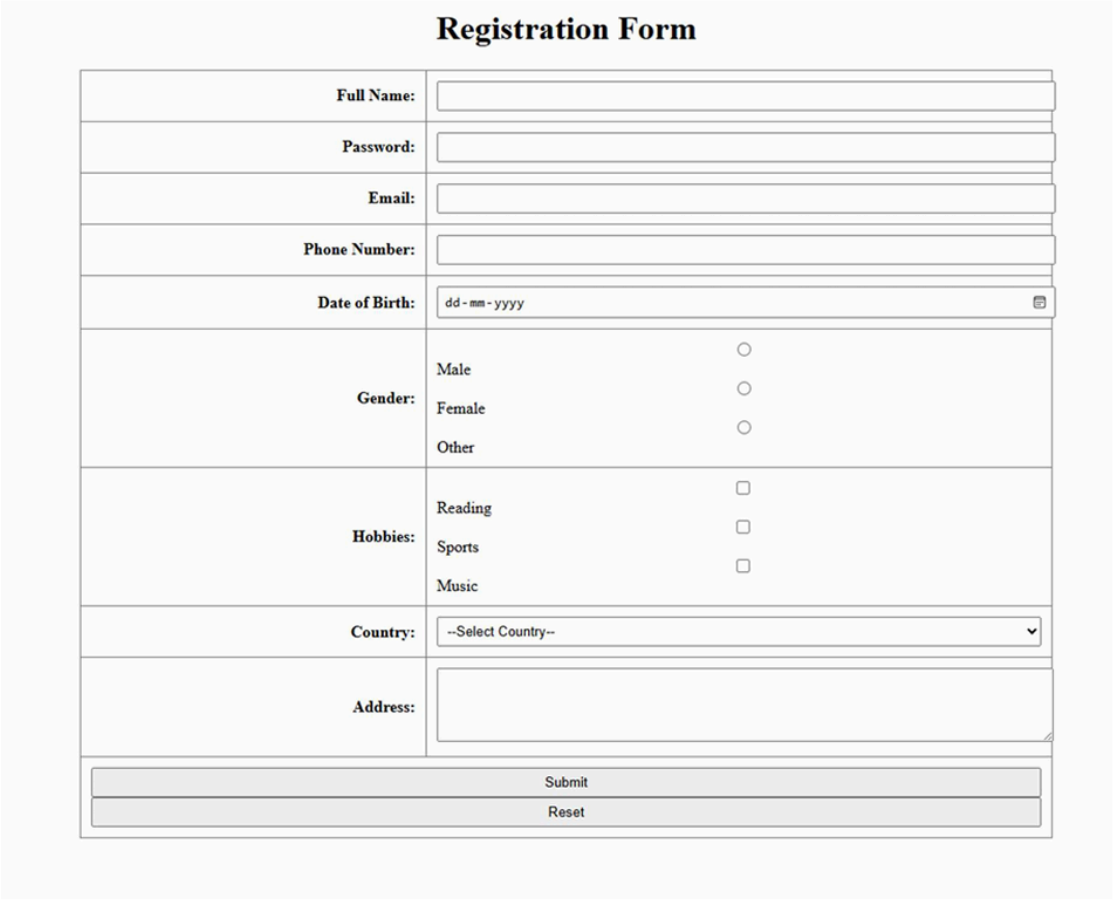
Registration Form
Full Name:
Password:
Email:
Phone Number:
Date of Birth:
dd-mm-yyyy
Gender:
Male
Female
Other
Hobbies:
Reading
Sports
Music
Country:
--Select Country--
Address:
Submit
Reset

2d) Write a HTML program, to explain the working of frames, such that page is to be divided into 3 parts on either direction.

Program:

```
<!DOCTYPE html>
<html> <head>
<title>HTML Frames Example</title>
<style>
body, html {
margin: 0;
padding: 0;
height: 100%;
}
.horizontal-container {
display: grid;
grid-template-columns: 1fr 1fr 1fr;
height: 100vh;
}
.frame {
border: 2px solid #ccc;
}
@media screen and (max-width: 768px) {
.horizontal-container {
grid-template-columns: 1fr;
grid-template-rows: 1fr 1fr 1fr;
}
}
</style>

</head>
<body>
<div class="horizontal-container">
<iframe class="frame" src="image.html" title="Image Frame"></iframe>
<iframe class="frame" src="paragraph.html" title="Paragraph
Frame"></iframe>
<iframe class="frame" src="link.html" title="Link Frame"></iframe>
</div>
<script>
```

```
<p style="color:red; font-weight:bold;">
Your browser does not support iframes or scripts are disabled.
</p>
</noscript>
</body>
</html>
```

1)Image.html (First Frame – Image):

```
<!DOCTYPE html>
<html>
<head>
<title>Image Frame</title>
</head>
<body>
<img src="flower.jpg" alt="Sample Image" style="max-width:100%;
height:auto;">
</body>
</html>
```

2)paragraph.html (Second Frame – Paragraph):

```
<!DOCTYPE html>
<html>
<head>
<title>Paragraph Frame</title>
</head>
<body>
<p>
This is a sample paragraph inside the second frame.
Frames are a way to divide the browser window into multiple sections
where each section can load a separate HTML document.
</p>
</body>
</html>
```

3)link.html (Third Frame –Hyperlink):

```
<!DOCTYPE html>
<html>
<head>
<title>Link Frame</title>
</head>
<body>
```

```
<a href="https://www.google.com" target="_blank">Visit
google.com</a>
</body>
</html>
```

Output:

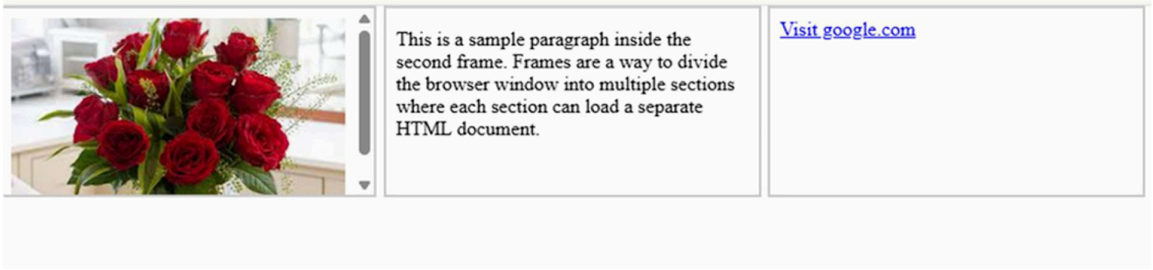

3. HTML 5 and Cascading Style Sheets, Types of CSS

3a) Write a HTML program, that makes use of <article>, <aside>,<figure>, <figcaption>, <footer>, <header>, <main>, <nav>, <section>, , tags.

Program:

```
<!DOCTYPE html>
<html> <head>
<title>HTML Semantic Tags Example</title>
<style>
body {
font-family: Arial, sans-serif;
margin: 0;
padding: 0;
}
header {
background-color: #333;
color: white;
padding: 10px 20px;
text-align: center;
}
nav {
background-color: #444;
padding: 10px;
text-align: center;
}
nav a {
color: white;
padding: 0 15px;
text-decoration: none;
}
main {
display: flex;
margin: 20px;
}
article {
flex: 2;
padding: 20px;
background-color: #f4f4f4;
```

```
margin-right: 20px;
}
aside {
flex: 1;
padding: 20px;
background-color: #f0f0f0;
}
section {
margin-bottom: 20px;
}
figure {
margin: 20px;
text-align: center;
}
figcaption {
font-style: italic;
color: #555;
}
footer {
background-color: #333;
color: white;
text-align: center;
padding: 10px;
position: relative;
bottom: 0;
width: 100%;
}
.highlight {
color: blue;
font-weight: bold;
}
</style>
</head>
<body>
<header>
<h1>Welcome to My Webpage</h1>
</header>
<nav>
<a href="#">Home</a>
```

```
<a href="#">About</a>
<a href="#">Blog</a> <a
href="#">Contact</a>
</nav>
<main>
<article>
<header>
<h2>Article Title</h2>
<p><span class="highlight">Published:</span> September 26,
2024</p>
</header>
<section>
<h3>Introduction</h3>
<p>This is the introductory section of the article. In this section, we'll
Cover the basics of HTML5 semantic elements.</p>
</section>
<section>
<h3>Main Content</h3>
<p>
The use of semantic HTML tags improves the structure and
accessibility
Of web content.
By using tags like <code>&lt;article&gt;</code>,
<code>&lt;aside&gt;</code>, and <code>&lt;figure&gt;</code>,
developers can create more meaningful and organized web pages.
</p>
</section>
<figure>
<img src="example.webp" alt="Example Image" width="400px">
<figcaption>Figure 1: A beautiful example image</figcaption>
</figure>
<section>
<h3>Conclusion</h3>
<p>
In conclusion, using semantic tags in HTML is essential for modern
web
development.
It enhances accessibility and helps search engines better understand
your
```

```
content.
</p>
</section>
<footer>
<p>Article Footer: Author's Name</p>
</footer>
</article>
<aside>
<h3>Related Articles</h3>
<ul>
<li><a href="#">Understanding Semantic HTML</a></li>
<li><a href="#">CSS Flexbox vs Grid</a></li>
<li><a href="#">Accessibility in Web Design</a></li>
</ul>
<h3>About the Author</h3>
<p>
This article was written by <span class="highlight">John Doe</span>,
A web development enthusiast with a passion for teaching others how
to create accessible, well-structured websites.
</p>
</aside>
</main>
<footer>
<p>&copy; 2024 My Webpage. All rights reserved.</p>
</footer>
</body>
</html>
```

Output:

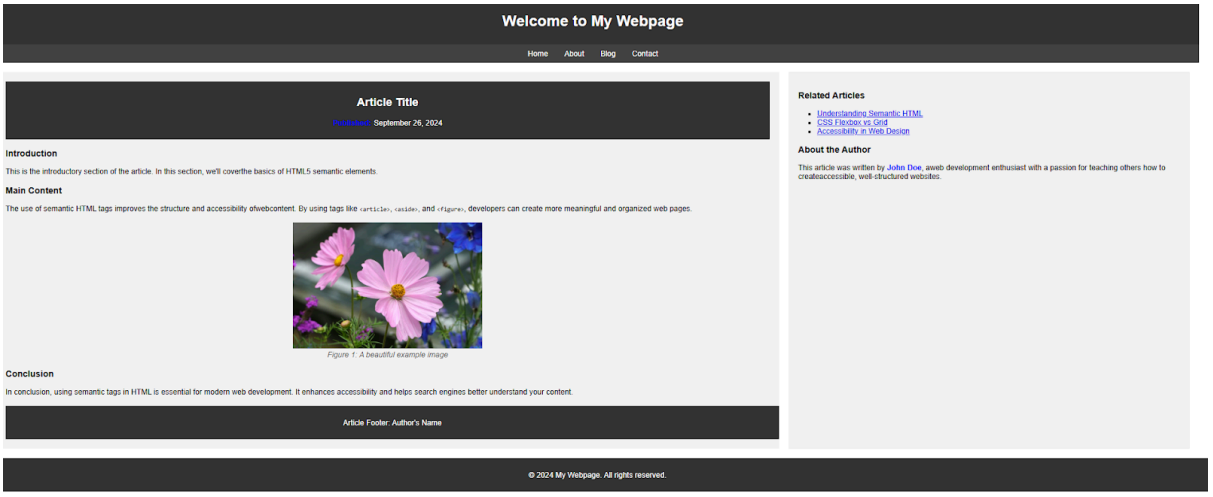
Welcome to My Webpage
Home
About
Blog
Contact
Article Title
Published: September 26, 2024
Introduction
This is the introductory section of the article. In this section, we'll coverthe basics of HTML5 semantic elements.
Main Content
The use of semantic HTML tags improves the structure and accessibility ofwebcontent. By using tags like <article>, <aside>, and <figure>, developers can create more meaningful and organized web pages.
Figure 1: A beautiful example image
Conclusion
In conclusion, using semantic tags in HTML is essential for modern web development. It enhances accessibility and helps search engines better understand your content.
Article Footer: Author's Name
Related Articles
Understanding Semantic HTML
CSS Flexbox vs Grid
Accessibility in Web Design
About the Author
This article was written by John Doe, aweb development enthusiast with a passion for teaching others how to createaccessible, well-structured websites.
© 2024 My Webpage. All rights reserved.

3b) Write a HTML program, to embed audio and video into HTML web page.

Program:

```
<!DOCTYPE html>
<html lang="en">
<head>
<title>Embed Audio and Video Example</title>
<style>
body {
font-family: Arial, sans-serif;
margin: 20px;
}
h1 {
text-align: center;
}
.media-container {
display: flex;
flex-direction: column;
align-items: center;
margin: 20px 0;
}
audio, video {
width: 80%;
max-width: 600px;
margin: 10px 0;
}
</style>
</head>
<body>
<h1>Embed Audio and Video in HTML</h1>
<div class="media-container">
<h2>Audio Example</h2>
<audio controls>
<source src="elephant-58368.mp3" type="audio/mpeg">
<source src="elephant-58368.ogg" type="audio/ogg">
Your browser does not support the audio element.
</audio>
</div>
```

```
<div class="media-container">
<h2>Video Example</h2>
<video controls>
33
<source src="180699-864967760_medium.mp4" type="video/mp4">
<source src="180699-864967760_medium.ogg" type="video/ogg">
Your browser does not support the video element.
</video>
</div>
</body>
</html>
```

Output:

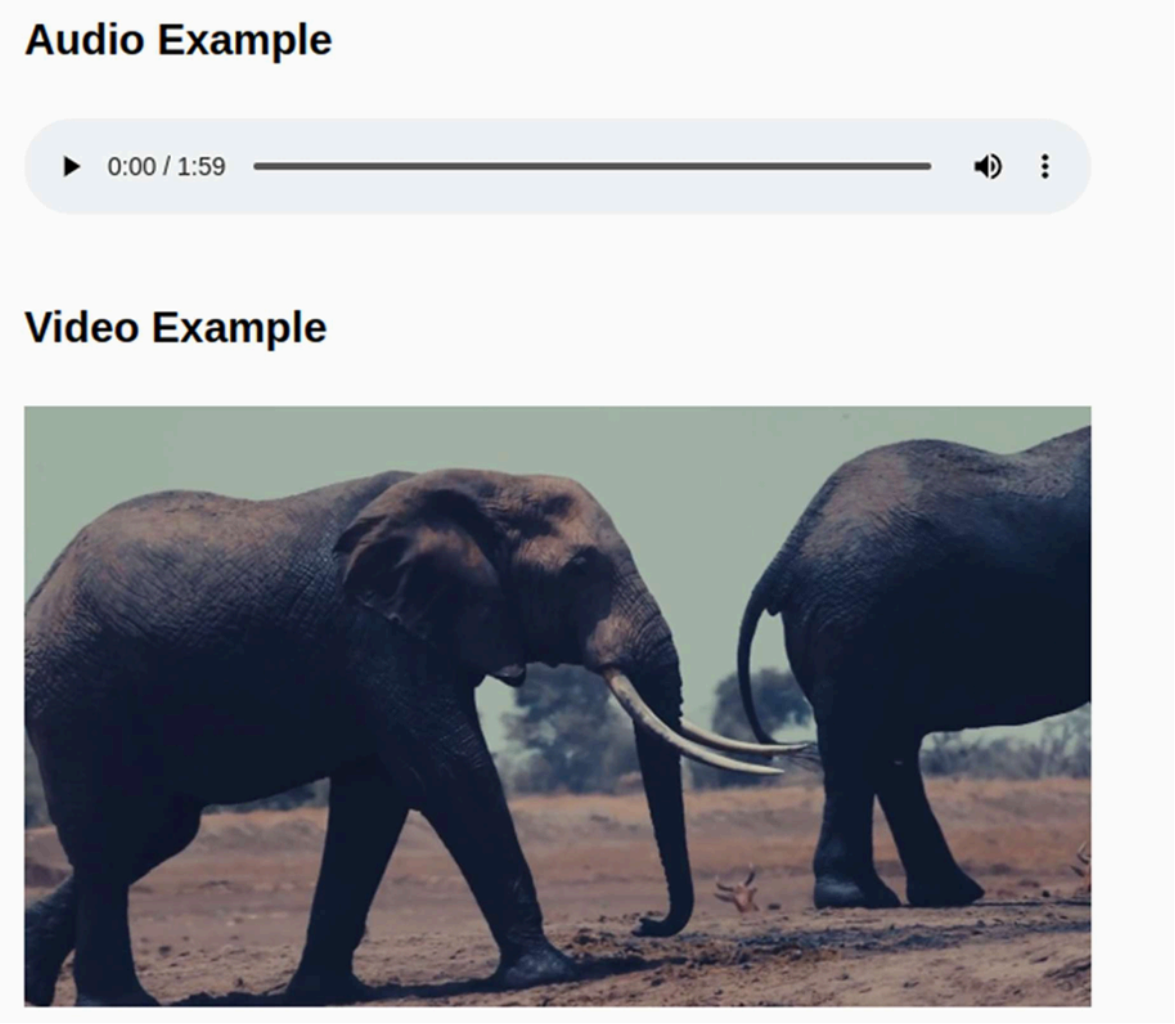

3c) Write a program to apply different types (or levels of styles or style specification formats) - inline, internal, external styles to HTML elements. (identify selector, property and value).

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>Types of CSS</title>
<style>
h2{
color:blue;
text-align:center;
}
p{
color:green;
font-size:18px;
}
</style>
<link rel="stylesheet" href="style.css">
</head>
<body>
<h2>Internal Style Example</h2>
<p>This paragraph uses internal CSS</p>
<h3 style="color:red; font-size:20px;">
This heading uses Inline CSS
</h3>
<h4>This heading uses External CSS</h4>
</body>
</html>
```

Output:

4. Selector forms
4a) Write a program to apply different types of selector forms
i. Simple selector (element, id, class, group, universal)
ii. Combinator selector (descendant, child, adjacent sibling, general sibling)
iii. Pseudo-class selector
iv. Pseudo-element selector
v. Attribute selector

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>CSS Selectors</title>
<style>
p{
color:blue;
}
#id1{
color:red;
}
.class1{
color:green;
}
h1,h2{
text-align:center;
}
*{
font-family:Arial;
}
div p{
color:purple;
}
div > h3{
color:brown;
}
h4 + p{
color:orange;
```

```
}
h4 ~ span{
color:pink;
}
a:hover{
color:red;
}
p::first-letter{
font-size:30px;
color:darkblue;
}
input[type="text"]{
background-color:lightgray;
}
</style>
</head>
<body>
<h1>Group Selector</h1>
<h2>Group Selector</h2>
<p>Element Selector Example</p>
<p id="id1">ID Selector Example</p>
<p class="class1">Class Selector Example</p>
<div>
<p>Descendant Selector</p>
<h3>Child Selector</h3>
</div>
<h4>Adjacent Sibling Example</h4>
<p>This paragraph uses adjacent sibling selector</p>
<span>General sibling 1</span>
<span>General sibling 2</span>
<br><br>
<a href="#">Hover over this link</a>
<p>Pseudo Element Example</p>
<br>
<input type="text" placeholder="Attribute selector">
</body>
</html>
```

Output:

Element Selector Example

ID Selector Example

Class Selector Example

Descendant Selector

Child Selector

Adjacent Sibling Example

This paragraph uses adjacent sibling selector

General sibling 1 General sibling 2

Hover over this link

Pseudo Element Example

www

Group Selector

Group Selector

5. CSS with Color, Background, Font, Text and CSS Box Model

5a) Write a program to demonstrate the various ways you can reference a color in CSS.

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>CSS Color Reference</title>
<style>
h1{
color:red;
}
h2{
color:#0000FF;
}
h3{
color:rgb(0,255,0);
}
h4{
color:hsl(300,100%,50%);
}
p{
background-color:yellow;
color:black;
}
</style>
</head>
<body>
<h1>Color using Name</h1>
<h2>Color using Hexadecimal</h2>
<h3>Color using RGB</h3>
<h4>Color using HSL</h4>
<p>Background color example</p>
</body>
</html>
```

Output:

Color using Name

Color using Hexadecimal

Color using RGB

Color using HSL

Background color example

5b) Write a CSS rule that places a background image halfway down the page, tilting it horizontally. The image should remain in place when the user scrolls up or down.

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>Background Image Example</title>
<style>
body{
background-image:url("image.png");
background-repeat:no-repeat;
background-position:center 50%;
background-attachment:fixed;
}
</style>
</head>
<body>
<h2>Background Image Demo</h2>
<p>Scroll the page to see that the background image stays fixed.</p>
<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.</p>
<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.</p>
<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.</p>
<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.</p>
<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.</p>
<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.</p>
<p>Lorem ipsum dolor sit amet, consectetur adipiscing elit.</p>
</body>
</html>
```

Output:

Background Image Demo

Scroll the page to see that the background image stays fixed.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

5c) Write a program using the following terms related to CSS font and text:

i. Font-size
ii. Font-weight
iii. Font-style
iv. Text-decoration
v. text-transformation
vi. Text-alignment

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>CSS Font and Text Properties</title>
<style>
p.size{
font-size:24px;
}
p.weight{
font-weight:bold;
}
p.style{
font-style:italic;
}
p.decoration{
text-decoration:underline;
}
p.transform{
text-transform:uppercase;
}
p.align{
text-align:center;
}
</style>
</head>
<body>
<p class="size">Example for font-size</p>
<p class="weight">Example for font-weight</p>
<p class="style">Example for font-style</p>
```

```
<p class="decoration">Example for text-decoration</p>
<p class="transform">Example for text-transform</p>
<p class="align">Example for text-align</p>
</body>
</html>
```

Output:

Example for font-size

Example for font-weight

Example for font-style

Example for text-decoration

EXAMPLE FOR TEXT-TRANSFORM

Example for text-align

5d) Write a program, to explain the importance of CSS Box model using i. Content ii. Border iii. Margin iv. Padding

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>CSS Box Model</title>
<style>
div{
width:200px;
background-color:lightblue;
padding:20px;
border:5px solid black;
margin:30px;
}
</style>
</head>
<body>
<h2>CSS Box Model Example</h2>
<div>
This box shows content, padding, border and margin.
</div>
</body>
</html>
```

Output:

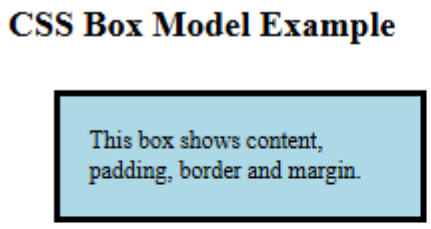

6. Applying JavaScript – internal and external, I/O, Type Conversion

6a) Write a program to embed internal and external JavaScript in a web page.

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>Internal and External JavaScript</title>
<script>
function internalJS(){
document.getElementById("demo1").innerHTML="This is Internal
JavaScript";
}
</script>
<script src="script.js"></script>
</head>
<body>
<h2>JavaScript Example</h2>
<button onclick="internalJS()">Internal JavaScript</button>
<p id="demo1"></p>
<button onclick="externalJS()">External JavaScript</button>
<p id="demo2"></p>
</body>
</html>
```

Output:

JavaScript Example

Internal JavaScript

This is Internal JavaScript

External JavaScript

This is External JavaScript

6b) Write a program to explain the different ways for displaying output.

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>JavaScript Output Methods</title>
<script>
function showOutput(){
document.getElementById("p1").innerHTML="Output using
innerHTML";
alert("Output using alert box");
console.log("Output using console");
}
</script>
</head>
<body>
<h2>JavaScript Output Methods</h2>
<button onclick="showOutput()">Click Here</button>
<p id="p1"></p>
<script>
document.write("Output using document.write<br>");
</script>
</body>
</html>
```

Output:

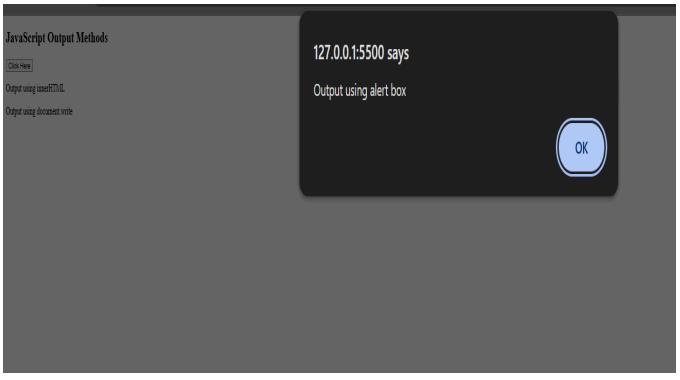



6c) Write a program to explain the different ways for taking input.

Program:

```
<!DOCTYPE html>
<html>
<head>
<title>JavaScript Input Methods</title>
<script>
function showInput(){
var a=document.getElementById("t1").value;
var b=document.getElementsByName("gender")[0].checked ? "Male" :
"Female";
var c=document.getElementById("city").value;
var d=prompt("Enter your age");
document.getElementById("result").innerHTML=
"Textbox: "+a+"<br>"+
"Radio Button: "+b+"<br>"+
"Dropdown: "+c+"<br>"+
"Prompt: "+d;
}
</script>
</head>
<body>
<h2>Input Methods Example</h2>
Name:
<input type="text" id="t1"><br><br>
Gender:
<input type="radio" name="gender">Male
<input type="radio" name="gender">Female
<br><br>
City:
<select id="city">
<option>Hyderabad</option>
<option>Chennai</option>
<option>Bangalore</option>
</select>
<br><br>
<button onclick="showInput()">Submit</button>
<p id="result"></p>
```

```
</body>
</html>
```
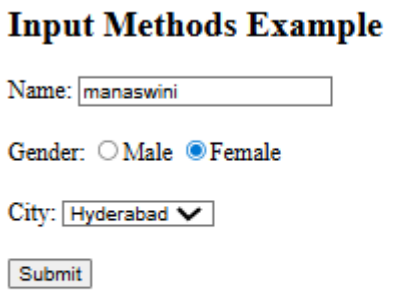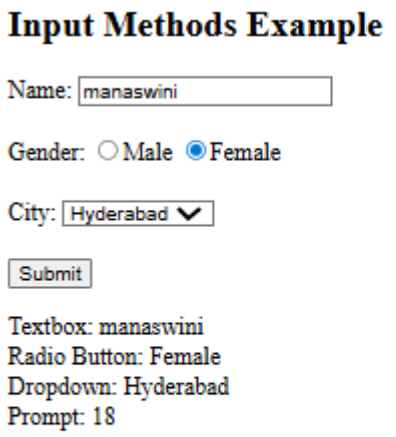
Output: