
False positive rate (FPR):

$$P(\text{test} + \mid \text{input} -)$$

False negative rate (FNR):

$$P(\text{test} - \mid \text{input} +)$$

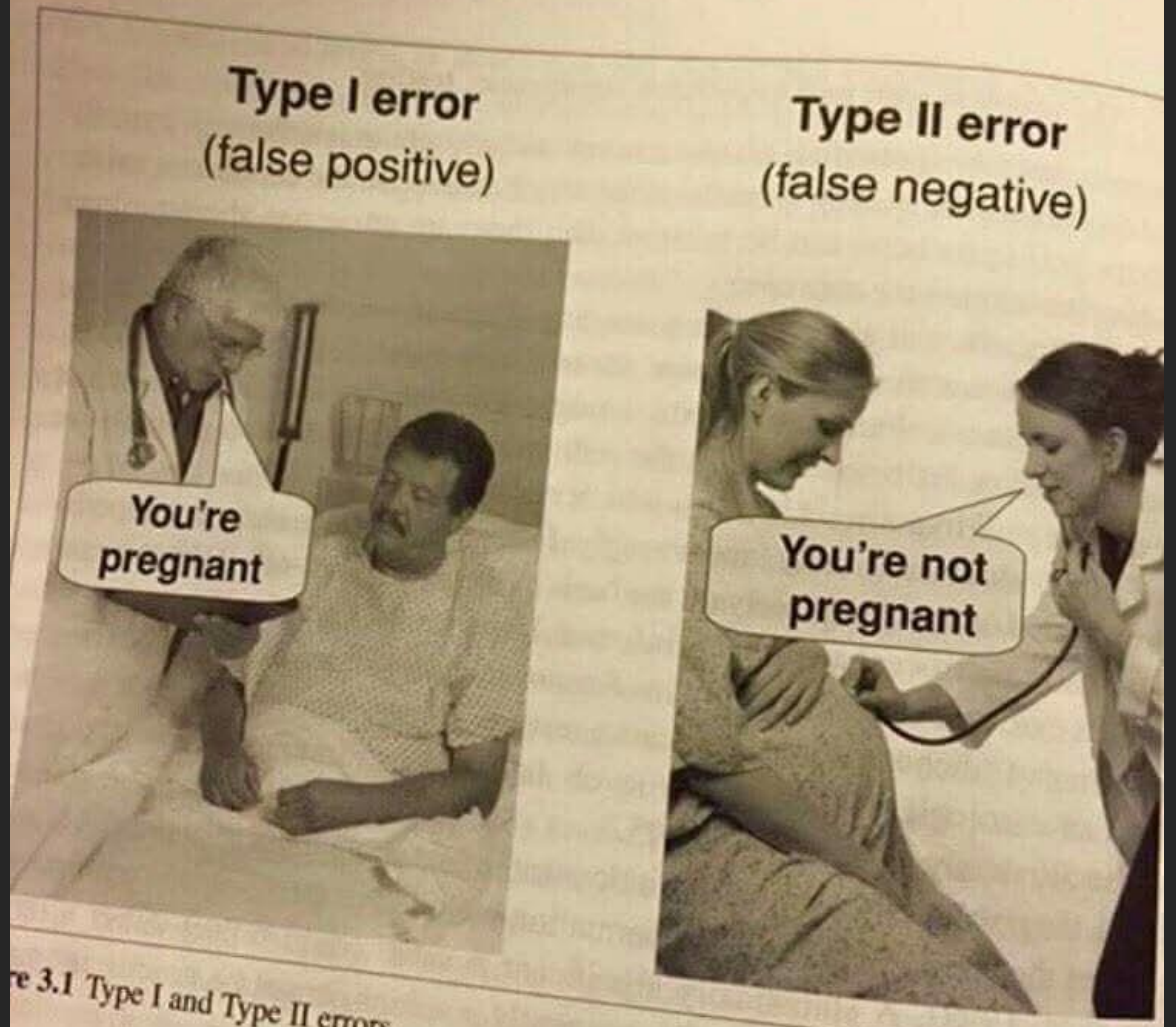

re 3.1 Type I and Type II errors

levels to .01 or even .001



Shobhit Bakliwal
@shobhitic

really efficient algorithm that tells whether a number is prime or not very very quickly with > 95% accuracy

```
6  bool is_prime(int x)
7  {
8  }
```

```
test no.99989: passed
test no.99990: passed
test no.99991: failed
test no.99992: passed
test no.99993: passed
test no.99994: passed
test no.99995: passed
test no.99996: passed
test no.99997: passed
test no.99998: passed
test no.99999: passed
95.121% tests passed
```




Shobhit Bakliwal
@shobhitic

really efficient algorithm that tells whether a number is prime or not very very quickly with > 95% accuracy

```
6  bool is_prime(int x)
7      return false;
8  }
```

```
test no.99989: passed
test no.99990: passed
test no.99991: failed
test no.99992: passed
test no.99993: passed
test no.99994: passed
test no.99995: passed
test no.99996: passed
test no.99997: passed
test no.99998: passed
test no.99999: passed
95.121% tests passed
```


```
6  bool is_prime(int x)
7      return false;
8  }
```

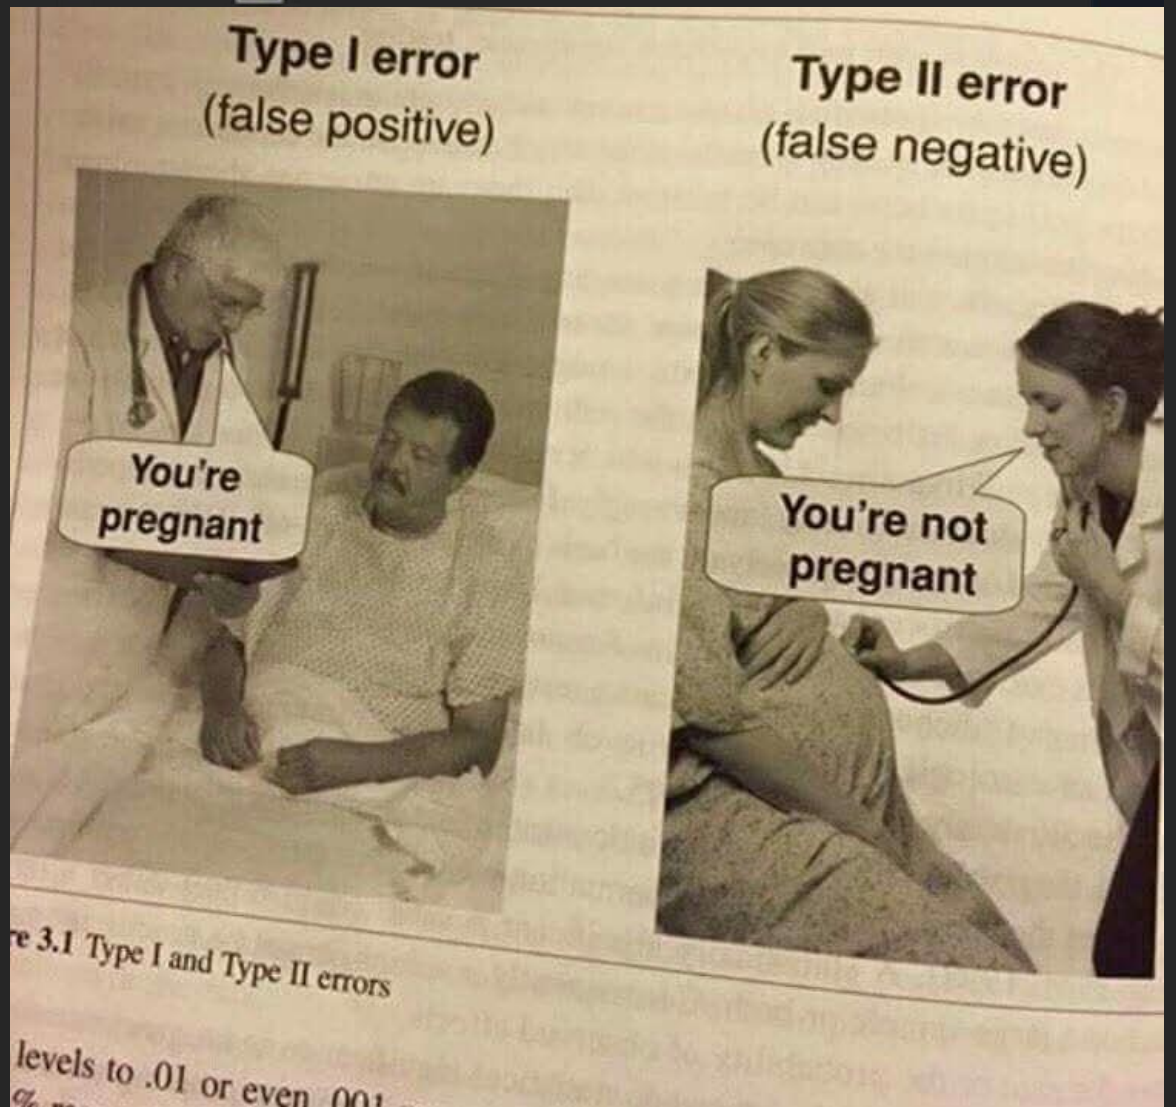


re 3.1 Type I and Type II errors

levels to .01 or even .001

```
6  bool is_prime(int x)
7      return false;
8  }
```

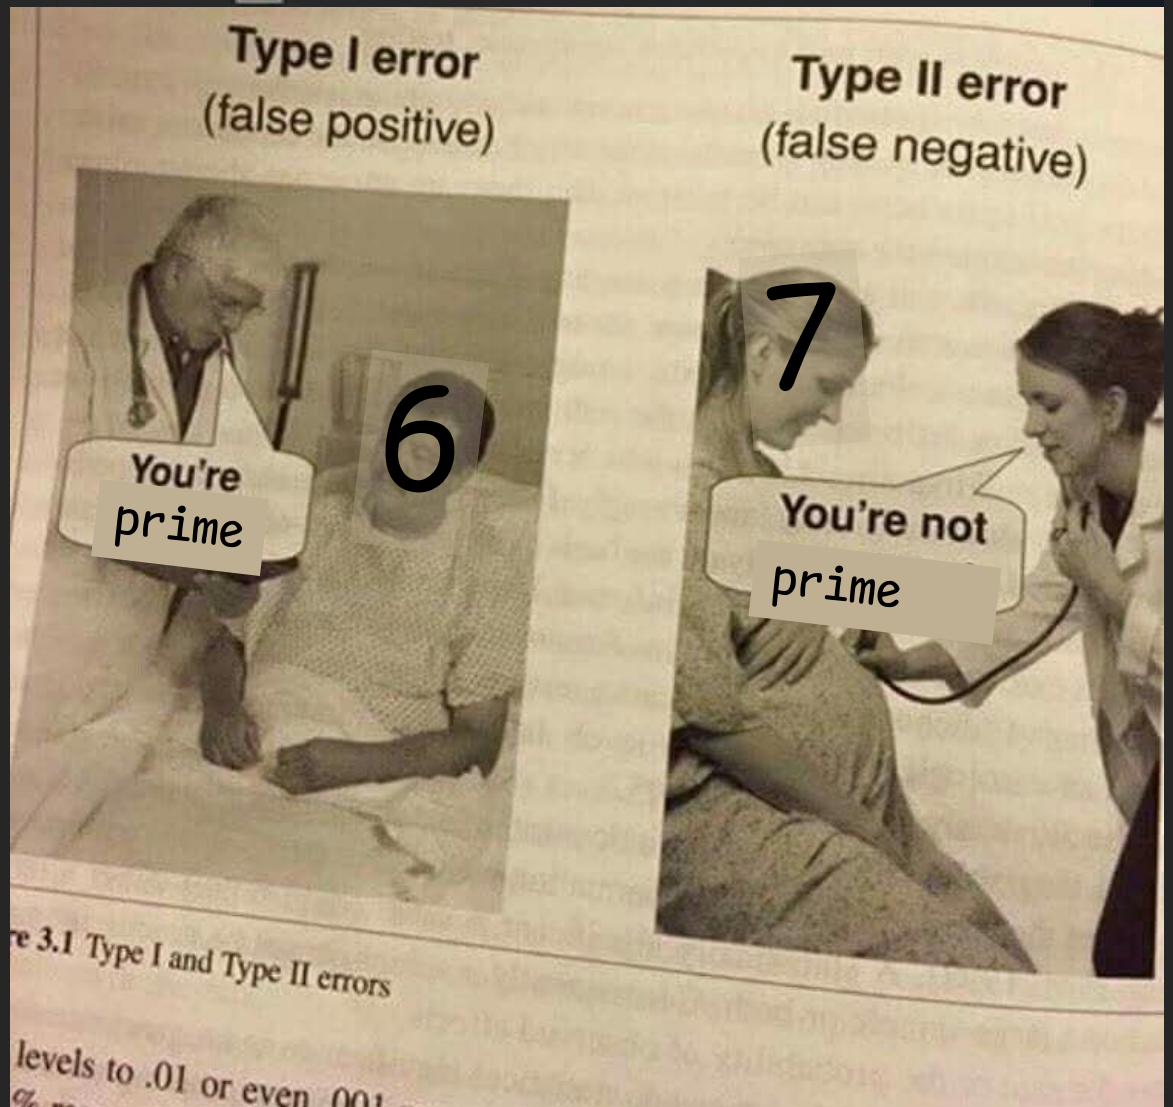


```
6  bool is_prime(int x)
7      return false;
8  }
```

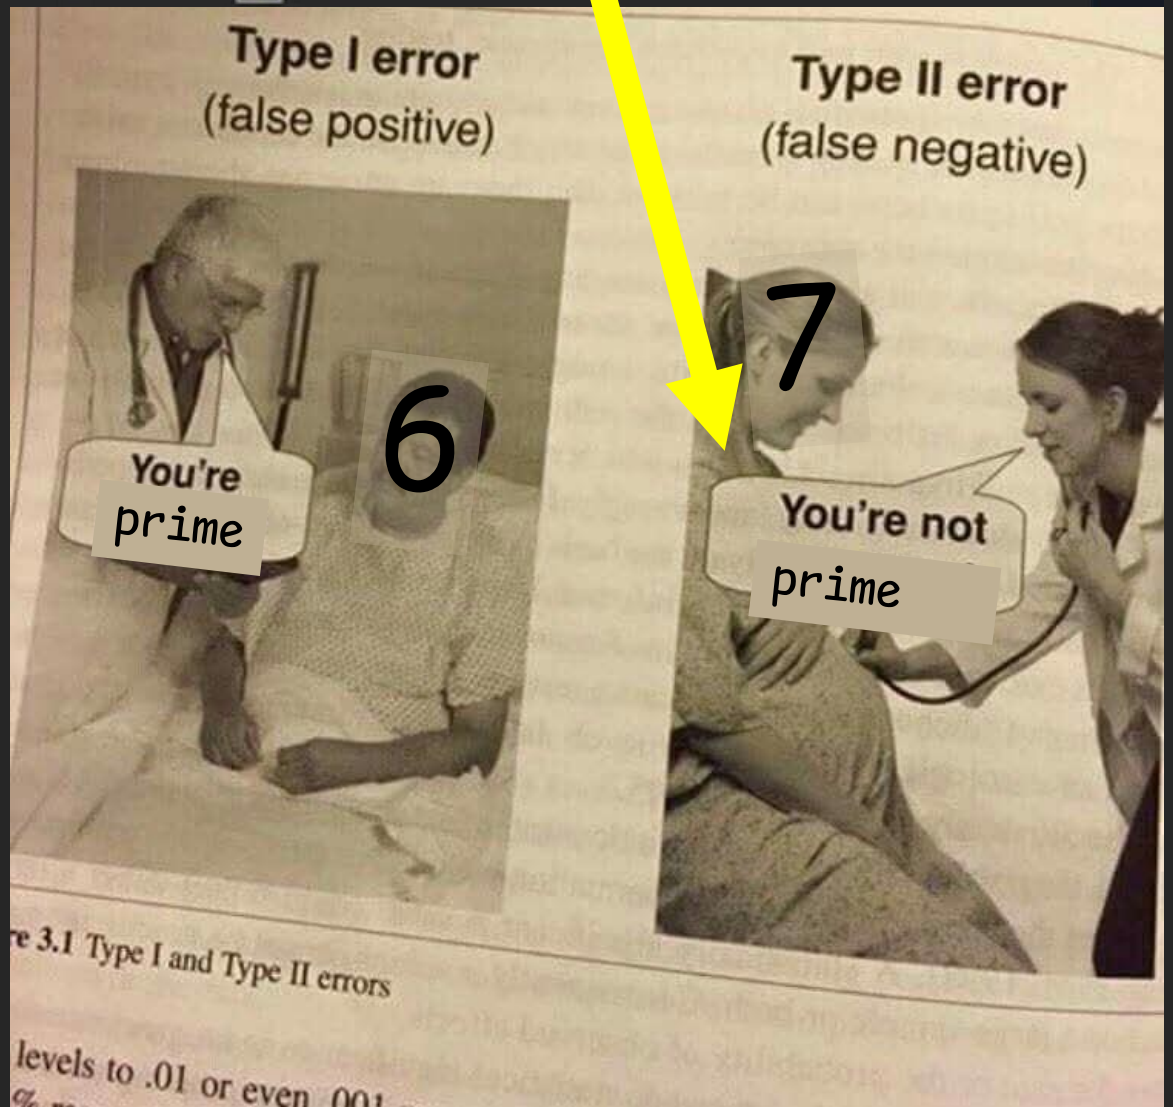


re 3.1 Type I and Type II errors

levels to .01 or even .001

```
6  bool is_prime(int x)
7      return false;
8  }
```

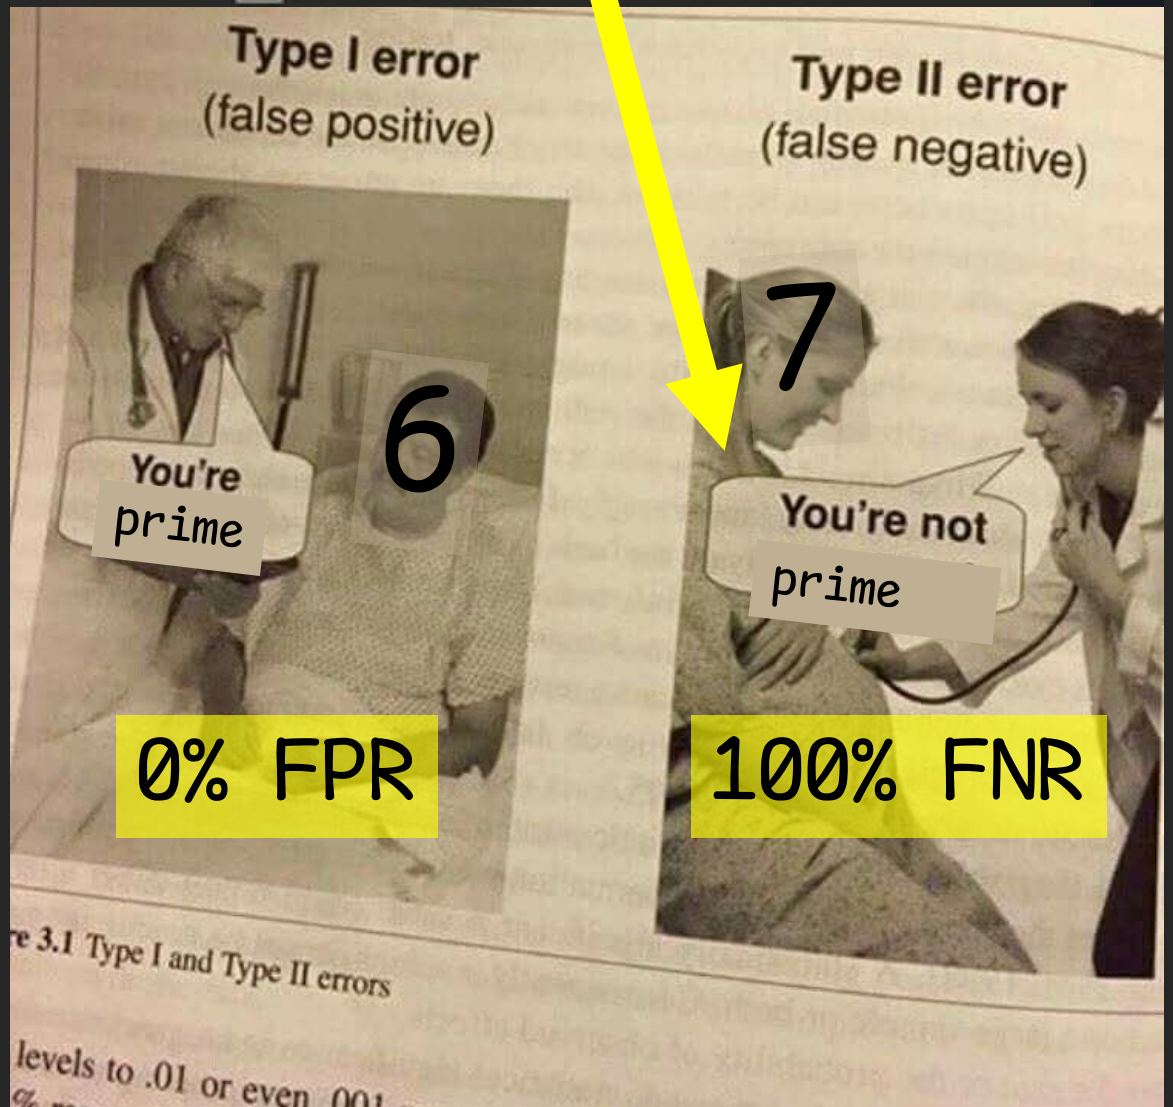

```
6  bool is_prime(int x)
7      return false;
8  }
```

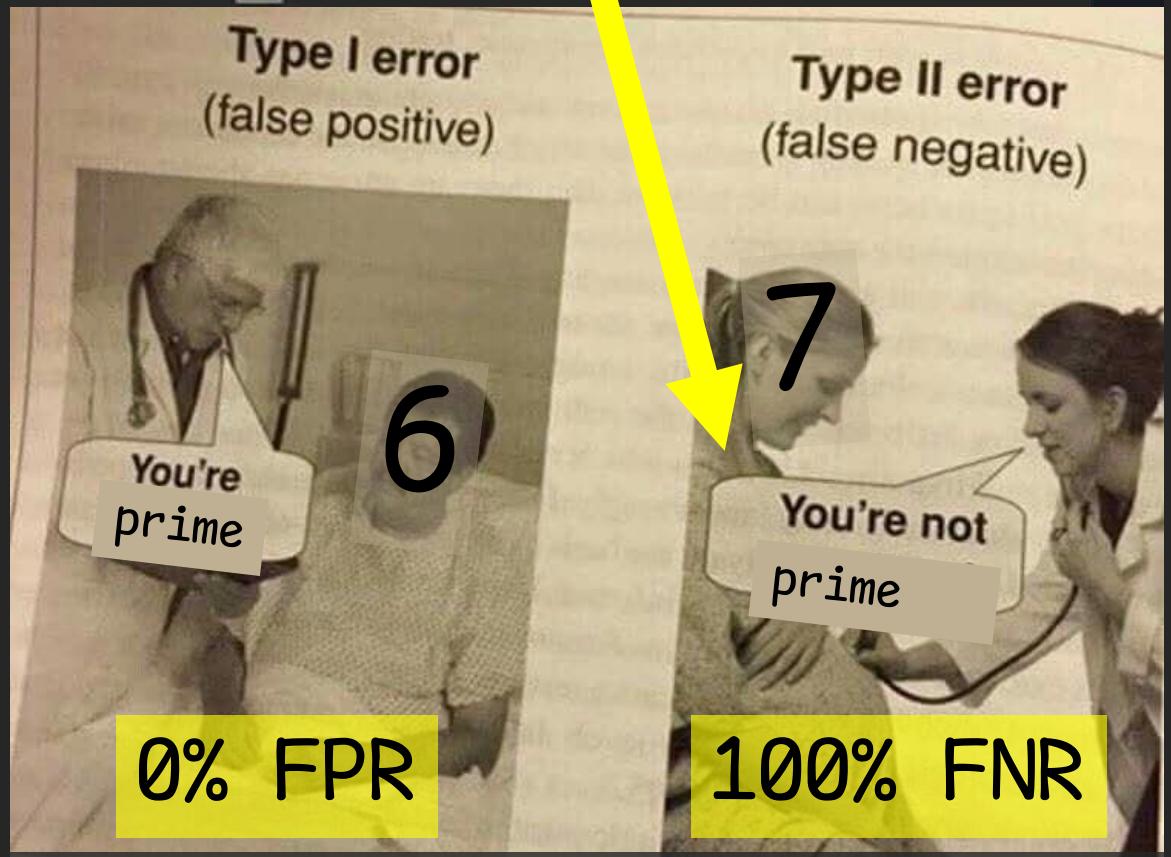

Moral: accuracy is bad metric on very imbalanced data. Use FPR and FNR instead.