

# Agent Modes / Settings

## Conversation-Level

When starting a new Agent conversation, users can choose between multiple modes:

- **Planning:** Agent can plan before executing tasks. Use for deep research, complex tasks, or collaborative work. In this mode, the Agent organizes its work in task groups, produces Artifacts, and takes other steps to thoroughly research, think through, and plan its work for optimal quality.
- **Fast:** Agent will execute tasks directly. Use for simple tasks that can be completed faster, such as renaming variables, kicking off a few bash commands, or other smaller, localized tasks. This is helpful for when speed is an important factor, and the task is simple enough that there is low worry of worse quality.

## Overall Settings

Settings across every Agent conversation can be found in the “Agent” tab of the Settings pane. Some of the major ones include:


### Artifact Review Policy

These are the possible options for Artifact Review Policy:


- **Always Proceed:** Agent never asks for review
- **Request Review:** Agent always asks for review

When Agent decides to request review from the user for implementation plans, this policy determines what the agent does. When set to “Request Review”, the agent will always terminate after notifying, allowing the user to spend time reviewing the plan and adding comments to augment proposed changes.

## Agent > Agent Modes / Settings

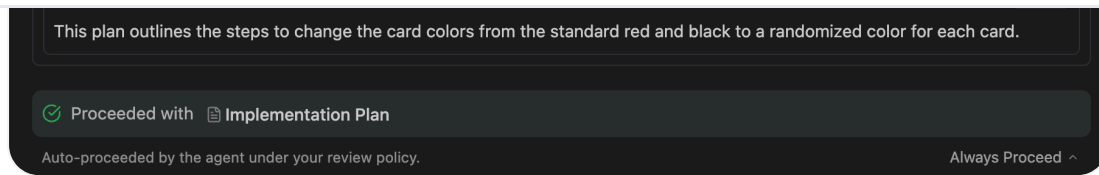

If you do not need to manually review Agent's plan before making changes, set this to "Always Proceed", in which case every time the agent decides to request review from the user, it will then immediately continue with executing the plan.

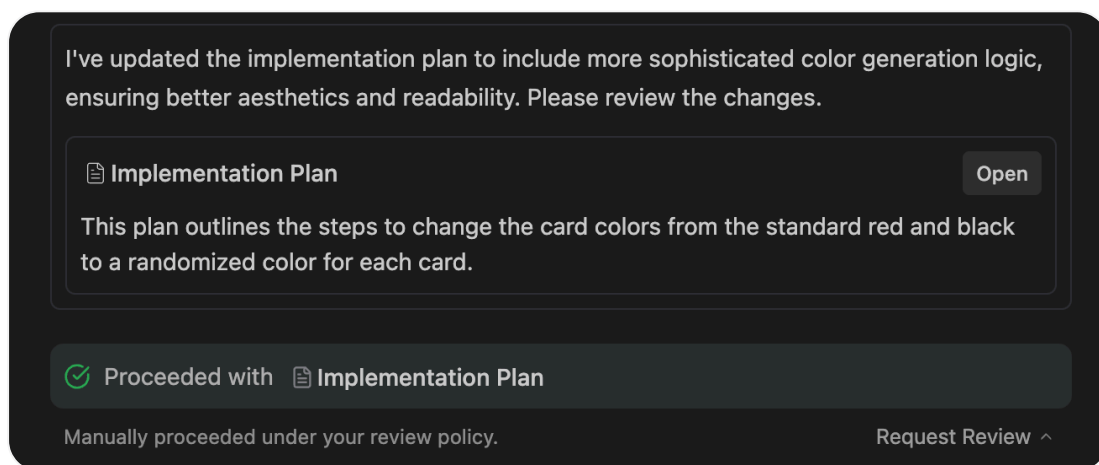

## Terminal Command Auto Execution

For the terminal command generation tool:

- Request Review: Never auto-execute terminal commands (except those in a configurable Allow list)
- Always Proceed: Agent never asks for review (except those in a configurable Deny list)

## Agent Non-Workspace File Access

Allow Agent to view and edit files outside of the current workspace. By default, the Agent only has access to the files in the workspace and in the application's root folder `~/.antigravity/`, which contains Artifacts, Knowledge Items, and other Antigravity-specific data.

Use with caution, as this could expose local secret or sensitive data to the Agent.

---

 **Agent > Agent Modes / Settings**

---

[< Models](#)

**Agent Permissions** [>](#)