

RÉPUBLIQUE ALGÉRIENNE DÉMOCRATIQUE ET POPULAIRE
Ministère de l'Enseignement Supérieur et de la Recherche Scientifique
École nationale Supérieure d'Informatique (ESI ex. INI)



1^{ère} Année Cycle Supérieur (1CS)

DNS

Compte Rendu du TP9

Par : Binôme n°3 du groupe 5


Membres :

- **LAKACHE Aya**
- **OUTMOUNE Manel**

I. Site Algérien www.esi-sba.dz

1. Ping www.esi-sba.dz	<pre> aya@aya-VirtualBox:~\$ ping www.esi-sba.dz PING www.esi-sba.dz (41.111.227.3) 56(84) bytes of data. 64 bytes from 41.111.227.3 (41.111.227.3): icmp_seq=1 ttl=48 time=41.6 ms 64 bytes from 41.111.227.3 (41.111.227.3): icmp_seq=2 ttl=48 time=55.9 ms 64 bytes from 41.111.227.3 (41.111.227.3): icmp_seq=3 ttl=48 time=40.4 ms 64 bytes from 41.111.227.3 (41.111.227.3): icmp_seq=4 ttl=48 time=53.3 ms 64 bytes from 41.111.227.3 (41.111.227.3): icmp_seq=5 ttl=48 time=48.1 ms ^C --- www.esi-sba.dz ping statistics --- 5 packets transmitted, 5 received, 0% packet loss, time 4041ms rtt min/avg/max/mdev = 40.417/47.843/55.861/6.139 ms </pre>
2. Executer la commande nslookup puis server	<pre> aya@aya-VirtualBox:~\$ nslookup > server Default server: 8.8.8.8 Address: 8.8.8.8#53 </pre>
3. Demander la liste des Serveurs DNS Racines	<pre> > set q=NS > . Server: 8.8.8.8 Address: 8.8.8.8#53 Non-authoritative answer: . nameserver = d.root-servers.net. . nameserver = f.root-servers.net. . nameserver = l.root-servers.net. . nameserver = k.root-servers.net. . nameserver = m.root-servers.net. . nameserver = h.root-servers.net. . nameserver = i.root-servers.net. . nameserver = c.root-servers.net. . nameserver = b.root-servers.net. . nameserver = j.root-servers.net. . nameserver = g.root-servers.net. . nameserver = e.root-servers.net. . nameserver = a.root-servers.net. </pre> Pour avoir l'@ Ip du serveur racine a.root-servers.net <pre> > set q=A > a.root-servers.net. Server: 8.8.8.8 Address: 8.8.8.8#53 Non-authoritative answer: Name: a.root-servers.net Address: 198.41.0.4 </pre>
4. Interroger le serveur DNS Racine(.) → a.root-servers.net	4.1. Exécuter la commande set q=NS puis demander la liste des serveurs DNS du domaine DZ <pre> > server 198.41.0.4 Default server: 198.41.0.4 Address: 198.41.0.4#53 > set q=NS > dz. Server: 198.41.0.4 Address: 198.41.0.4#53 Non-authoritative answer: *** Can't find dz.: No answer Authoritative answers can be found from: dz nameserver = ns1.nic.dz. dz nameserver = ns3.nic.fr. dz nameserver = ns5.nic.dz. dz nameserver = ns2.nic.dz. dz nameserver = ns-dz.aftrinic.net. dz nameserver = ns4.nic.dz. ns1.nic.dz internet address = 193.194.64.242 ns1.nic.dz has AAAA address 2001:4340:1030:2::2 ns3.nic.fr internet address = 192.134.0.49 ns3.nic.fr has AAAA address 2001:660:3006:1::1:1 ns5.nic.dz internet address = 193.0.9.71 ns5.nic.dz has AAAA address 2001:67c:e0::71 ns2.nic.dz internet address = 213.179.160.66 ns-dz.aftrinic.net internet address = 196.216.168.36 ns-dz.aftrinic.net has AAAA address 2001:43f8:120::36 ns4.nic.dz internet address = 204.61.216.103 ns4.nic.dz has AAAA address 2001:500:14:6103:ad::1 </pre>


5. Interroger le Serveur DNS du domaine dz. → ns1.nic.dz.	5.1. Exécuter la commande set q=NS puis demander la liste des serveurs DNS du domaine esi-sba.dz <pre> > server 193.194.64.242 Default server: 193.194.64.242 Address: 193.194.64.242#53 > set q=NS > esi-sba.dz. Server: 193.194.64.242 Address: 193.194.64.242#53 Non-authoritative answer: *** Can't find esi-sba.dz.: No answer Authoritative answers can be found from: esi-sba.dz nameserver = ns3.esi-sba.dz. esi-sba.dz nameserver = ns1.esi-sba.dz. esi-sba.dz nameserver = ns2.esi-sba.dz. ns1.esi-sba.dz internet address = 41.111.227.2 ns2.esi-sba.dz internet address = 197.201.98.46 ns3.esi-sba.dz internet address = 197.201.98.42 </pre>
6. Interroger le Serveur DNS du domaine esi-sba.dz. → ns1.esi-sba.dz.	6.1. Exécuter la commande set q=A puis demander l'@Ip de la machine <u>www.esi-sba.dz</u> <pre> > server 41.111.227.2 Default server: 41.111.227.2 Address: 41.111.227.2#53 > set q=A > www.esi-sba.dz Server: 41.111.227.2 Address: 41.111.227.2#53 Name: www.esi-sba.dz Address: 41.111.227.3 </pre>

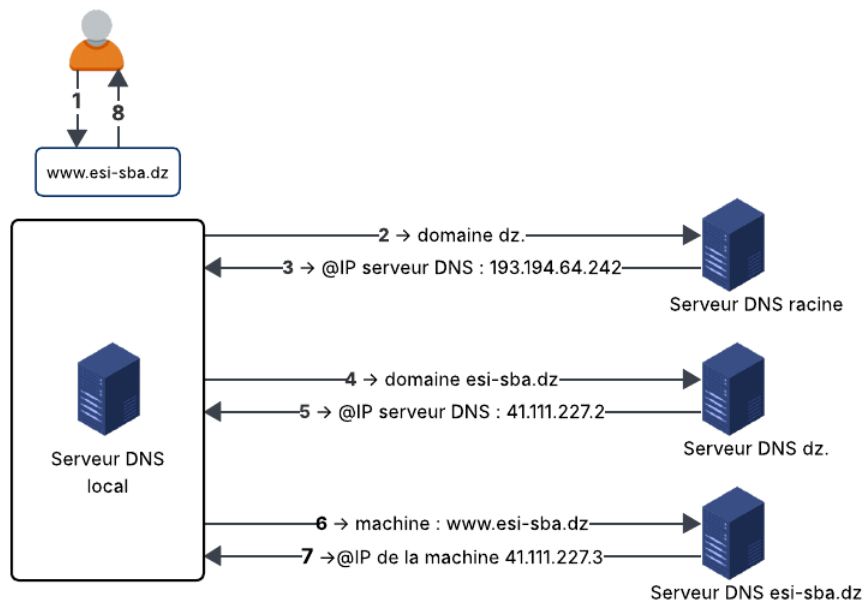

II. Site Divers www.utc.fr

1. Ping www.utc.fr	<pre> aya@aya-VirtualBox:~\$ ping www.utc.fr PING revproxy1.utc.fr (195.83.155.24) 56(84) bytes of data. 64 bytes from revproxy1.utc.fr (195.83.155.24): icmp_seq=1 ttl=44 time=60.4 ms 64 bytes from revproxy1.utc.fr (195.83.155.24): icmp_seq=2 ttl=44 time=75.2 ms 64 bytes from revproxy1.utc.fr (195.83.155.24): icmp_seq=3 ttl=44 time=53.7 ms 64 bytes from revproxy1.utc.fr (195.83.155.24): icmp_seq=4 ttl=44 time=50.0 ms 64 bytes from revproxy1.utc.fr (195.83.155.24): icmp_seq=5 ttl=44 time=50.1 ms ^C --- revproxy1.utc.fr ping statistics --- 5 packets transmitted, 5 received, 0% packet loss, time 4022ms rtt min/avg/max/mdev = 49.959/57.864/75.158/9.441 ms </pre>
2. Executer la commande nslookup puis server	<pre> aya@aya-VirtualBox:~\$ nslookup > server Default server: 8.8.8.8 Address: 8.8.8.8#53 </pre>
3. Demander la liste des Serveurs DNS Racines	<pre style="flex: 1;"> > set q=NS > . Server: 8.8.8.8 Address: 8.8.8.8#53 Non-authoritative answer: . nameserver = d.root-servers.net. . nameserver = f.root-servers.net. . nameserver = l.root-servers.net. . nameserver = k.root-servers.net. . nameserver = m.root-servers.net. . nameserver = h.root-servers.net. . nameserver = i.root-servers.net. . nameserver = c.root-servers.net. . nameserver = b.root-servers.net. . nameserver = j.root-servers.net. . nameserver = g.root-servers.net. . nameserver = e.root-servers.net. . nameserver = a.root-servers.net. </pre> Pour avoir l'@ Ip du serveur racine a.root-servers.net <pre style="background-color: #2e3436; color: #eeeeec; padding: 10px;"> > set q=A > a.root-servers.net. Server: 8.8.8.8 Address: 8.8.8.8#53 Non-authoritative answer: Name: a.root-servers.net Address: 198.41.0.4 </pre>
4. Interroger le serveur DNS Racine(.) → a.root-servers.net	a. Exécuter la commande set q=NS puis demander la liste des serveurs DNS du domaine fr <pre> > server 198.41.0.4 Default server: 198.41.0.4 Address: 198.41.0.4#53 > set q=NS > fr. Server: 198.41.0.4 Address: 198.41.0.4#53 Non-authoritative answer: *** Can't find fr.: No answer Authoritative answers can be found from: fr nameserver = f.ext.nic.fr. fr nameserver = d.nic.fr. fr nameserver = g.ext.nic.fr. f.ext.nic.fr internet address = 194.146.106.46 f.ext.nic.fr has AAAA address 2001:67c:1010:11::53 d.nic.fr internet address = 194.0.9.1 d.nic.fr has AAAA address 2001:678:c::1 g.ext.nic.fr internet address = 194.0.36.1 g.ext.nic.fr has AAAA address 2001:678:4c::1 </pre>

5. Interroger le Serveur DNS du domaine fr. → f.ext.nic.fr.	a. Exécuter la commande set q=NS puis demander la liste des serveurs DNS du domaine utc.fr. <pre> > server 194.146.106.46 Default server: 194.146.106.46 Address: 194.146.106.46#53 > set q=NS > utc.fr. Server: 194.146.106.46 Address: 194.146.106.46#53 Non-authoritative answer: *** Can't find utc.fr.: No answer Authoritative answers can be found from: utc.fr nameserver = ns.crihan.fr. utc.fr nameserver = dns1.utc.fr. utc.fr nameserver = dns2.utc.fr. dns2.utc.fr internet address = 195.83.155.15 dns1.utc.fr internet address = 195.83.155.16 ns.crihan.fr internet address = 195.221.20.10 dns2.utc.fr has AAAA address 2001:660:4201:1::3 dns1.utc.fr has AAAA address 2001:660:4201:1::2 ns.crihan.fr has AAAA address 2001:660:7401:201::10 </pre>
6. Interroger le Serveur DNS du domaine utc.fr. → dns1.utc.fr	a. Exécuter la commande set q=A puis demander l'@Ip de la machine www.utc.fr <pre> > server 195.83.155.16 Default server: 195.83.155.16 Address: 195.83.155.16#53 > set q=A > www.utc.fr Server: 195.83.155.16 Address: 195.83.155.16#53 www.utc.fr canonical name = revproxy1.utc.fr. Name: revproxy1.utc.fr Address: 195.83.155.24 </pre>

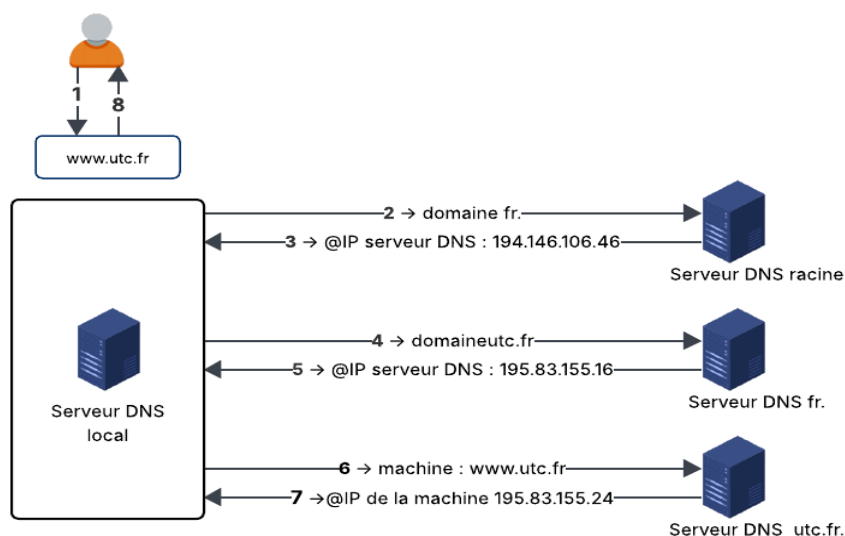

7. Site de votre choix wikipedia.org

1. Ping wikipedia.org	<pre> aya@aya-VirtualBox:~\$ ping www.wikipedia.org PING dyna.wikimedia.org (185.15.58.224) 56(84) bytes of data. 64 bytes from text-lb.drms.wikimedia.org (185.15.58.224): icmp_seq=1 ttl=49 time=41.4 ms 64 bytes from text-lb.drms.wikimedia.org (185.15.58.224): icmp_seq=2 ttl=49 time=40.4 ms 64 bytes from text-lb.drms.wikimedia.org (185.15.58.224): icmp_seq=3 ttl=49 time=41.5 ms 64 bytes from text-lb.drms.wikimedia.org (185.15.58.224): icmp_seq=4 ttl=49 time=44.5 ms 64 bytes from text-lb.drms.wikimedia.org (185.15.58.224): icmp_seq=5 ttl=49 time=43.2 ms ^C --- dyna.wikimedia.org ping statistics --- 5 packets transmitted, 5 received, 0% packet loss, time 4039ms rtt min/avg/max/mdev = 40.402/42.200/44.542/1.476 ms </pre>
2. Exécuter la commande nslookup puis server	<pre> aya@aya-VirtualBox:~\$ nslookup > server Default server: 8.8.8.8 Address: 8.8.8.8#53 </pre>
3. Demander la liste des Serveurs DNS Racines	<pre> > set q=NS > . Server: 8.8.8.8 Address: 8.8.8.8#53 Non-authoritative answer: . nameserver = d.root-servers.net. . nameserver = f.root-servers.net. . nameserver = l.root-servers.net. . nameserver = k.root-servers.net. . nameserver = m.root-servers.net. . nameserver = h.root-servers.net. . nameserver = i.root-servers.net. . nameserver = c.root-servers.net. . nameserver = b.root-servers.net. . nameserver = j.root-servers.net. . nameserver = g.root-servers.net. . nameserver = e.root-servers.net. . nameserver = a.root-servers.net. </pre> Pour avoir l'@ Ip du serveur racine a.root-servers.net <pre> > set q=A > a.root-servers.net. Server: 8.8.8.8 Address: 8.8.8.8#53 Non-authoritative answer: Name: a.root-servers.net Address: 198.41.0.4 </pre>
4. Interroger le serveur DNS Racine(.) → a.root-servers.net	a. Exécuter la commande set q=NS puis demander la liste des serveurs DNS du domaine org <pre> > server 198.41.0.4 Default server: 198.41.0.4 Address: 198.41.0.4#53 > set q=NS > org. Server: 198.41.0.4 Address: 198.41.0.4#53 Non-authoritative answer: *** Can't find org.: No answer Authoritative answers can be found from: org nameserver = a2.org.afiliast-nst.info. org nameserver = b2.org.afiliast-nst.org. org nameserver = d0.org.afiliast-nst.org. org nameserver = a0.org.afiliast-nst.info. org nameserver = b0.org.afiliast-nst.org. org nameserver = c0.org.afiliast-nst.info. a2.org.afiliast-nst.info internet address = 199.249.112.1 a2.org.afiliast-nst.info has AAAA address 2001:500:40::1 b2.org.afiliast-nst.org internet address = 199.249.120.1 b2.org.afiliast-nst.org has AAAA address 2001:500:48::1 d0.org.afiliast-nst.org internet address = 199.19.57.1 d0.org.afiliast-nst.org has AAAA address 2001:500:f::1 a0.org.afiliast-nst.info internet address = 199.19.56.1 a0.org.afiliast-nst.info has AAAA address 2001:500:e::1 b0.org.afiliast-nst.org internet address = 199.19.54.1 b0.org.afiliast-nst.org has AAAA address 2001:500:c::1 c0.org.afiliast-nst.info internet address = 199.19.53.1 c0.org.afiliast-nst.info has AAAA address 2001:500:b::1 </pre>

5. Interroger le Serveur DNS du domaine org → a2.org.afiliast.info	a. Exécuter la commande set q=A puis demander la liste des serveurs DNS du domaine wikipedia.org <pre> > server 199.249.112.1 Default server: 199.249.112.1 Address: 199.249.112.1#53 > set q=NS > wikipedia.org Server: 199.249.112.1 Address: 199.249.112.1#53 Non-authoritative answer: *** Can't find wikipedia.org: No answer Authoritative answers can be found from: wikipedia.org nameserver = ns2.wikimedia.org. wikipedia.org nameserver = ns0.wikimedia.org. wikipedia.org nameserver = ns1.wikimedia.org. ns2.wikimedia.org internet address = 198.35.27.27 ns1.wikimedia.org internet address = 208.80.153.231 ns0.wikimedia.org internet address = 208.80.154.238 </pre>
6. Interroger le Serveur DNS du domaine wikipedia.org → ns1.wikimedia.org	a. Exécuter la commande set q=A puis demander l'@Ip de la machine www.wikipedia.org <pre> > server 208.80.153.231 Default server: 208.80.153.231 Address: 208.80.153.231#53 > set q=A > www.wikipedia.org Server: 208.80.153.231 Address: 208.80.153.231#53 www.wikipedia.org canonical name = dyna.wikimedia.org. > set q=A > dyna.wikimedia.org. Server: 208.80.153.231 Address: 208.80.153.231#53 Name: dyna.wikimedia.org Address: 185.15.58.224 </pre>

