

Last updated on **May 4, 2026**

AI/BI administration guide

This page describes the account and workspace-level administrative controls that can be applied to AI/BI products.

Manage dashboard and Genie access

Users are granted entitlements at the workspace level that control how they interact with the Databricks workspace. See [Manage entitlements](#) for details about each access type.

Dashboards and Genie Spaces can be securely shared with the following user types:

- **Workspace users:** Permissions are scoped to the workspace where they are a member. To access multiple workspaces, they must be added to each workspace individually. Their access is controlled by entitlements that determine how they interact with data assets.
 - With the **Databricks SQL access** entitlement: Users can create new dashboards and Genie Spaces. Access can be granted to view, edit, and manage draft and published dashboards. Access can be granted to compute and Unity Catalog governed data.
 - With the **Consumer access** entitlement: Users can be granted access to published dashboards. Access can be granted to compute and Unity Catalog governed data. To learn more, see [What is consumer access?](#).
- **Account users:** Can be granted access to published dashboards with shared data permissions. Account users must be registered to your Databricks account, but they do not need access to any additional resources or to be added to a workspace. Account users can be assigned as recipients for dashboards or Genie Spaces across any workspace in the account. See [Share a dashboard](#) to learn more about published dashboards and shared data permissions.

To change the default workspace access for new users to Consumer access, see [Change default workspace access to consumer access](#). For more information about entitlements, see [Manage entitlements](#).

Capabilities by access type

The following table summarizes the capabilities associated with each access type:

Capability	Account member access	Consumer access	Databricks SQL access
View/run dashboards	✓	✓	✓
View/run Genie Spaces	✓	✓	✓
Enforce row- and column-level security on view		✓	✓
Query SQL warehouses using BI tools		✓	✓
Access Unity Catalog-governed data through third-party BI tools		✓	
Read/write AI/BI dashboards			✓
Read/write Genie Spaces			✓

NOTE

Account users can view dashboards published with shared or individual data permissions. However, account users cannot access data from workspace-bound securables, such as workspace-bound catalogs.

Network considerations

If IP access lists are configured, dashboards are only accessible if users access them from within the approved IP range, such as when using a VPN. This applies to all users, regardless of whether they are assigned to a workspace. For more information on configuring access, see [Manage IP access lists](#).

User and group management

All users registered with Databricks belong to your Databricks account. Registering a user in a Databricks account establishes a verifiable identity that Databricks can use for authentication when that user views a shared dashboard or Genie Space.

Organizing individual users into groups can make sharing easier for authors and editors. For example, an author can share with a single, named group instead of sharing with each user in the account.

NOTE

Users must have the appropriate data and compute privileges to interact with a Genie Space, which can only be granted to workspace users.

IMPORTANT

Dashboard account-level sharing supports email and one-time passcode authentication, as well as unified login with single sign-on (SSO). If a dashboard is shared when the recipient uses one-time passcode login and then the account is later configured for SSO with unified login, account admins should verify that dashboard recipients are allowed to access the Databricks account using their identity provider configuration. Users who aren't allowed to log in using SSO can no longer access dashboards that were previously shared with them.

Users can also share dashboards with any user, service principal, or group in their identity provider using automatic identity management. When shared, those users, service principals, and members of groups are automatically added to the Databricks account upon login. They are not added to the dashboard's originating workspace. For more information, see [Automatic identity management](#).


Users and groups can have access to zero, one, or multiple workspaces. Authors can add users and groups to a **People with access** list to assign specific permissions, as with other workspace objects, when sharing a dashboard or Genie Space.

For dashboards, they can configure **Sharing settings** with one of the following options:

- Only people with access can view
- Anyone in my account can view

If a dashboard is published with shared data permissions and shared with a specific user, group, or all users in the account, those users can access it regardless of whether they have access to the originating workspace.

The following image shows the relationship between users and groups at the workspace and account levels.

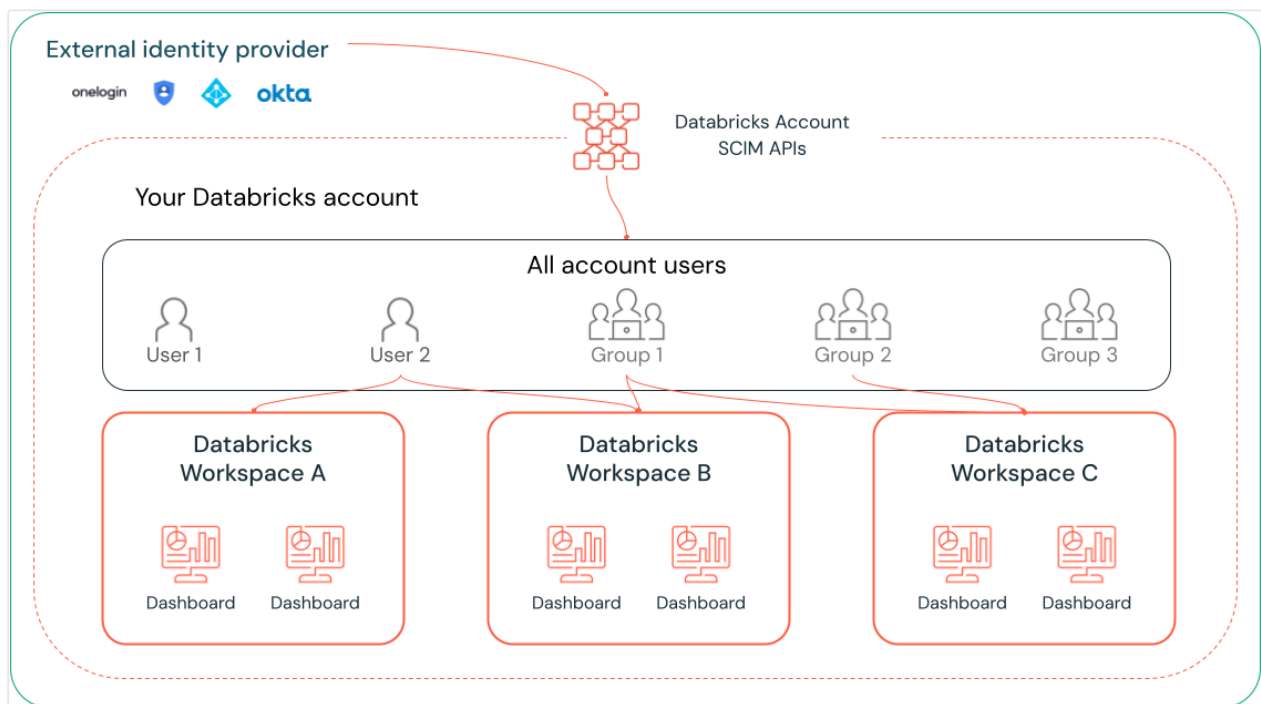

Databricks recommends that account admins use account-level SCIM provisioning to sync all users and groups automatically from your identity provider to your Databricks account. You can also manually register these users and groups as you set up identities in your Databricks account. This approach allows them to be included as eligible recipients before an author attempts to share a dashboard. See [Enable all identity provider users to access Databricks](#).

No additional configuration is required beyond account registration. Users do not need to be assigned to a workspace or given access to compute resources.

Manage dashboard embedding

Users can securely embed dashboards in external websites and applications. Each embedding option requires a workspace admin to configure settings and permissions. To learn how to manage embedding settings, see [Manage dashboard and Genie Space embedding](#).

Workspace admin subscription controls

Workspace admins can prevent users from distributing dashboards using subscriptions. Changing this setting prevents all users from adding email subscribers to scheduled dashboards. Dashboard editors cannot add subscribers, and dashboard viewers do not have the option to subscribe to a scheduled dashboard.

To prevent sharing email updates:

1. Click your username in the top bar of the Databricks workspace and select **Settings**.
2. In the **Settings** sidebar, click **Notifications**.
3. Turn the **Enable dashboard email subscriptions** option off.

If this setting is off, existing subscriptions are paused, and no one can modify existing subscription lists. If this setting is turned back on, subscriptions resume using the existing list.

Configure Slack or Microsoft Teams notifications

Dashboard editors can add Slack and Microsoft Teams channels as subscribers to a schedule. Before users can subscribe Slack or Microsoft Teams channels to dashboard

schedules, configure Slack or Microsoft Teams notification destinations as a workspace admin.

Slack and Teams subscriptions deliver dashboard snapshots that include:

- A PNG image snapshot of the dashboard visible directly in the channel
- A direct link to open the dashboard in Databricks
- A PDF snapshot attachment in the message thread

For step-by-step instructions on creating an app, configuring OAuth permissions, and setting up notification destinations for dashboard subscriptions, see [Configure Slack notifications](#) for Slack destinations, and [Configure Microsoft Teams notifications](#) for Microsoft Teams destinations.

Download controls

Workspace admins can adjust their security settings to prevent users from downloading dashboard and Genie Space results using the following steps:


1. Click your username in the top bar of the Databricks workspace and select **Settings**.
2. In the **Settings** sidebar, click **Security**.
3. Turn the **SQL results download** option off.

Transfer ownership of a dashboard

Workspace admins can transfer ownership of a dashboard to a different user or service principal.

1. Go to the list of dashboards. Click a dashboard name to edit it.
2. Click **Share**.

3. Click the  icon at the top-right of the **Sharing** dialog.

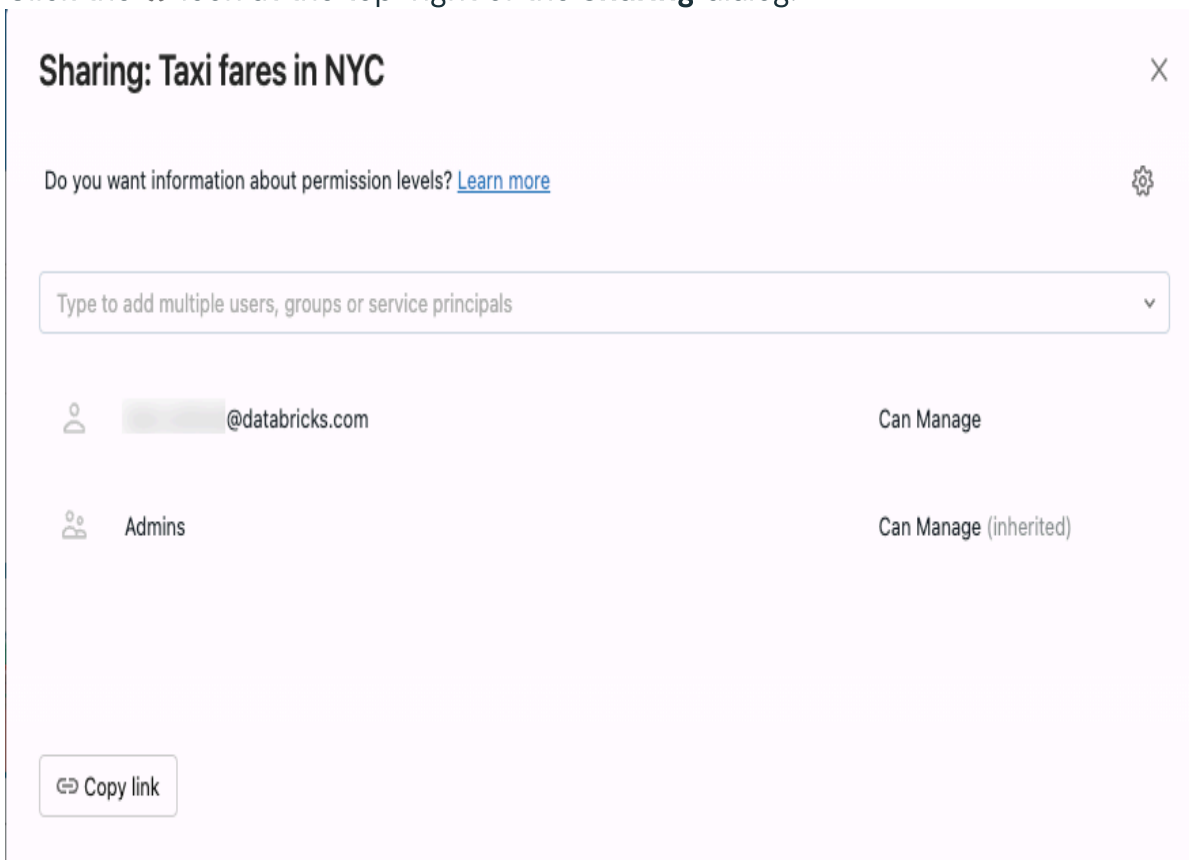

4. Start typing a name to search for and select the new owner. You can select a user or a service principal.

5. Click **Confirm**.

The new owner appears in the **Sharing** dialog with CAN MANAGE permissions. To view dashboards listed by owner, go to the list of available dashboards by clicking  **Dashboards**.

Monitor AI/BI activity

WARNING

Due to an outage, some dashboard audit logs might be missing for the period October 16, 2025 – November 19, 2025.

Admins can monitor the activity on dashboards and Genie Spaces using audit logs. See [AI/BI dashboard events](#) and [Genie Space events](#). For code examples that demonstrate how to access audit log information to answer common questions, see [Monitor Genie Spaces usage with audit logs and alerts](#).  Ask Genie

Is this page

as this page helpful?

☐ Yes	☐ No
Send feedback	

Last updated on **Feb 23, 2026**

Manage AI/BI dashhoard workspace themes

This page explains how to create, update, and delete workspace themes for AI/BI dashboards to maintain consistent branding across your organization. For information about applying workspace themes to dashboards, see [Apply a workspace theme](#).

Workspace theme overview

As a workspace admin, you can define a default theme for AI/BI dashboards in your workspace. When you configure a workspace theme, all new dashboards automatically inherit these settings, while existing dashboards opt in through the theme settings.

A workspace theme includes:

- Canvas background colors (light and dark mode variants)
- Visualization color palette for charts and graphs
- Font styles and sizes
- Widget title alignment preferences

The workspace theme serves as the default for new dashboards, but it is not required. Dashboard authors can select other preset themes, create custom themes, or edit the workspace theme, which converts it to a custom theme for that specific dashboard.

Requirements

To manage the workspace theme, you must be a workspace admin.

Create or update the workspace theme

To create or update the workspace theme:

1. In the [admin settings](#), select **Appearance > AI/BI > Theme**.
 - If no theme exists, the button appears as **Not configured**.
 - If a theme exists, the button appears as **Configured**.
2. Click the button to open the full-page theme editor.
3. Customize the theme settings:
 - **Canvas colors**: Select background colors for the dashboard canvas in light and dark modes.
 - **Visualization palette**: Choose or customize colors for charts and visualizations. Add or remove colors using **+** the plus icon or **—** the dash icon.
 - **Fonts**: Set font styles and sizes for text elements.
 - **Title alignment**: Choose left, center, or right alignment for widget titles.
4. Preview your changes using the preview pane, which includes:
 - Dashboard background in the selected canvas color
 - Multi-series line chart widget
 - Stacked bar chart widget
5. Preview the theme in light and dark modes by clicking **Light mode** or **Dark mode** under the **Theme** section.
6. Click **Save** to apply the workspace theme.

After you save the theme, all new dashboards automatically inherit these settings.

Delete the workspace theme

When you delete the workspace theme, new dashboards default to the Databricks theme. Existing dashboards that use the workspace theme aren't affected, and they retain the theme as a custom theme.

To delete the workspace theme:

1. In the [admin settings](#), select **Appearance > AI/BI > Theme**.
2. Click **Configured** to open the theme editor.
3. Click **Delete** or the delete option in the editor.
4. In the confirmation dialog, click **Remove** to confirm deletion.

Theme lifecycle and dashboard impact

Understanding how workspace theme changes affect existing dashboards helps you manage theme updates without disrupting published content.

New dashboards

All new dashboards automatically inherit the workspace theme if one is configured. If no workspace theme exists, new dashboards use the default Databricks theme.

Existing dashboards

Existing dashboards can opt in to the workspace theme through the [theme settings](#). When a dashboard author applies the workspace theme, the dashboard receives a snapshot of the current theme configuration.

Theme updates

When you update the workspace theme, existing dashboards that previously applied the workspace theme aren't automatically updated. Instead, they retain the version of

the theme they had when it was last applied. This prevents unexpected visual changes to published dashboards.

Dashboard authors manually reapply the updated workspace theme to adopt the new settings.

Theme deletion

When you delete the workspace theme, existing dashboards that use it aren't affected. They automatically retain the theme as a custom theme to ensure published dashboards maintain their appearance.

Manage themes using the Settings API

Manage workspace themes programmatically using the Settings API. The API supports retrieving, updating, and deleting workspace themes.

For more information, see the [Settings API reference](#).

What's next

- [Apply a workspace theme](#)

Is this page

as this page helpful?

☐ Yes

☐ No

Last updated on **Apr 27, 2026**

Manage dashboard and Genie Space embedding

This page shows how workspace admins can manage embedding options for AI/BI dashboards and Genie Spaces.

What types of embedding can you do?

You can securely embed dashboards and Genie Spaces in external websites and applications.

Dashboard embedding

You can embed dashboards in the following ways:

- **Databricks–basic embedding:** Dashboard authors can generate iframe embed code using the **Share** dialog. Workspace admins can manage which domains, if any, are approved for hosting an embedded dashboard. Dashboard embedding requires users to have third-party cookies enabled. Workspace admins must enable embedding in the workspace and define the list of eligible domains. See [Basic dashboard embedding](#).
- **Embedding for external users:** (Public Preview) You can configure an external application to authenticate to Databricks with a service principal and access a dashboard. Users who are able to access your external application can access the dashboard. Optionally, you can filter the data presented in the dashboard based on the user who is accessing it. Workspace admins must configure the external application to use the service principal and OAuth tokens required for authentication. See [What is embedding for external users?](#).

To learn more about available dashboard embedding options, see [Embed a dashboard](#).

Genie Space embedding

ⓘ BETA

This feature is in [Beta](#). Workspace admins can control access to this feature from the **Previews** page. See [Manage Databricks previews](#).

- **Genie Space iframe embedding:** Genie Space authors can generate iframe embed code from the **Share** dialog. Users who have access to the embedding application can send prompts and view results without editing the space configuration. Workspace admins must define the allowed surfaces for embedding before authors can share a Genie Space this way. See [Embed a Genie Space](#) and [Control allowed embed destinations](#).

Control allowed embed destinations

Embedding a dashboard or Genie Space requires that the external website be explicitly allowed. To add allowed embed destinations to your workspace:

Settings  Workspace admin Appearance Usage	External access Embed dashboards Set up access controls for domains where published dashboards can be embedded. Manage Allow approved domains ▾
---	--

1. Click your username in the top bar of the Databricks workspace and select **Settings**.
2. Click **Security**.
3. Scroll down to the **External access** section.
4. In the **Embed dashboards** section, use the drop-down menu to set the embedding policy for your workspace. This setting applies to both dashboards and Genie Spaces.

There are three policy options:

- **Allow:** Dashboards and Genie Spaces can be embedded in any domain.
- **Allow approved domains:** Dashboards and Genie Spaces can only be embedded in sites that match the approved list.
- **Deny:** Dashboards and Genie Spaces cannot be embedded in any domain.

If you select **Allow approved domains**, use the following instructions to manage your list of approved domains:

1. Click **Manage** next to **Embed Dashboards**.
2. Type a domain in the **Approved domain** dialog's text field. Click **Add domain** after each entry.
3. Click **Save**.

NOTE

To embed your dashboard or Genie Space in a Google Site, you must allow multiple domains owned and used by Google in addition to the address associated with your particular site. The required sites are:

- `sites.google.com`
- `www.gstatic.com`
- `*.googleusercontent.com`

Tips for defining approved domains and routes

To specify allowed hosts, use the grammar defined in [W3C's Content Security Policy documentation](#). The examples in this section illustrate some common patterns.

Allow subdomains

To allow all subdomains for a given domain, use a wildcard symbol (*) before the domain name. The following examples use `*.databricks.com` as a sample domain.

- **Matches:** Any subdomain
 - `some.databricks.com`

- `app.databricks.com`
- `anything.databricks.com`
- **Does not match:** Anything that has a different domain.
 - `another-databricks.com`
 - `app-databricks.com`

Next steps

- **Set up basic embedding:** Configure embedding for users with Databricks accounts who can sign in directly to view dashboards. See [Basic dashboard embedding](#).
- **Configure embedding for external users:** Set up embedding for external users to allow users without Databricks accounts to access dashboards through service principal authentication. See [What is embedding for external users?](#).
- **Embed a Genie Space:** Learn how space authors can generate iframe embed code and add it to an external application. See [Embed a Genie Space](#).
- **Create and publish dashboards:** Learn how to create, configure, and publish AI/BI dashboards for embedding. See [Dashboards](#).
- **Manage workspace security settings:** Configure additional security settings and access controls for your workspace. See [Manage your workspace](#).

Is this page

as this page helpful?

☐ Yes

☐ No

☐ Send feedback


Last updated on **Feb 23, 2026**

Configure Slack notifications

AI/BI dashboards support sending scheduled snapshots to Slack channels. This allows teams to receive dashboard updates directly in their Slack workspace. This page explains how to create a Slack app and configure a Slack channel as a notification destination. Dashboard editors can then add this notification destination as a subscriber to scheduled dashboards. For information about adding a Slack channel as a subscriber, see [Subscribe a Slack or Microsoft Teams channel](#).

Slack subscriptions deliver dashboard snapshots that include:

- A PNG image snapshot of the dashboard visible directly in the channel
- A direct link to open the dashboard in Databricks
- A PDF snapshot attachment in the message thread

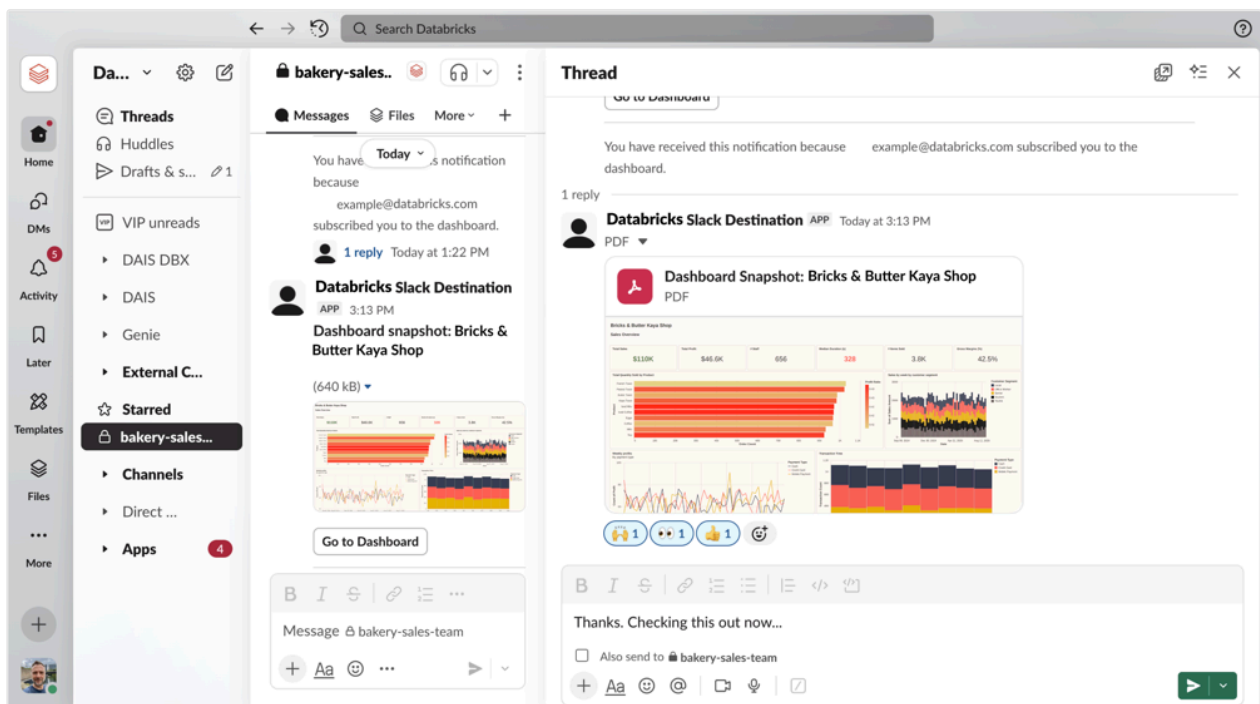

Requirements

You must have the following permissions:

- You must be a Databricks workspace admin to configure notification destinations.
- You must have the appropriate permissions to create and install apps in your Slack workspace.

During the setup process, you collect authentication credentials from Slack to configure the Databricks notification destination.

After you configure the notification destination, any user with CAN EDIT permissions on a dashboard can add the Slack destination as a subscriber to schedules they manage.

Step 1: Create and configure a Slack app

Create a Slack app for your workspace and configure the necessary permissions.

Create the Slack app

1. Go to [Your apps](#) in the Slack API documentation. You may be prompted to sign in to your Slack workspace.
2. Click **Create an app**.
3. Click **From a manifest** or **From scratch**, depending on whether you have a manifest file to add your app's basic information, or if you want to create it using Slack's configuration UI. See Slack's documentation about [Configuring apps with app manifests](#) for instructions about creating from a manifest.

After you create the app, the Slack app settings page opens automatically.

Add required OAuth scopes

1. In the sidebar, under **Features**, click **OAuth and Permissions**.
2. Scroll down to **Scopes**.
3. Under **Bot Token Scopes**, click **Add an OAuth Scope**.
4. Add the following scopes:


- incoming-webhook
- files:write
- files:read
- chat:write

Install the app in your workspace

1. In the Slack app settings sidebar, under **Settings**, click **Install App**.
2. Click **Install** or **Request to Install**.
3. Select a destination channel in your workspace.
4. Click **Allow** to complete the installation.

Verify the app has been added to your destination channel

1. In your Slack workspace, open the destination channel. Click the channel name near the top of the window.
2. Click the **Integrations** tab.

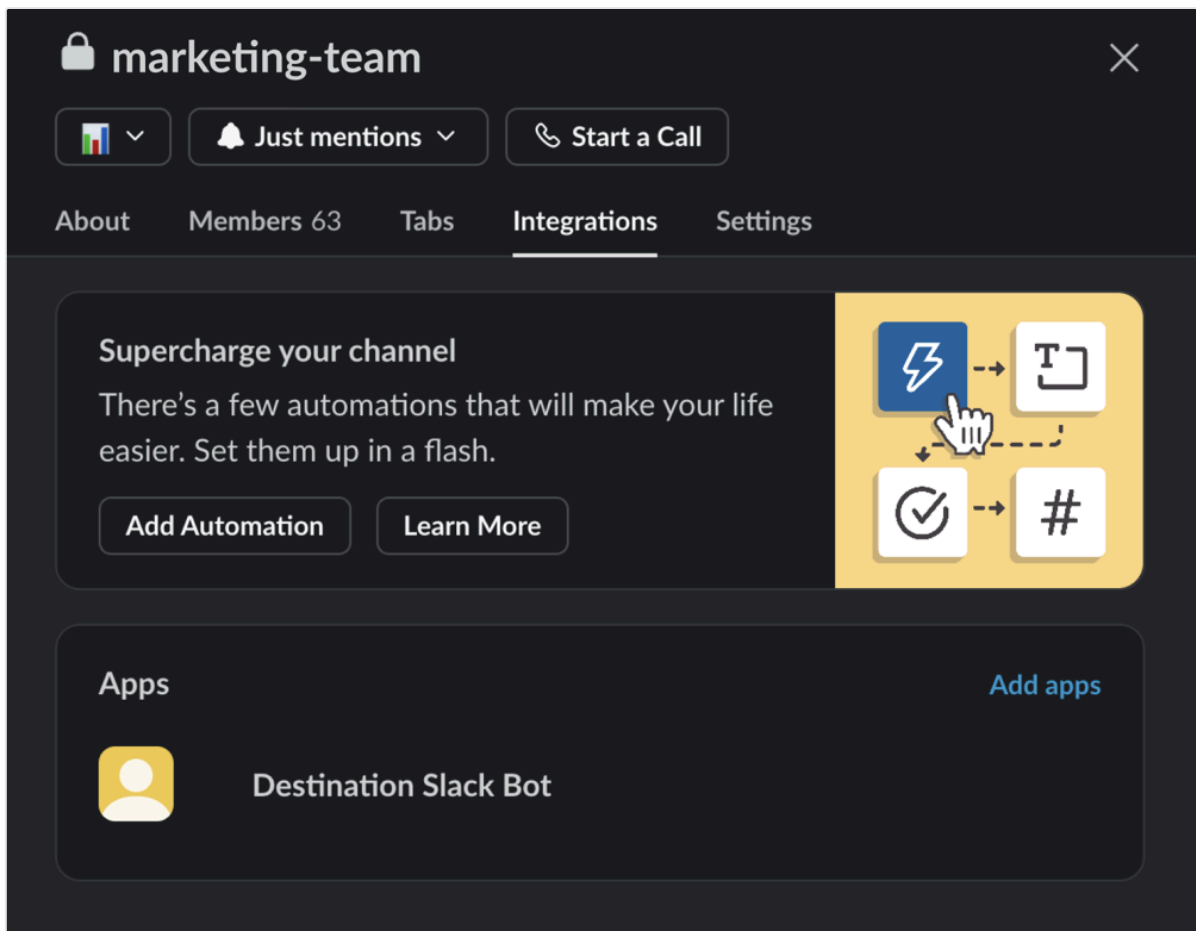

3. Under **Apps**, confirm that you see the bot you just created. If you don't see it, click **Add apps** and add it.

Retrieve authentication credentials

You need the following information from the Slack app to configure the Databricks notification destination:

1. **Bot User OAuth Token:**

- Navigate to **OAuth & Permissions** in the Slack app settings.
- Copy the **Bot User OAuth Token**.

2. **Webhook URL:**

- Navigate to **Incoming Webhooks** in the Slack app settings.
- Copy the **Webhook URL** for your destination channel.

Get the Slack channel ID

1. In your Slack workspace, navigate to the destination channel.

2. Click the channel name to open channel details.
3. Copy the **Channel ID** from the channel details.

Step 2: Configure the notification destination in Databricks

Create a notification destination in your Databricks workspace that points to your Slack channel.

1. Log in to your Databricks workspace.
2. Click your username in the upper right corner of the workspace.
3. Select **Settings** from the dropdown.
4. In the **Workspace admin** section, click the **Notifications** tab.
5. Click **Manage** in the **Notification destinations** section.
6. Click **Add destination**.
7. Select **Slack** from the destination type dropdown.
8. Enter the following information:
 - **Destination name:** A descriptive name for this Slack destination
 - **Slack Webhook URL:** The webhook URL from your Slack app
 - **OAuth Token:** The Bot User OAuth Token from your Slack app
 - **Slack Channel ID:** The channel ID from your Slack workspace
9. Click **Create**.

Users can now add this Slack notification destination as a subscriber to dashboard schedules.

For instructions on subscribing Slack channels to dashboard schedules, see [Subscribe a Slack or Microsoft Teams channel](#).

Troubleshooting

Use the following to troubleshoot common errors with Slack notifications.

Missing PDF attachment

If the Slack notification appears without a PDF attachment, verify that:

- The OAuth token is correctly configured in the notification destination
- The channel ID matches the destination channel
- The Slack app has the required `files:write` scope

Notification not appearing

If notifications do not appear in your Slack channel:

- Verify the webhook URL is correct and matches the destination channel
- Check that the Slack app is installed in the workspace
- Ensure the bot has been added to the destination channel
- Confirm the schedule is active and not paused

Next steps

- Subscribe Slack channels to dashboard schedules. See [Subscribe a Slack or Microsoft Teams channel](#)
- Configure email notification destinations. See [Manage notification destinations](#)

Is this page

as this page helpful?

☐ Yes

☐ No

☐ Send feedback

Last updated on **Feb 23, 2026**

Configure Microsoft Teams notifications


ⓘ PREVIEW

This feature is in [Public Preview](#).

AI/BI dashboards support sending scheduled snapshots to Microsoft Teams channels. This allows teams to receive dashboard updates directly in their Teams workspace. This page explains how to create a Microsoft Teams app and configure a Teams channel as a notification destination. Dashboard editors can then add this notification destination as a subscriber to scheduled dashboards. For information about adding a Teams channel as a subscriber, see [Subscribe a Slack or Microsoft Teams channel](#).

Teams subscriptions deliver dashboard snapshots that include:

- A PNG image snapshot of the dashboard visible directly in the channel
- A direct link to open the dashboard in Databricks
- A PDF snapshot attachment in the message thread

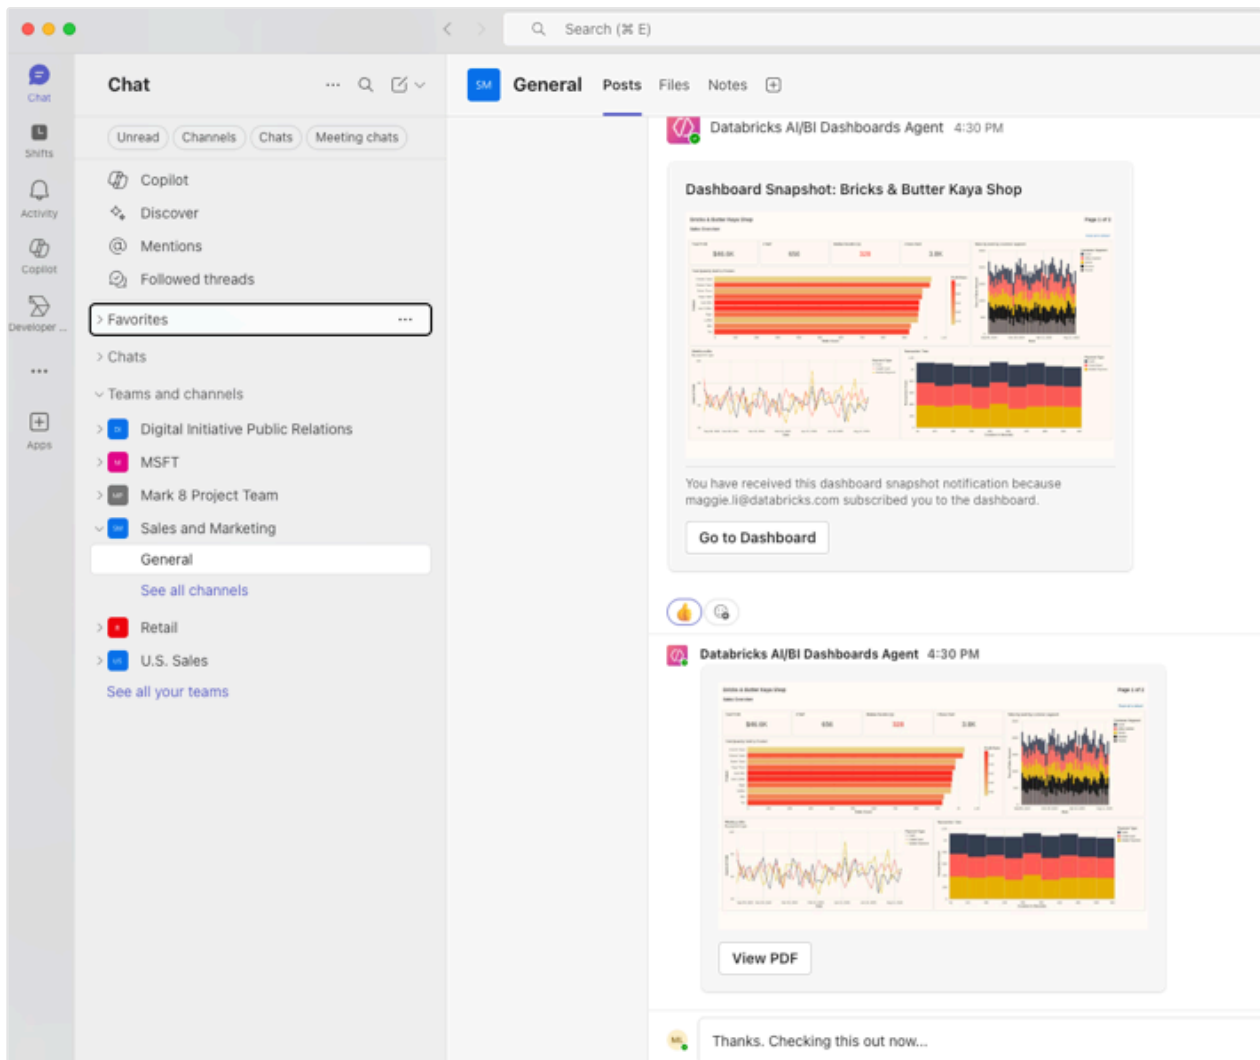

Requirements

You must have the following permissions:

- You must be a Databricks workspace admin to configure notification destinations.
- You must have the appropriate permissions to create and configure apps in Microsoft Copilot Studio and Microsoft Entra ID.

During the setup process, you collect authentication credentials from Microsoft to configure the Databricks notification destination.

After you configure the notification destination, any user with CAN EDIT permissions on a dashboard can add the Teams destination as a subscriber to schedules they manage.

Step 1: Create and configure a Microsoft Teams app

Create a Microsoft Copilot Studio bot for your Teams workspace and configure the necessary permissions.

Create the Microsoft Copilot Studio bot

Complete the following steps from the Microsoft Copilot Studio documentation:

1. [Install the Copilot Studio app in Microsoft Teams.](#)
2. [Create a new chatbot in a team.](#)

Configure app permissions in Microsoft Entra ID

1. Go to the [Microsoft Entra admin center](#).
2. Click **Applications > App registrations**.
3. Find and select the app registration associated with your Copilot Studio bot using the Application ID from the previous step.
4. In the left sidebar, click **API permissions**.
5. Click **Add a permission**.
6. In **Microsoft APIs**, click **Microsoft Graph > Application permissions**.
7. Add the following permissions:
 - `Files.Read.All`
 - `Sites.ReadWrite.All`
8. Click **Add permissions**.
9. Click **Grant admin consent** to grant the permissions for your organization.

Create an authentication secret

1. In the Microsoft Entra admin center, with your app registration selected, click to **Certificates & secrets**.
2. Click **Client secrets > New client secret**.

3. Enter a description and select an expiration period.
4. Click **Add**.
5. Copy the **Value** of the newly created secret. This value is displayed only once and you need it to configure the Databricks notification destination.

Get the tenant ID

1. In the Microsoft Entra admin center, with your app registration selected, navigate to **Overview**.
2. Copy the **Directory (tenant) ID**. You need this value to configure the Databricks notification destination.


Publish the bot and add to Teams channel

Complete the following steps from the Microsoft Copilot Studio documentation:

1. [Publish your Chatbot](#).
2. [Make your chatbot available to other employees](#).

Create an incoming webhook for the channel

1. In Microsoft Copilot Studio documentation, follow the steps to [Create an Incoming Webhook](#).
2. Copy and save the generated webhook URL.
3. Click **Done**.

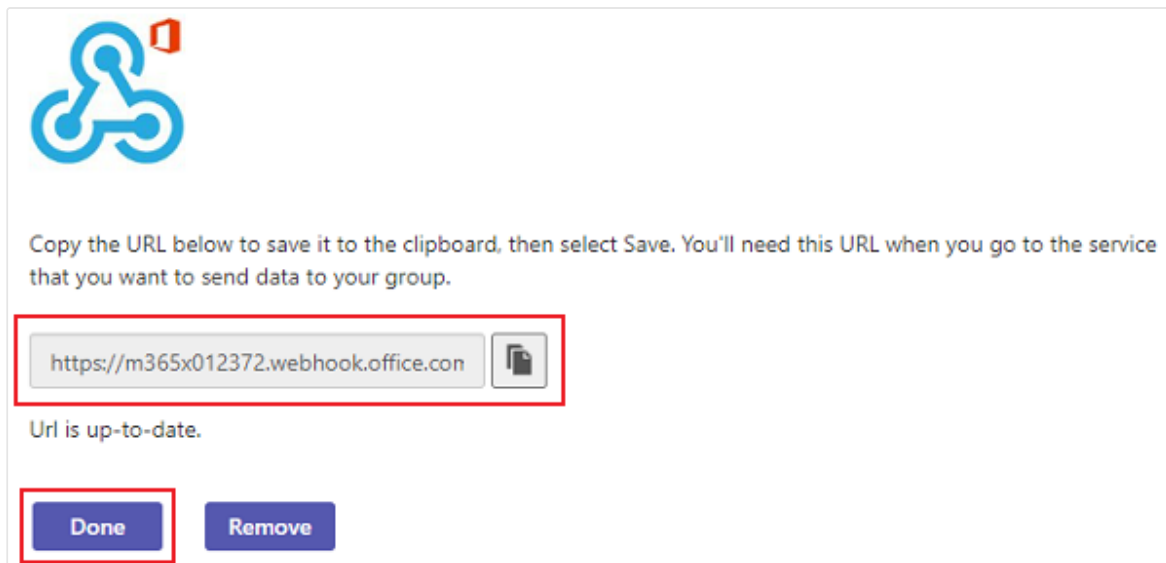



Copy the URL below to save it to the clipboard, then select Save. You'll need this URL when you go to the service that you want to send data to your group.

`https://m365x012372.webhook.office.com` 

Url is up-to-date.

Done **Remove**

Get the Teams channel URL

1. In Microsoft Teams, navigate to the destination channel.
2. Click the hamburger menu **...** next to the channel name.
3. Click **Copy link**. Ensure to copy the channel URL and not the Teams URL. You need this URL to configure the Databricks notification destination.

Step 2: Configure the notification destination in Databricks

Create a notification destination in your Databricks workspace that points to your Microsoft Teams channel.

1. Log in to your Databricks workspace.
2. Click your username in the upper right corner of the workspace.
3. Select **Settings** from the dropdown.
4. In the **Workspace admin** section, click the **Notifications** tab.
5. Click **Manage** in the **Notification destinations** section.
6. Click **Add destination**.

7. Select **Microsoft Teams** from the destination type dropdown.

8. Enter the following information:

- **Name:** A descriptive name for this Teams channel destination
- **Microsoft teams Webhook URL:** The webhook URL from the Teams incoming webhook
- **App ID:** The Application ID from your Microsoft Copilot Studio bot
- **Auth Secret:** The client secret value from Microsoft Entra ID
- **Channel URL:** The channel URL from Microsoft Teams
- **Tenant ID:** The Directory (tenant) ID from Microsoft Entra ID

9. Click **Create**.

Create a new destination

Type

Microsoft Teams

To improve security when interacting with external endpoints, Databricks recommends generating a new URL for each configured destination. [Learn more](#)

Name

Dashboard updates

Microsoft Teams Webhook URL

Dashboard Subscriptions

All fields below are required for dashboard subscriptions.

App ID (optional)

Auth Secret (optional)

Channel URL (optional)

Tenant ID (optional)

Users can now add this Teams notification destination as a subscriber to dashboard schedules.

For instructions on subscribing Teams channels to dashboard schedules, see

[Subscribe a Slack or Microsoft Teams channel.](#)

 Ask Genie

Troubleshooting

Use the following to troubleshoot common errors with Microsoft Teams notifications.

Missing PDF attachment

If the Teams notification appears without a PDF attachment, verify that:

- The Application ID is correctly configured in the notification destination
- The auth secret is valid and has not expired
- The app has been granted the required `Files.Read.All` and `Sites.ReadWrite.All` permissions in Microsoft Entra ID
- Admin consent has been granted for the API permissions

Notification not appearing

If notifications do not appear in your Teams channel:

- Verify the webhook URL is correct and matches the destination channel
- Verify the auth secret uses the client secret value from Microsoft Entra ID and not the secret ID
- Check that the bot has been published and added to the destination channel
- Ensure the channel URL is correct
- Verify the tenant ID matches your Microsoft organization
- Confirm the schedule is active and not paused

Next steps

- Subscribe Teams channels to dashboard schedules. See [Subscribe a Slack or Microsoft Teams channel](#)
- Configure Slack notification destinations. See [Configure Slack notifications](#)
- Configure email notification destinations. See [Manage notification destinations](#)

Is this page

as this page helpful?

☐ Yes	☐ No
Send feedback	

Last updated on **May 11, 2026**

Manage AI/BI assets using APIs

Use Databricks APIs to manage dashboards

Dashboards are data objects that you can manage using Databricks REST APIs. You can use the Workspace API to work with them as generic workspace objects or use Lakeview API tools designed explicitly for dashboard management.

The tutorials in this section are designed to help you manage dashboards throughout their lifecycle and move them across different workspaces.

Tutorial	Description
Use dashboard APIs to create and manage dashboards	Recommended for migrating dashboards. The Lakeview API is designed to work with dashboard objects. Certain functionality in the Lakeview API mirrors available tools in the Workspace API but includes additional functionality specifically for dashboard management. This tutorial contains examples demonstrating how to use Lakeview APIs to manage dashboards.
Manage dashboard permissions using the Workspace API	Manage dashboard permissions using the Workspace API.
Manage dashboards with Workspace APIs	If you're already using the Workspace API to manage workspace objects like notebooks, you can continue to use it for many dashboard management operations. Th

 Ask Genie

Tutorial	Description
	demonstrates how to use the Workspace and Lakeview APIs to manage dashboards.

Use the Genie Spaces API

The [Genie API](#) provides two types of capabilities:

- **Conversation APIs:** Enable natural language data querying in applications, chatbots, and AI agent frameworks. Users can ask questions, retrieve generated SQL and query results, and continue stateful conversations.
- **Management APIs:** Enable programmatic creation, configuration, and deployment of Genie Spaces across workspaces for use in CI/CD pipelines, version control, and automated space management.

For more information, see [Use the Genie Spaces API](#)

Is this page

as this page helpful?

☐ Yes

☐ No

☐ Send feedback