

Objective: Launch a Node.js application in a Docker container and connect it to My SQL Database using environment variables. AWS resources EC2 and RDS are provisioned and configured by ansible.


1. Ansible playbook log

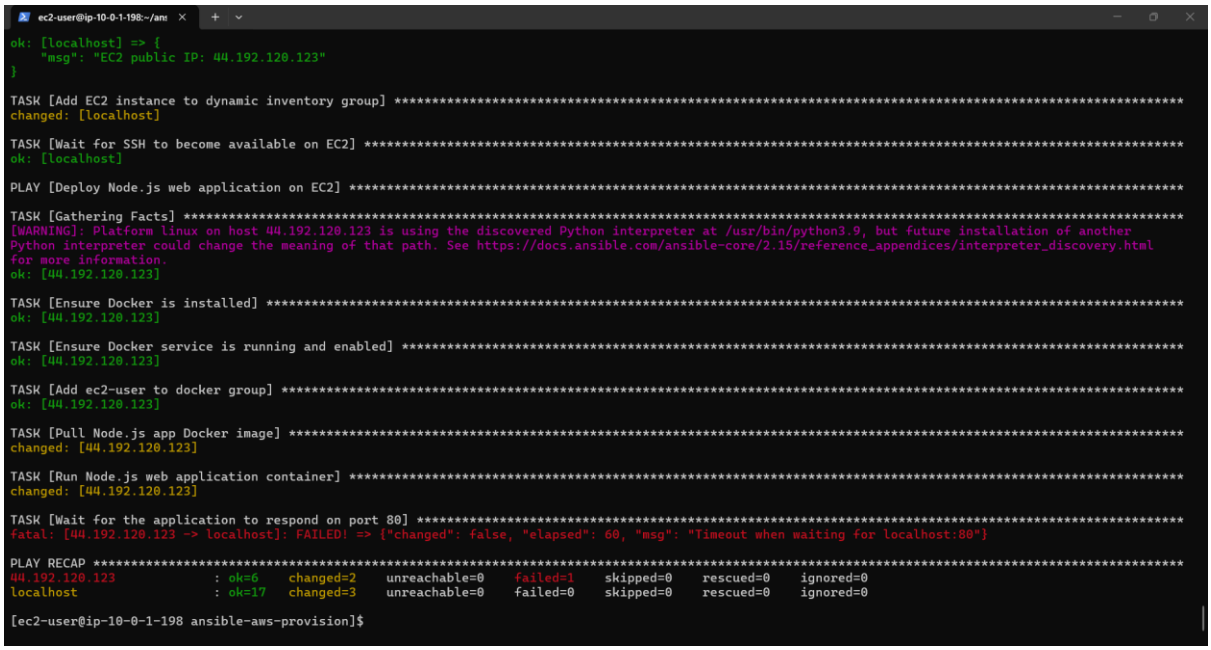

2. EC2 server

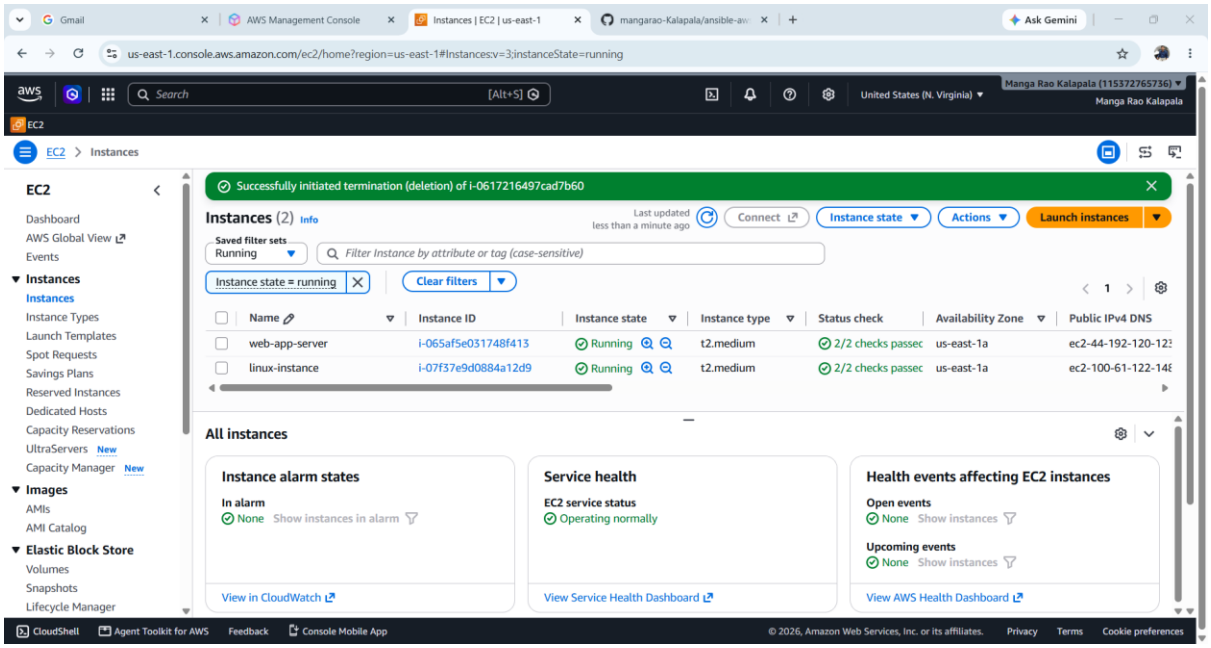

3. RDS database

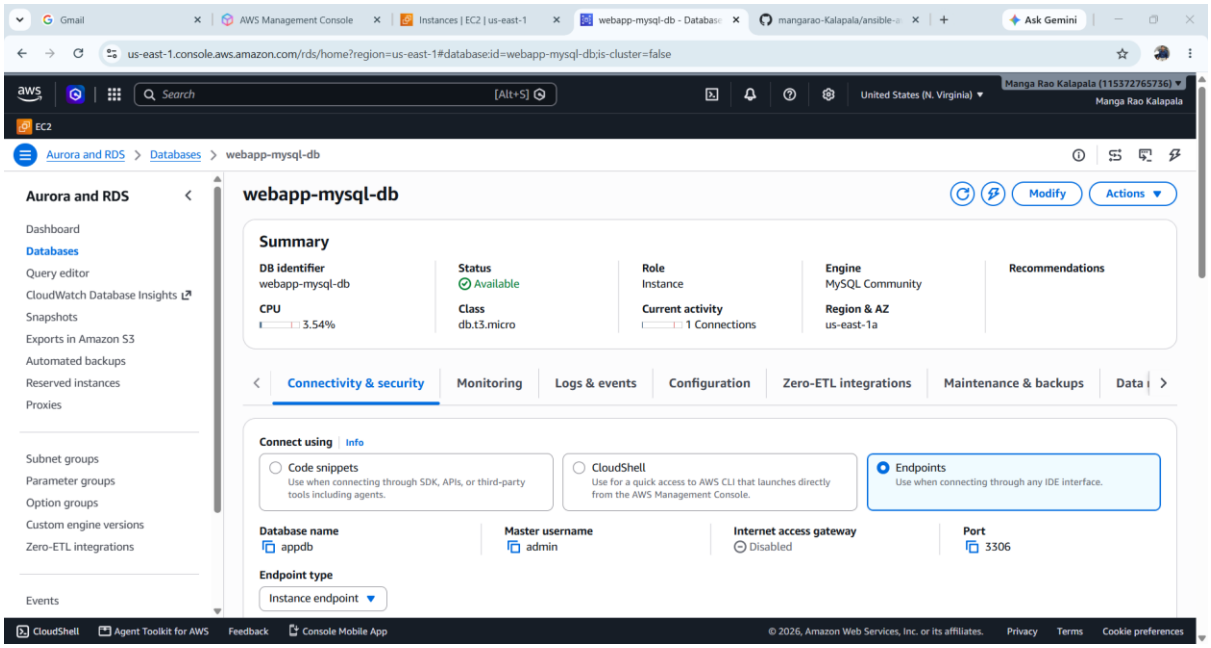


4. Docker logs:

```
  Version 2023.8.20250707:
  Version 2023.8.20250715:
  Version 2023.8.20250721:
  Version 2023.8.20250808:
  Version 2023.8.20250818:
  Version 2023.8.20250908:
  Version 2023.8.20250915:
  Version 2023.9.20250929:
  Version 2023.9.20251014:
  Version 2023.9.20251020:
  Version 2023.9.20251027:
  Version 2023.9.20251105:
  Version 2023.9.20251110:
  Version 2023.9.20251117:
  Version 2023.9.20251208:
Run "/usr/bin/dnf check-release-update" for full release and version update info
   ,     #_
   ~\_  ####_
  ~~  \_#####\
  ~~     \###|
  ~~       \#/ ___   Amazon Linux 2023 (ECS Optimized)
   ~~       V~' '->
    ~~~         /
      ~~._.   _/
         _/ _/
       _/m/'

For documentation, visit http://aws.amazon.com/documentation/ecs
Last login: Fri Oct  9 20:25:22 2026 from 49.43.223.75
[ec2-user@ip-10-0-1-112 ~]$ docker ps
CONTAINER ID   IMAGE                          COMMAND                  CREATED          STATUS          PORTS                    NAMES
ab6c77727d40   philippaul/node-mysql-app:02   "docker-entrypoint.s…"   48 minutes ago   Up 48 minutes   0.0.0.0:80->3000/tcp   node-mysql-app
[ec2-user@ip-10-0-1-112 ~]$ docker logs ab6c77727d40
Server is running on http://localhost:3000
Database "appdb" is ready.
Using database "appdb"
Table "contacts" is ready.
[ec2-user@ip-10-0-1-112 ~]$
```

5. Access web application from browser

http://<<NODE-IP>>

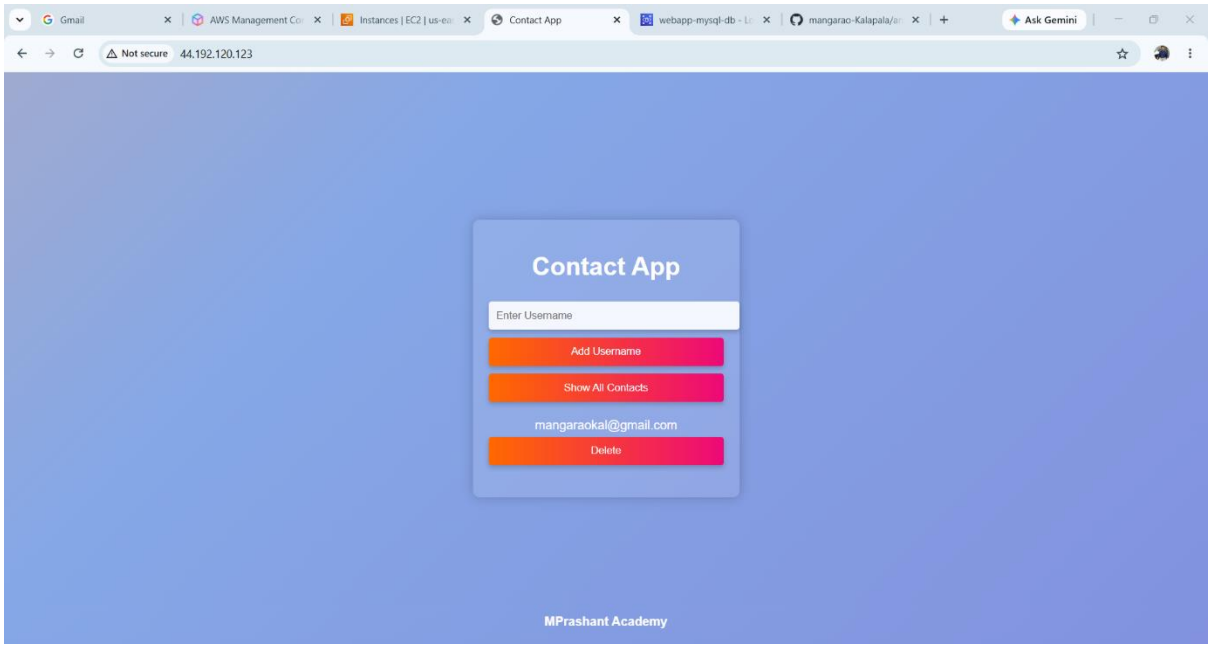

6. DB access through MySQL client:

