


Medicare: Healthcare Appointment System

(FASTAPI – Swagger UI)

POST method: localhost:8000/signup

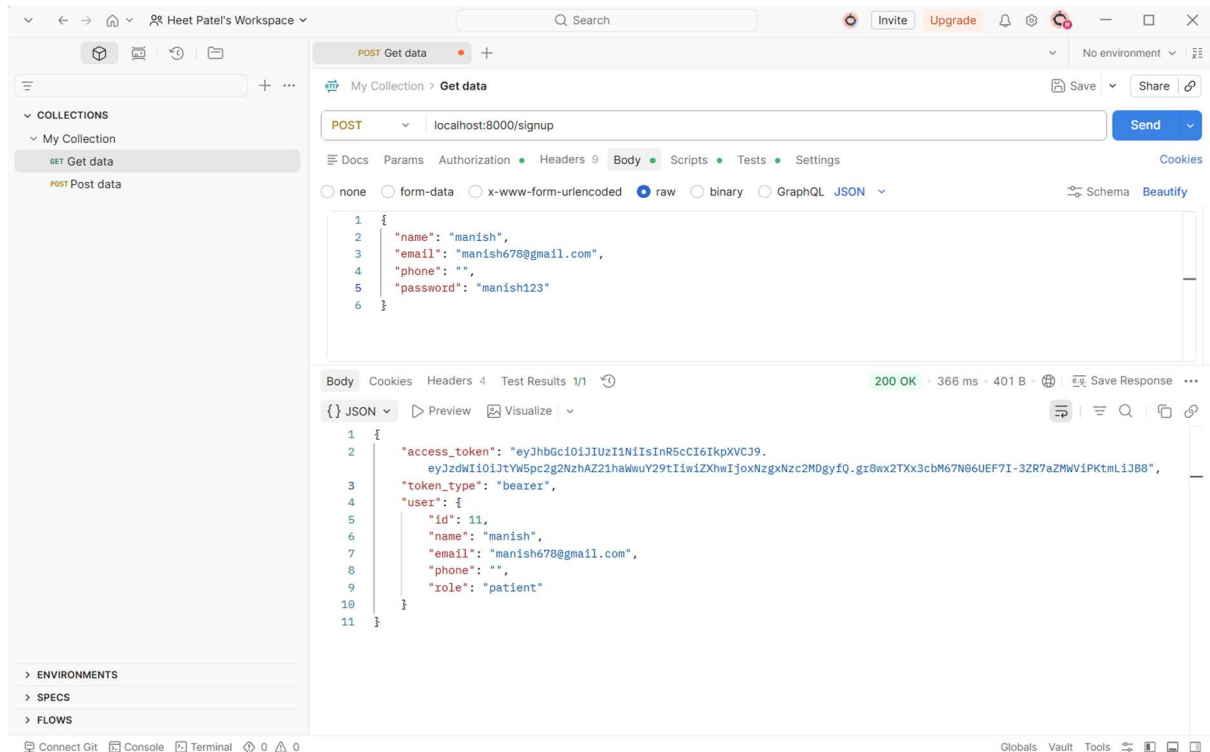


This screenshot shows the Swagger UI for the 'signup' endpoint. The left sidebar displays the 'My Collection' with 'GET Get data' and 'POST Post data'. The main area shows the 'POST' method for 'localhost:8000/signup'. The request body is a JSON object with fields: name, email, phone, and password. The response body is a JSON object with fields: access_token, token_type, user (containing id, name, email, phone, and role), and role. The status is 200 OK.

```
1 {
2   "name": "manish",
3   "email": "manish678@gmail.com",
4   "phone": "",
5   "password": "manish123"
6 }
```

```
1 {
2   "access_token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiJtYV5pc2g2NzhAZ21haWwuy29tIiwiaXNwIjoxNzgxNzc2MDgyfQ.gr8wx2TXx3cbM67N06UEF7I-3ZR7aZMwV1PKtmLjB8",
3   "token_type": "bearer",
4   "user": {
5     "id": 11,
6     "name": "manish",
7     "email": "manish678@gmail.com",
8     "phone": "",
9     "role": "patient"
10  }
11 }
```

POST Method: localhost:8000/login

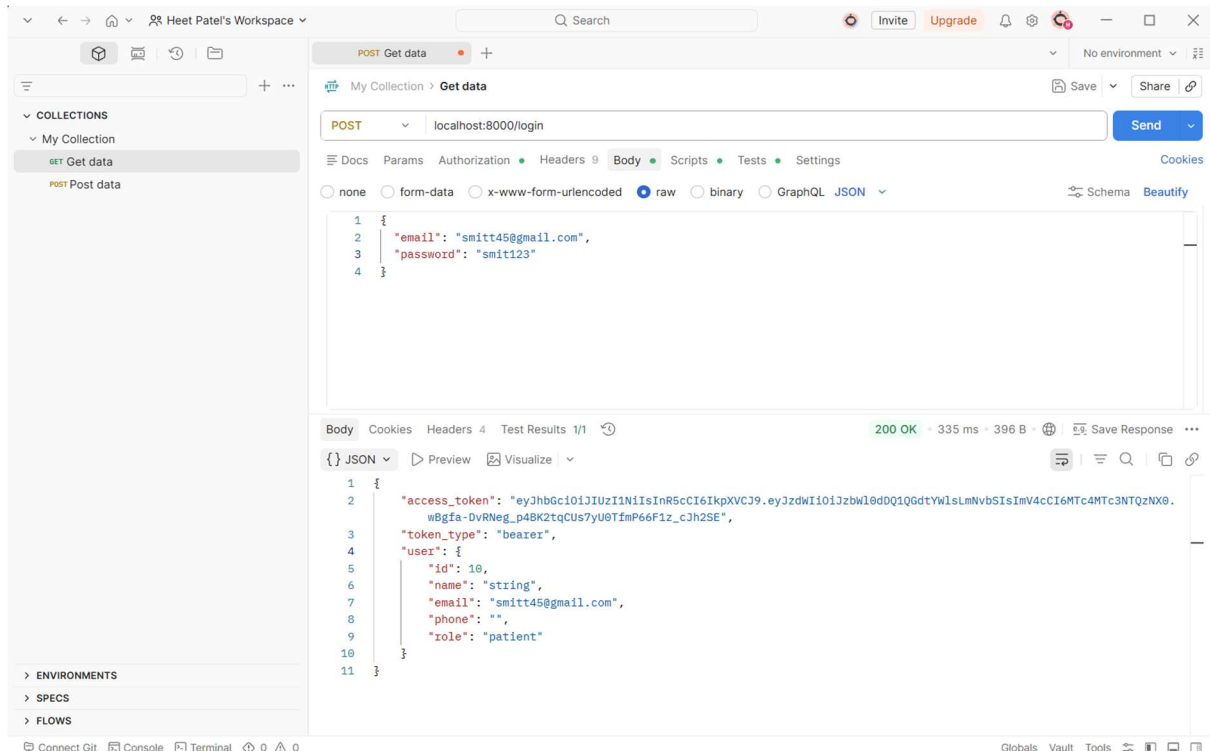

This screenshot shows the Swagger UI for the 'login' endpoint. The left sidebar displays the 'My Collection' with 'GET Get data' and 'POST Post data'. The main area shows the 'POST' method for 'localhost:8000/login'. The request body is a JSON object with fields: email and password. The response body is a JSON object with fields: access_token, token_type, user (containing id, name, email, phone, and role), and role. The status is 200 OK.

```
1 {
2   "email": "smitt45@gmail.com",
3   "password": "smit123"
4 }
```

```
1 {
2   "access_token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiJtYV5pc2g2NzhAZ21haWwuy29tIiwiaXNwIjoxNzgxNzc2MDgyfQ.gr8wx2TXx3cbM67N06UEF7I-3ZR7aZMwV1PKtmLjB8",
3   "token_type": "bearer",
4   "user": {
5     "id": 10,
6     "name": "string",
7     "email": "smitt45@gmail.com",
8     "phone": "",
9     "role": "patient"
10  }
11 }
```

GET Page: localhost:8000/

The screenshot shows the Postman interface with a GET request to `localhost:8000/`. The response is a 200 OK status with a response time of 9 ms and a body size of 194 B. The response body is displayed in JSON format:

```
1 {
2   "appointments": [],
3   "total": 0,
4   "confirmed": 0,
5   "pending": 0,
6   "cancelled": 0
7 }
```

GET Method: localhost:8000/doctors

The screenshot shows the Postman interface with a GET request to `localhost:8000/doctors`. The response is a 200 OK status with a response time of 9 ms and a body size of 1.05 KB. The response body is displayed in JSON format:

```
1 [
2   {
3     "id": 1,
4     "name": "Dr. Priya Sharma",
5     "specialization": "Cardiologist",
6     "experience": "12 years",
7     "available_days": "Mon, Wed, Fri",
8     "fee": "₹800",
9     "image_path": null
10  },
11  {
12    "id": 2,
13    "name": "Dr. Rohit Mehta",
14    "specialization": "Neurologist",
15    "experience": "8 years",
16    "available_days": "Tue, Thu, Sat",
17    "fee": "₹1000",
18    "image_path": null
19  },
20  {
21    "id": 3,
22    "name": "Dr. Anita Desai",
23    "specialization": "Dermatologist",
24    "experience": "10 years",
25    "available_days": "Mon, Tue, Thu",
26  }
27 ]
```

GET Method: localhost:8000/book/2

The screenshot shows the Postman interface with a GET request to `localhost:8000/book/2`. The request is in the "Send" state. The response is a 200 OK status with a response time of 11 ms and a body size of 280 B. The response body is displayed in JSON format.

```
{
  "id": 2,
  "name": "Dr. Rohit Mehta",
  "specialization": "Neurologist",
  "experience": "8 years",
  "available_days": "Tue, Thu, Sat",
  "fee": "₹1000",
  "image_path": null
}
```

POST Method: localhost:8000/book/2

The screenshot shows the Postman interface with a POST request to `localhost:8000/book/2`. The request is in the "Send" state. The response is a 201 Created status with a response time of 26 ms and a body size of 348 B. The response body is displayed in JSON format.

```
{
  "id": 1,
  "patient_id": 10,
  "doctor_id": 2,
  "patient_name": "smit ",
  "doctor_name": "Dr. Rohit Mehta",
  "specialization": "Neurologist",
  "date": "20/06/2026",
  "time": "10:00am",
  "reason": "asdfgh",
  "status": "Pending",
  "doctor_note": null
}
```

PUT Method: localhost:8000/profile

The screenshot shows the Postman interface for a PUT request to `localhost:8000/profile`. The request is configured with the following body:

```
1 {
2   "name": "string",
3   "phone": ""
4 }
```

The response is a 200 OK status with a response time of 27 ms and a body size of 206 B. The response body is a JSON object:

```
1 {
2   "id": 10,
3   "name": "string",
4   "email": "smitt45@gmail.com",
5   "phone": "",
6   "role": "patient"
7 }
```

POST Method: localhost:8000/logout

The screenshot shows the Postman interface for a POST request to `localhost:8000/logout`. The request is configured with the following body:

```
1 {
2   "email": "smitt45@gmail.com",
3   "password": "smitt123"
4 }
5
```

The response is a 200 OK status with a response time of 5 ms and a body size of 188 B. The response body is a JSON object:

```
1 {
2   "message": "Logged out. Discard the access token client-side."
3 }
```

POST Method: localhost:8000/login

The screenshot shows the Postman interface for a POST request to `localhost:8000/login`. The request body is a JSON object with email and password. The response is a 200 OK status with a JSON body containing an access token, token type, and user details.

```
POST localhost:8000/login
```

```
{  "email": "rohit@medicare.com",  "password": "doctor123"}
```

Response (200 OK):

```
{  "access_token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiJyb2hpdEBtZWZyZS5jb20iLCJleHAiOiE3MD0E3WzU2NTZ9.SzwDYChpJD_Yyw-14cd84rmEDMWL6fJw4z67wYlCqY",  "token_type": "bearer",  "user": {    "id": 2,    "name": "Dr. Rohit Mehta",    "email": "rohit@medicare.com",    "phone": null,    "role": "doctor"  }}
```

GET Method: localhost:8000/doctor/dashboard

The screenshot shows the Postman interface for a GET request to `localhost:8000/doctor/dashboard`. The response is a 200 OK status with a JSON body containing doctor details and a list of appointments.

```
GET localhost:8000/doctor/dashboard
```

Response (200 OK):

```
{  "doctor": {    "id": 2,    "name": "Dr. Rohit Mehta",    "specialization": "Neurologist",    "experience": "8 years",    "available_days": "Tue, Thu, Sat",    "fee": "₹1000",    "image_path": null  },  "appointments": [    {      "id": 1,      "patient_id": 10,      "doctor_id": 2,      "patient_name": "smit ",      "doctor_name": "Dr. Rohit Mehta",      "specialization": "Neurologist",      "date": "20/06/2026",      "time": "10:00am",      "reason": "asdfgh",      "status": "Pending",      "doctor_note": null    }  ]}
```

GET Method: localhost:8000/appointment/1

The screenshot shows the Postman interface with a GET request to `localhost:8000/appointment/1`. The request is successful, returning a 200 OK status with a response time of 16 ms and a body size of 343 B. The response body is a JSON object containing appointment details.

```
{
  "id": 1,
  "patient_id": 10,
  "doctor_id": 2,
  "patient_name": "smit ",
  "doctor_name": "Dr. Rohit Mehta",
  "specialization": "Neurologist",
  "date": "20/06/2026",
  "time": "10:00am",
  "reason": "asdfgh",
  "status": "Pending",
  "doctor_note": null
}
```

POST Method: localhost:8000/approve/1

The screenshot shows the Postman interface with a POST request to `localhost:8000/approve/1`. The request is successful, returning a 200 OK status with a response time of 22 ms and a body size of 349 B. The request body is a JSON object with a `doctor_note` field. The response body is a JSON object containing appointment details, with the `status` field updated to "Confirmed".

```
{
  "id": 1,
  "patient_id": 10,
  "doctor_id": 2,
  "patient_name": "smit ",
  "doctor_name": "Dr. Rohit Mehta",
  "specialization": "Neurologist",
  "date": "20/06/2026",
  "time": "10:00am",
  "reason": "asdfgh",
  "status": "Confirmed",
  "doctor_note": "sdfghj"
}
```

POST Method: localhost:8000/reject/2

The screenshot displays the Postman interface for a POST request. The left sidebar shows a collection named 'My Collection' with two items: 'GET Get data' and 'POST Post data'. The main panel shows the 'POST Get data' request to 'localhost:8000/doctor/reject/2'. The request body is a JSON object with a single key 'doctor_note' and the value 'not ava'. The response is a 200 OK status with a response time of 19 ms and a body size of 358 B. The response body is a JSON object with the following fields: id, patient_id, doctor_id, patient_name, doctor_name, specialization, date, time, reason, status, and doctor_note.

Request:

```
POST localhost:8000/doctor/reject/2
```

Body (raw):

```
1 {
2   | "doctor_note": "not ava"
3 }
```

Response:

```
1 {
2   | "id": 2,
3   | "patient_id": 2,
4   | "doctor_id": 2,
5   | "patient_name": "Dr. Rohit Mehta",
6   | "doctor_name": "Dr. Rohit Mehta",
7   | "specialization": "Neurologist",
8   | "date": "12/07/2026",
9   | "time": "10:30am",
10  | "reason": "dfighjk",
11  | "status": "Rejected",
12  | "doctor_note": "not ava"
13 }
```