



Hands-on Lab: Db2 System Tables

Estimated time needed: 20 minutes

In this lab, you will learn how to access and work with system tables in the Db2 relational database management system. Every Db2 database contains system catalog tables that store metadata and definitions of the database objects such as tables, views, indexes, etc.

Objectives

After completing this lab, you will be able to use Db2 on Cloud to:

- Explore the system catalog tables of your Db2 database
- Query the system catalog to retrieve metadata from tables in your database
- Query the system catalog to retrieve column metadata

Software Used in This Lab

In this lab, you will use [IBM Db2 Database](#). Db2 is a Relational Database Management System (RDBMS) from IBM, designed to store, analyze and retrieve data efficiently.

IBM Db2

To complete this lab, you will use a Db2 database service on IBM Cloud. If you did not complete the following lab earlier, you may not have access to Db2 on Cloud and should complete that lab before starting this lab.

- [Hands-on Lab : Sign up for IBM Cloud and Create Db2 service instance](#)

Database Used in This Lab

The database used in this lab is an internal database. You will be working on a sample HR database. This HR database schema consists of 5 tables called EMPLOYEES, JOB_HISTORY, JOBS, DEPARTMENTS and LOCATIONS. Each table has a few rows of sample data. The following diagram shows the tables for the HR database:

SAMPLE HR DATABASE TABLES

EMPLOYEEES

EMP_ID	F_NAME	L_NAME	SSN	B_DATE	SEX	ADDRESS	JOB_ID	SALARY	MANAGER_ID	DEP_ID
E1001	John	Thomas	123456	1976-01-09	M	5631 Rice, OakPark,IL	100	100000	30001	2
E1002	Alice	James	123457	1972-07-31	F	980 Berry ln, Elgin,IL	200	80000	30002	5
E1003	Steve	Wells	123458	1980-08-10	M	291 Springs, Gary,IL	300	50000	30002	5

JOB_HISTORY

EMPL_ID	START_DATE	JOBS_ID	DEPT_ID
E1001	2000-01-30	100	2
E1002	2010-08-16	200	5
E1003	2016-08-10	300	5

JOBS

JOB_IDENT	JOB_TITLE	MIN_SALARY	MAX_SALARY
100	Sr. Architect	60000	100000
200	Sr.SoftwareDeveloper	60000	80000
300	Jr.SoftwareDeveloper	40000	60000

DEPARTMENTS

DEPT_ID_DEP	DEP_NAME	MANAGER_ID	LOC_ID
2	Architect Group	30001	L0001
5	Software Development	30002	L0002
7	Design Team	30003	L0003
5	Software	30004	L0004

LOCATIONS

LOCT_ID	DEP_ID_LOC
L0001	2
L0002	5
L0003	7

Exercise 1: Load the Database into Db2

To get started, let's open up Db2 on IBM Cloud and create the sample HR database.

- Download the sample HR database by right-clicking the following link and saving as HR_Database_Create_Tables_Script.sql: [Sample HR Database](#)
- Open up and log in to the [IBM Cloud](#).
- In left pane, click the "Resource list" button.
- Under the "Services and software" subsection, select the Db2 database. It will be titled some variation of "Db2-xx" where xx is some combination of letters and numbers.

Resource list

Create resource +

Name	Group	Location	Product	Status	Tags
<input type="text" value="Filter by name or IP address..."/>	<input type="text" value="Filter by group or org..."/>	<input type="text" value="Filter..."/>	<input type="text" value="Filter..."/>	<input type="text" value="Filter..."/>	<input type="text" value="Filter..."/>
Container Registry (0)					
Satellite (0)					
Cloud Foundry apps (0)					
Cloud Foundry services (0)					
Services and software (5)					
Db2-qk	Default	Dallas	Db2	Active	-
KnowledgeCatalog	Default	Dallas	Watson Knowledge Catalog	Active	cpdaas
WatsonMachineLearning	Default	Dallas	Machine Learning	Active	cpdaas
WatsonOpenScale	Default	Dallas	Watson OpenScale	Active	cpdaas
WatsonStudio	Default	Dallas	Watson Studio	Active	cpdaas
Storage (1)					
CV Studio	Default	Global	Cloud Object Storage	Active	comput... +1
Network (0)					

5. Click the "Go to UI" button to open the user interface for Db2.

IBM Cloud

Search resources and offerings...

Catalog

Docs

Support

Manage

David Pasterna...

Resource list /

Db2-qk

Active

Add tags

Details

Actions...

Manage

Getting started

Service credentials

Connections

Getting started

Where can I find my credentials?
Get your username and password by clicking the "Service Credentials" link to the left and selecting "New Credentials".

Go to UI

Getting started docs

Need help?


Use IBM Answers to view recently asked questions or ask your own.
Still unable to find an answer? Submit a IBM Cloud Support Case to our team.

IBM answers

Support case


6. To upload the sample HR database you are working with, click the "Run SQL" button on the menu tab in the left pane.

7. Click the "From file" button.

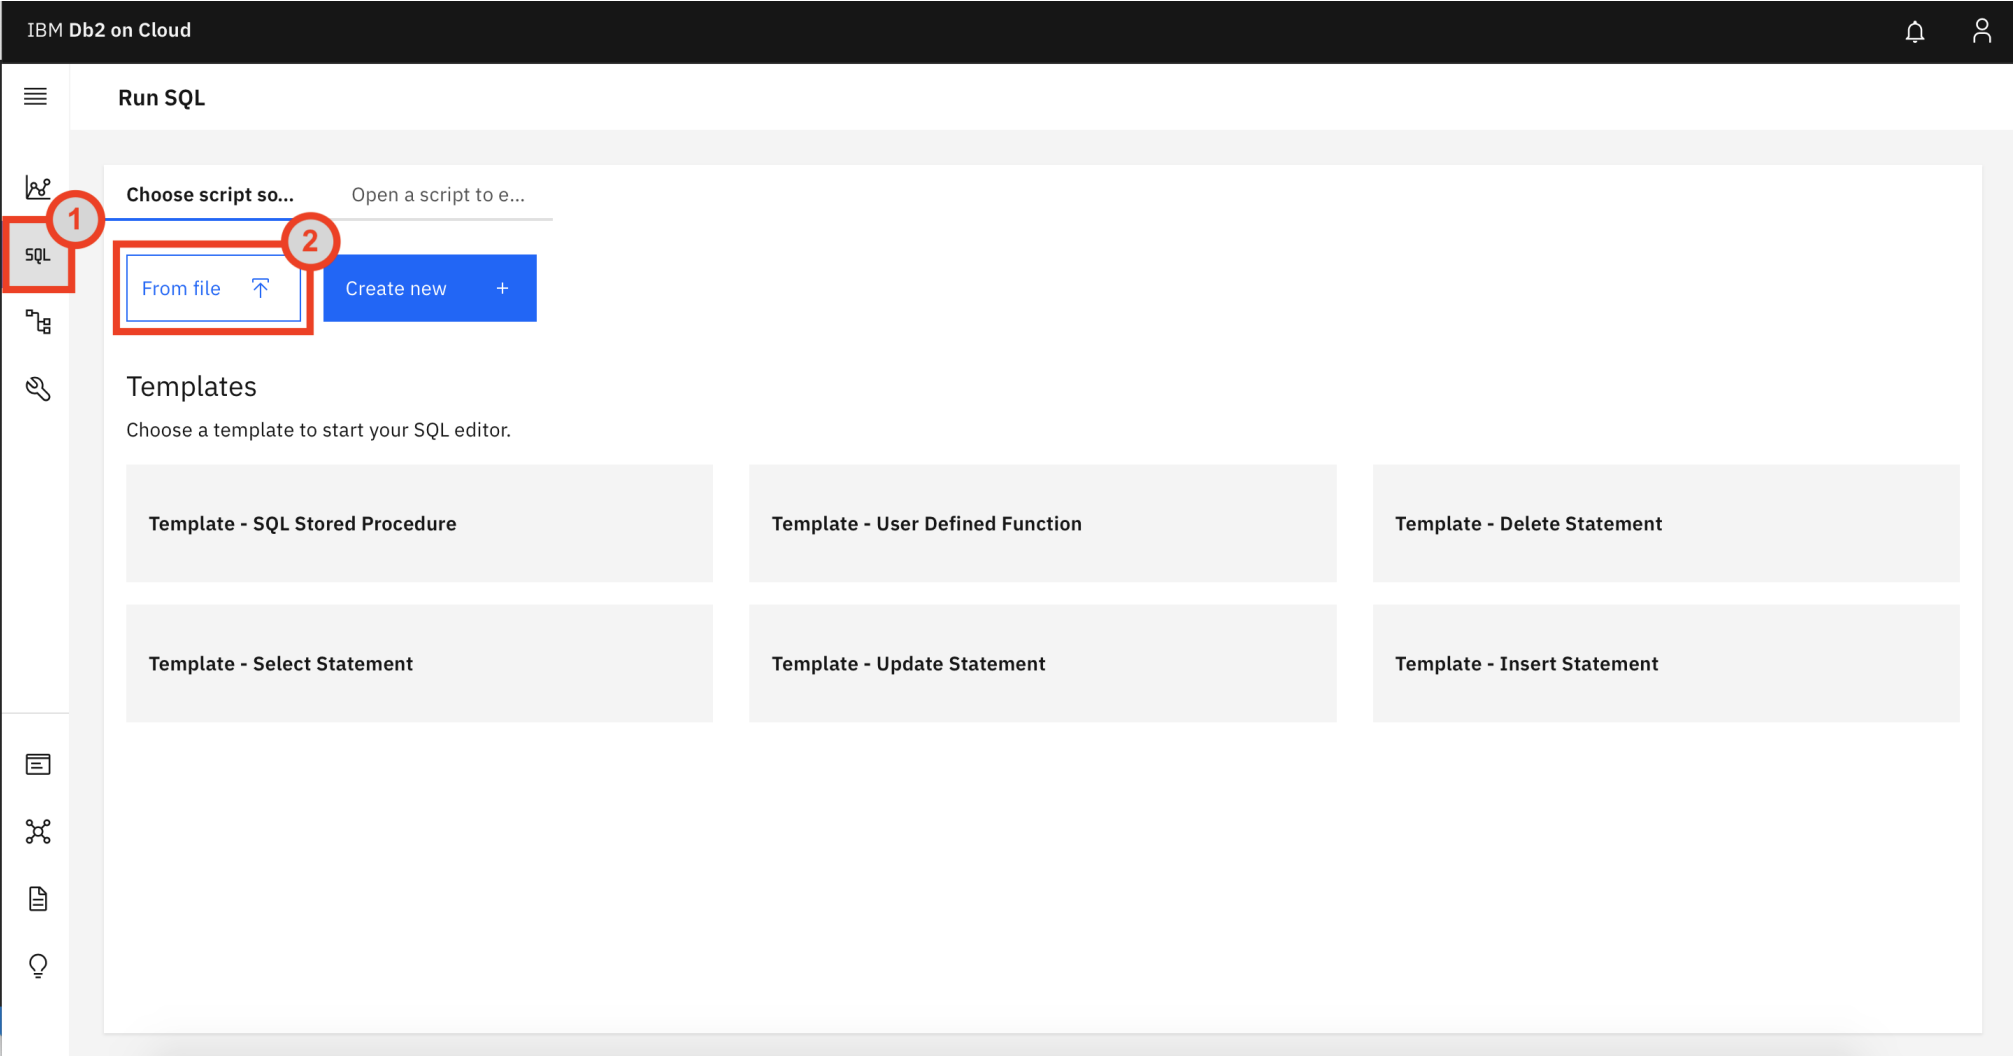

8. Upload the `HR_Database_Create_Tables_Script.sql` file you downloaded in Step 1.

9. Click the "Run all" button.

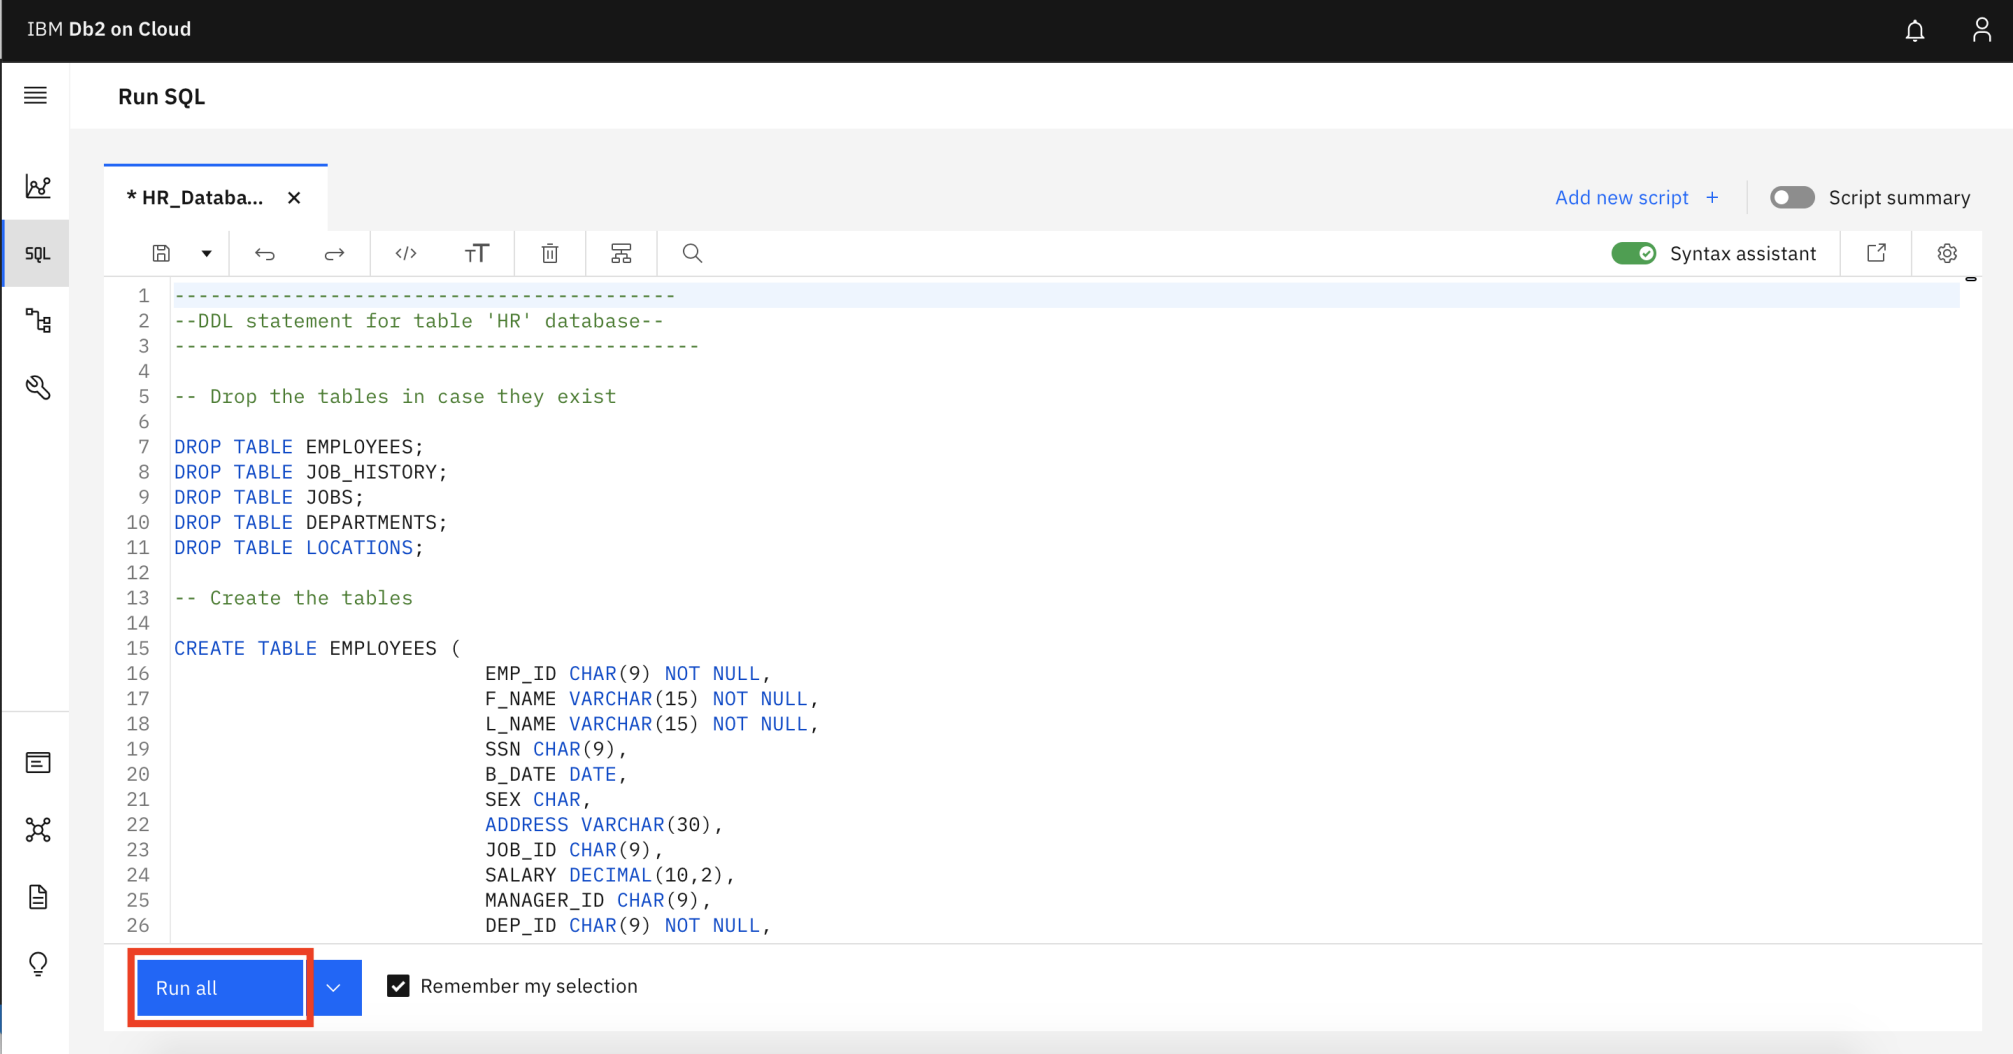

After executing this SQL code, your Db2 server will now have a database containing several tables.


Exercise 2: Access the Db2 System Tables

Every Db2 database has a **SYSTABLES** catalog table. From the official [IBM Db2 documentation](#), the SYSTABLES table contains one row for each table, view, or alias. Each table row indicates whether the object that it describes is a table, view, or alias, its name, who created it, the database that it belongs to, the table space it belongs to, and other information. The SYSTABLES table also has a REMARKS column in which you can store your own information about the table in question.


In essence, the SYSTABLES catalog table contains metadata about all other database objects in the Db2 server. Let's go ahead and see how you can access some of this useful metadata.

Task A: Perform a Simple Query on SYSTABLES

1. Click the "Add new script" button.

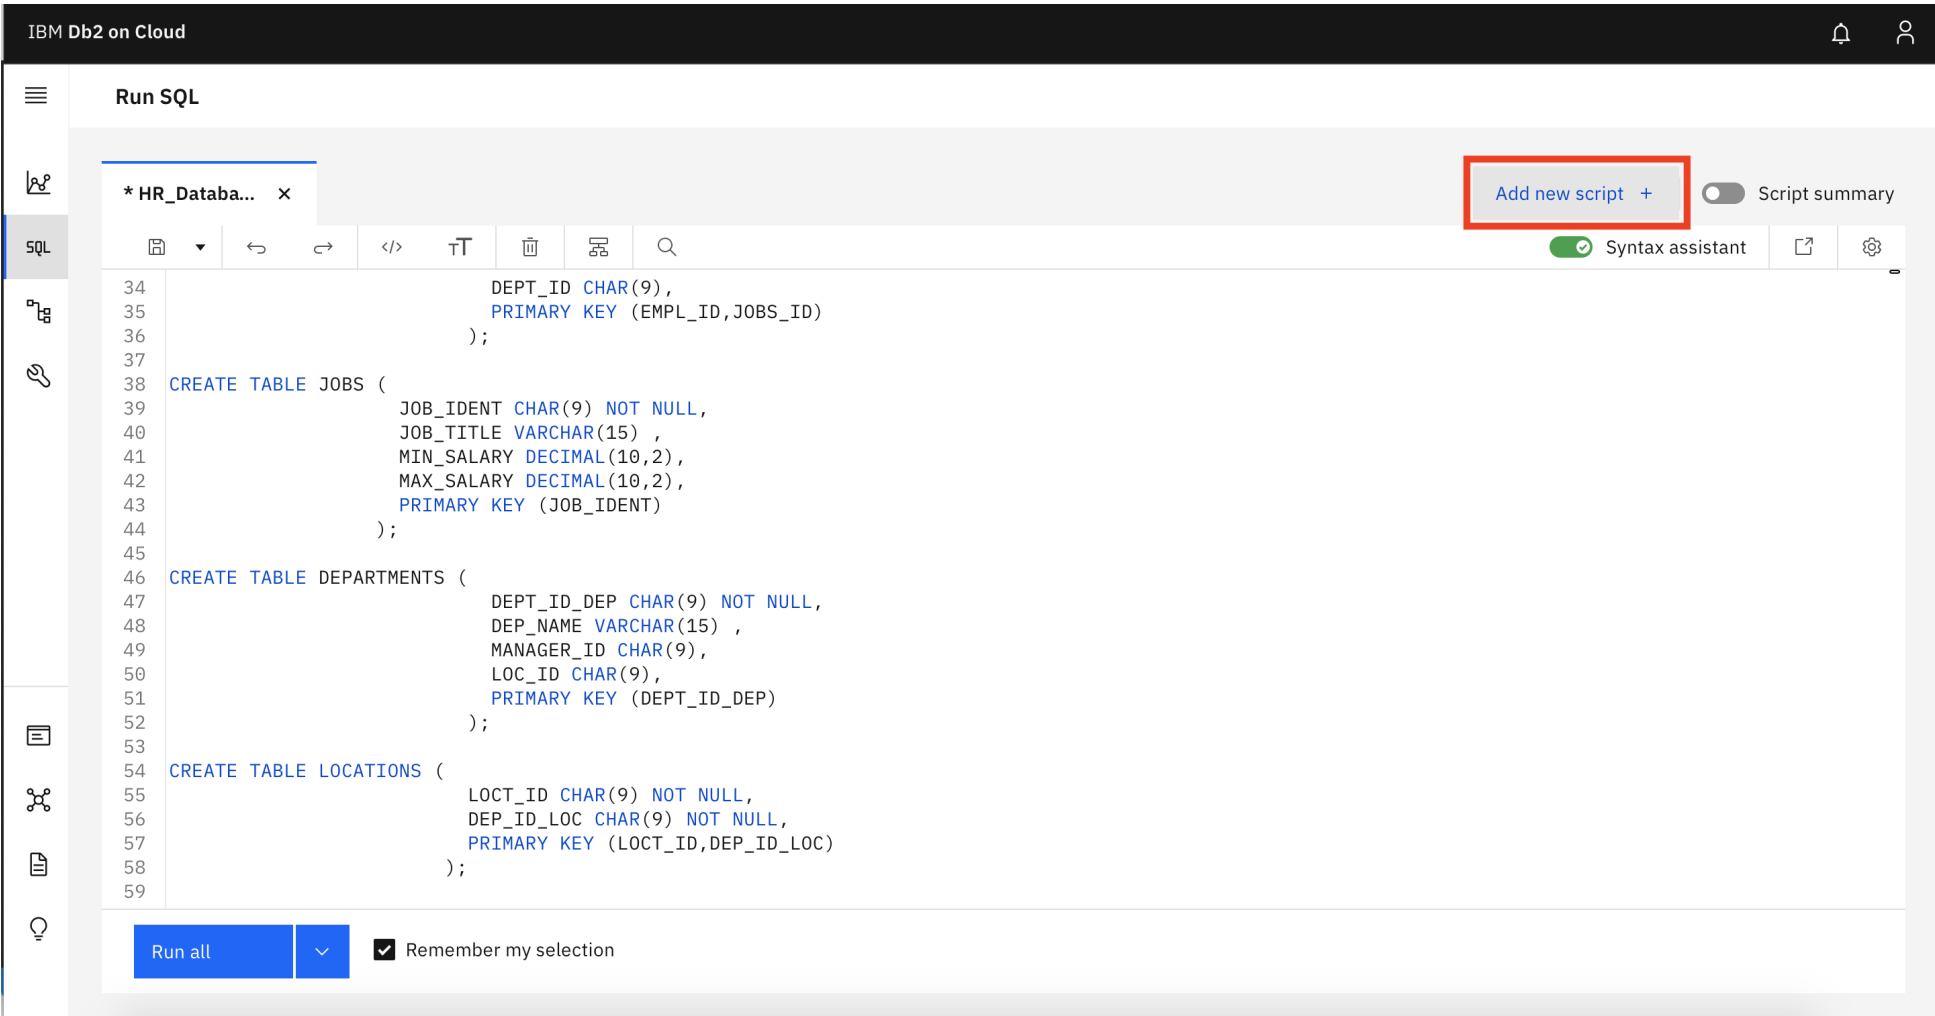

2. Click "Create new" to open an empty SQL editor.

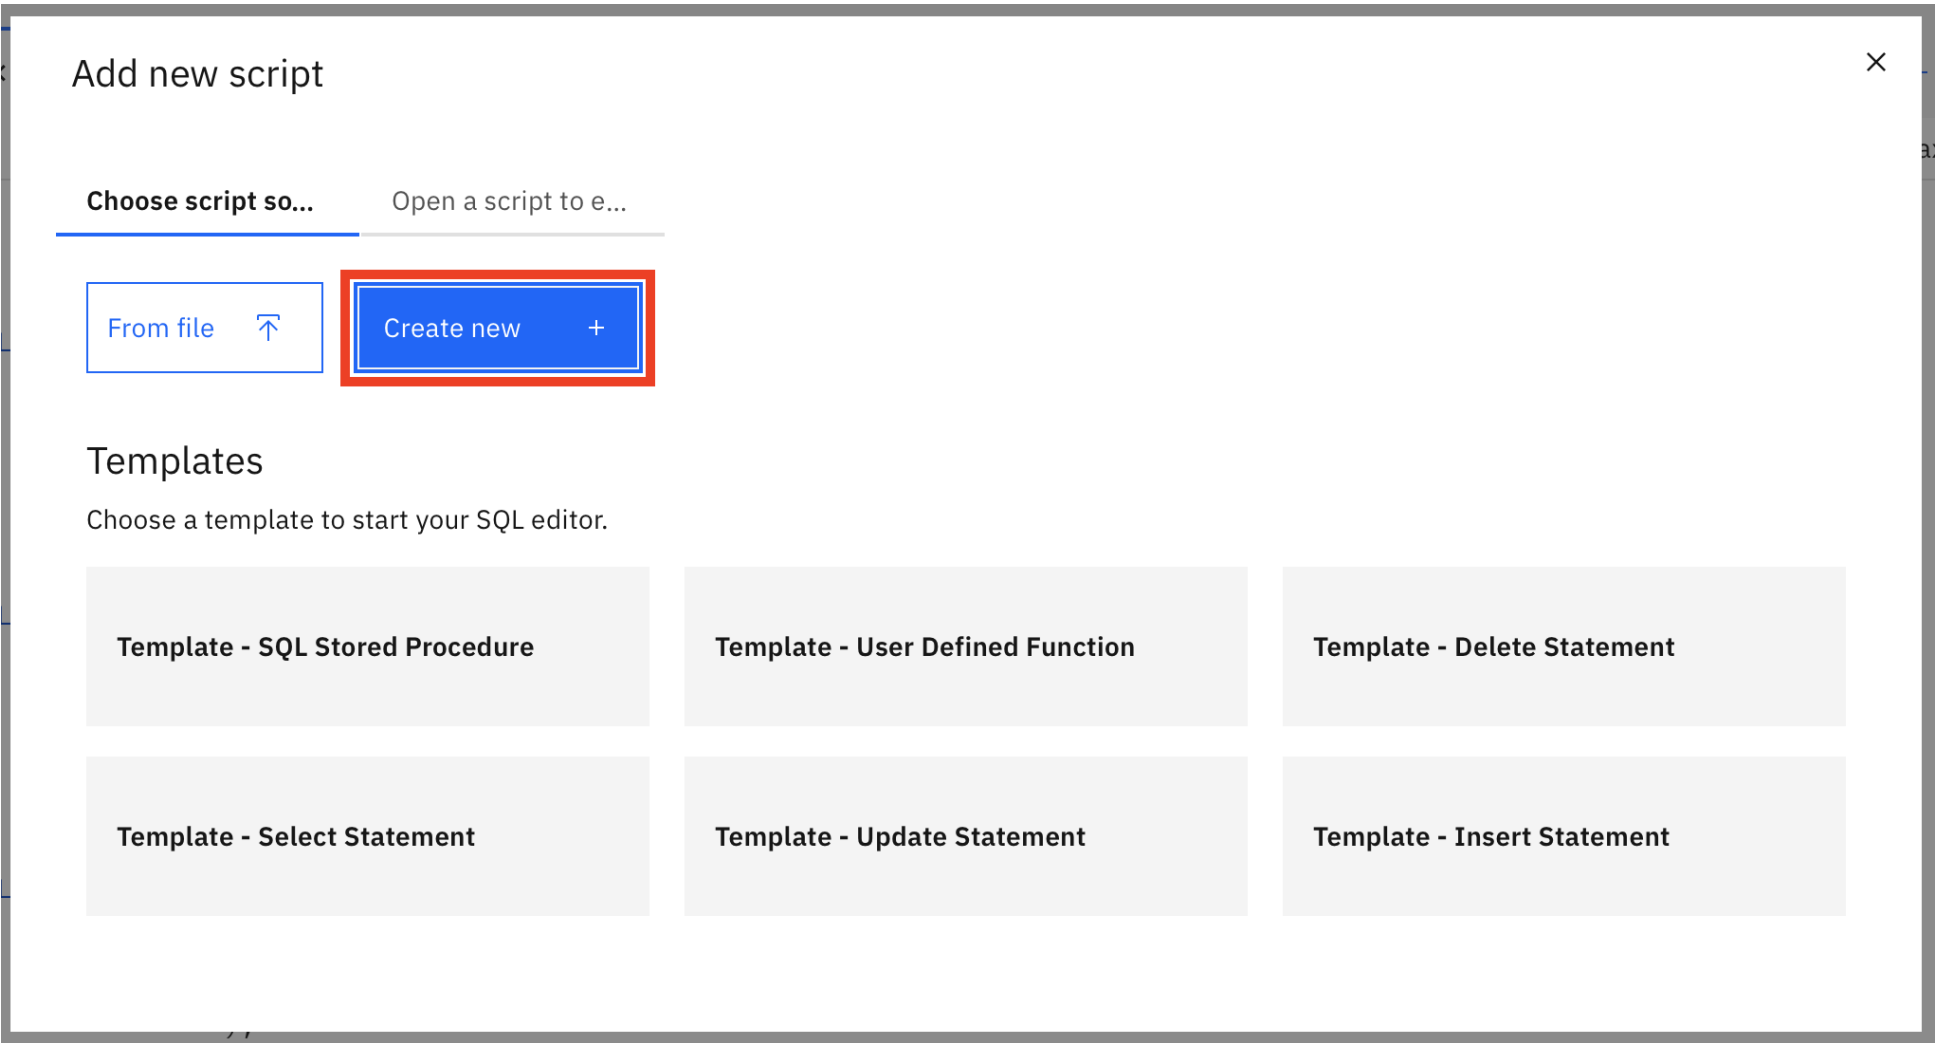

3. Let's start off with the most basic query on the SYSTABLES table by taking a look at the whole table. Enter the following code into the SQL editor and click the "Run all" button.

```
SELECT * FROM SYSIBM.SYSTABLES;
```

HR_Database_C...

Untitled - 1

Run all

Remember my selection

1

2

SELECT * FROM SYSIBM.SYSTABLES;

Syntax assistant

Result - Sep 23, 2021 10:47:40 AM

SELECT * FROM SYSIBM.SYSTABLES

Run time: 0.027 s

Result set 1

Find

NAME	CREATOR	TYPE	CTIME
SYSTABLES	SYSIBM	T	2021-02-03 18:03:59.356402
SYSCOLUMNS	SYSIBM	T	2021-02-03 18:03:59.356402
SYSINDEXES	SYSIBM	T	2021-02-03 18:03:59.356402
SYSVIEWS	SYSIBM	T	2021-02-03 18:03:59.356402
SYSVIEWDEP	SYSIBM	T	2021-02-03 18:03:59.356402

Result set is truncated, only the first 44 rows have been loaded. Select "View all loaded data" on the right top of the result to view all loaded rows.


More

The result of the query is shown on the right-hand side of the screen. There are numerous results with only the first few displayed. You can see the first few columns showing the name of the table, its creator, and the type of the database object (T for table). The first five shown are all system tables and you can see that the creator is **SYSIBM**.


Task B: Query SYSTABLES by CREATOR

Let's do a slightly more advanced query on **SYSIBM.SYSTABLES** to retrieve the metadata for the tables you created for your sample HR database. One way to do this is to query the table based on the **CREATOR** column, which stores the schema that the given table belongs to.

1. First, you need to find the schema name for your Db2 database. In the left pane, click the "Data" button.

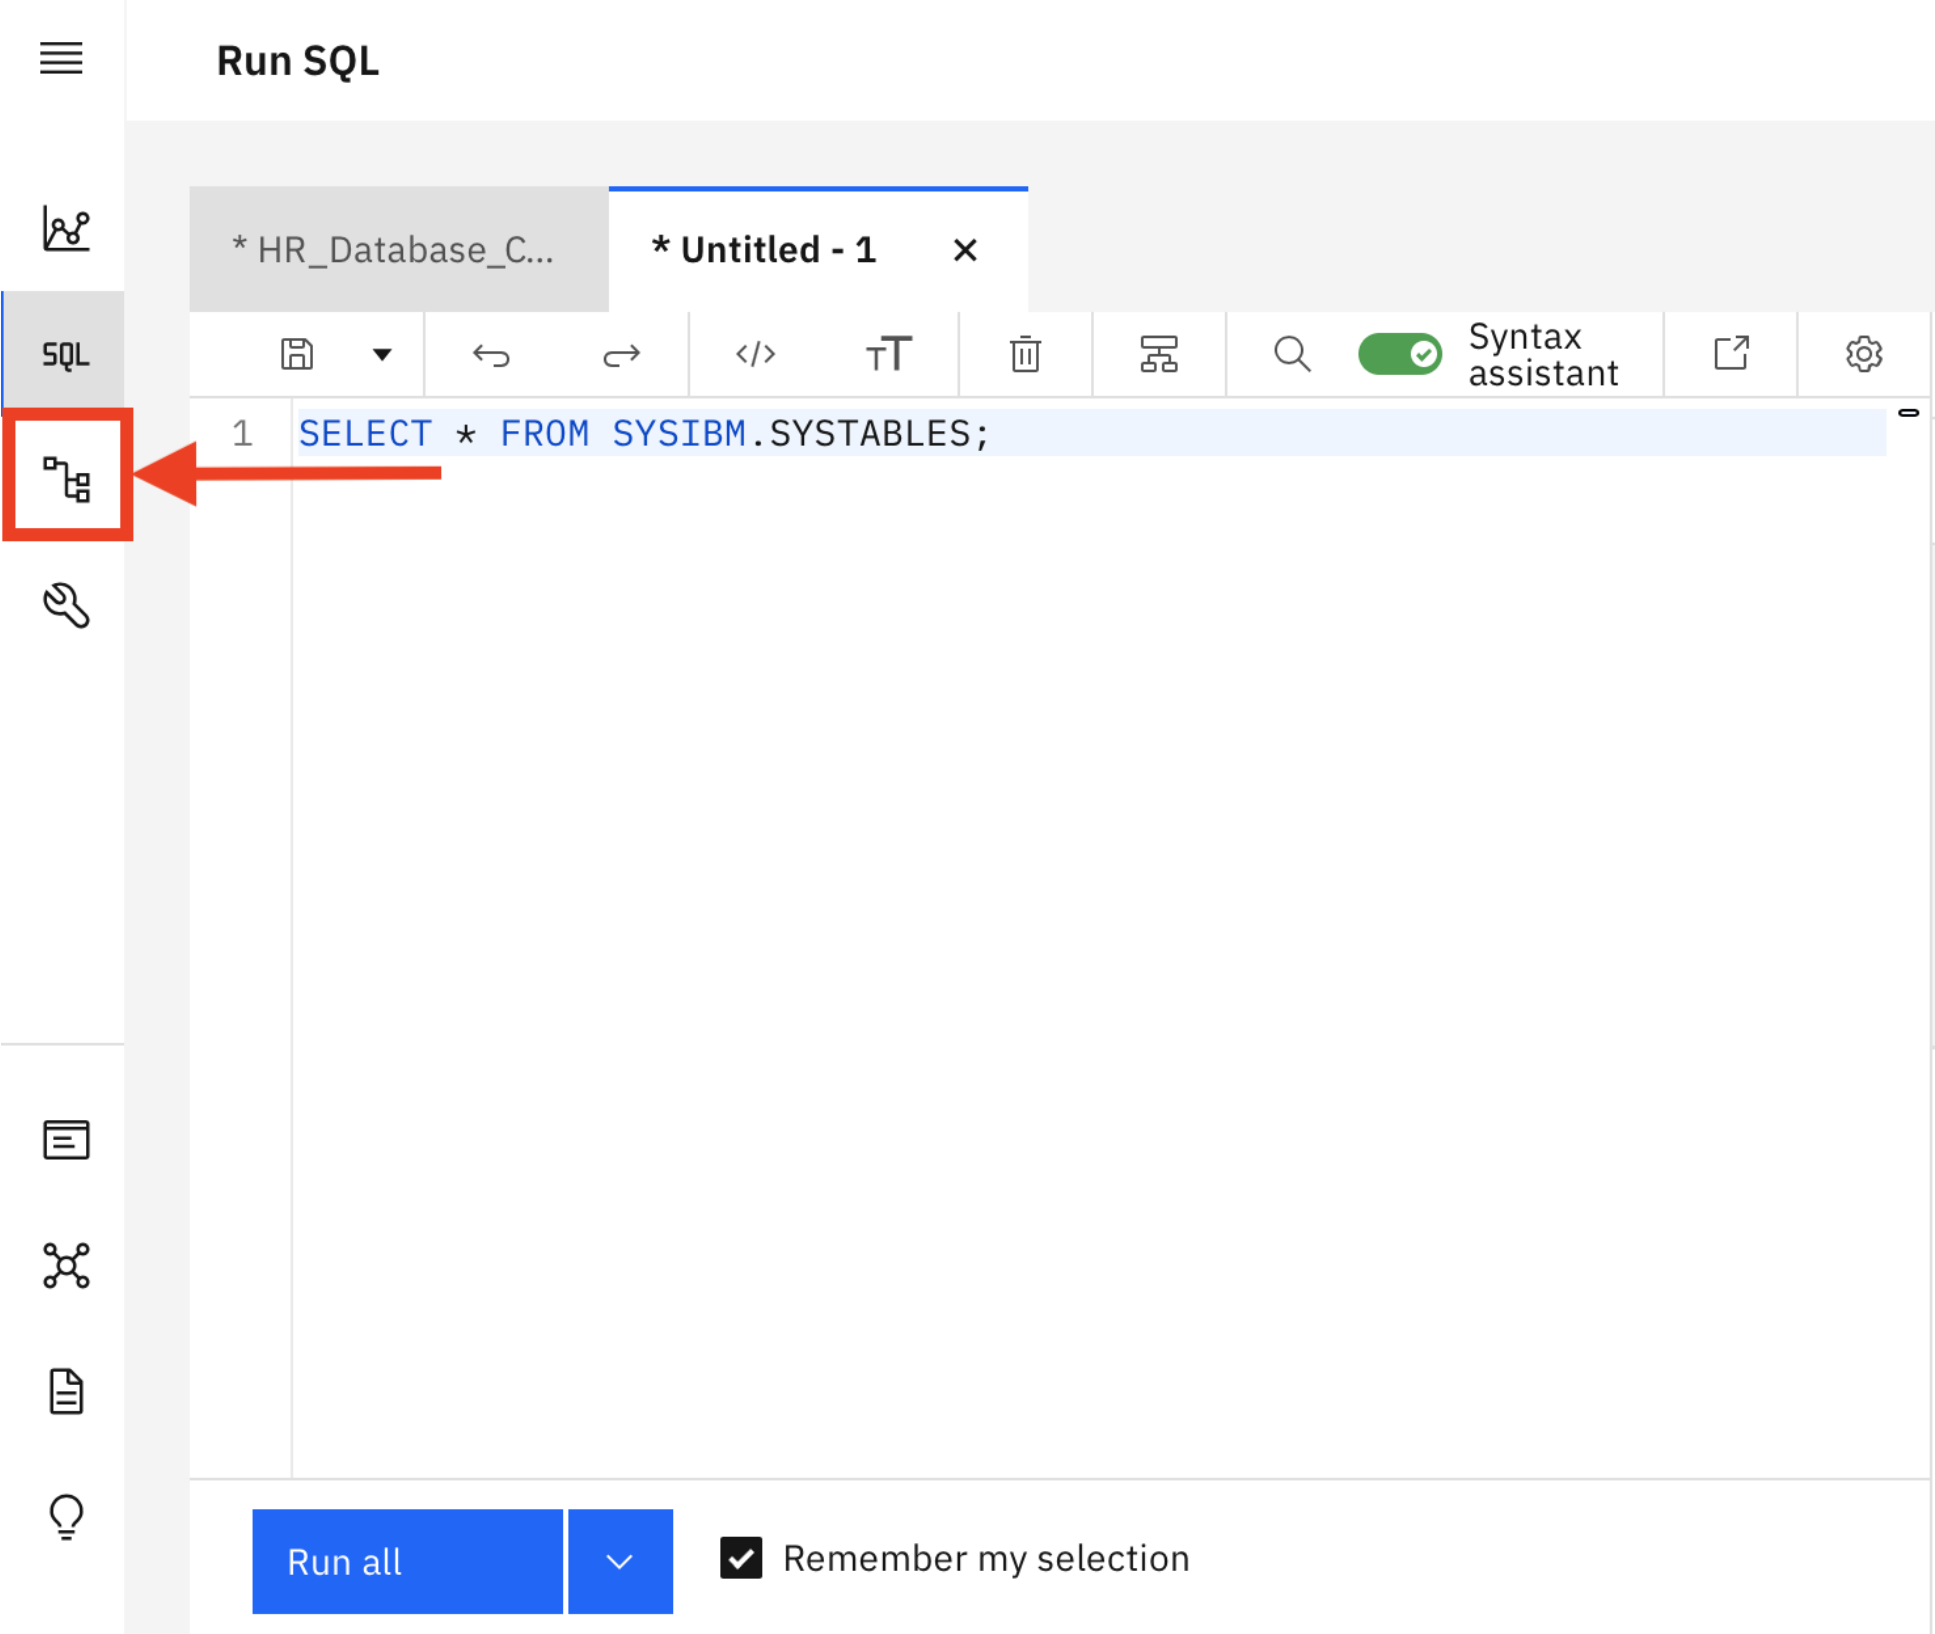

2. Click the "Tables" button located in the top menu bar.

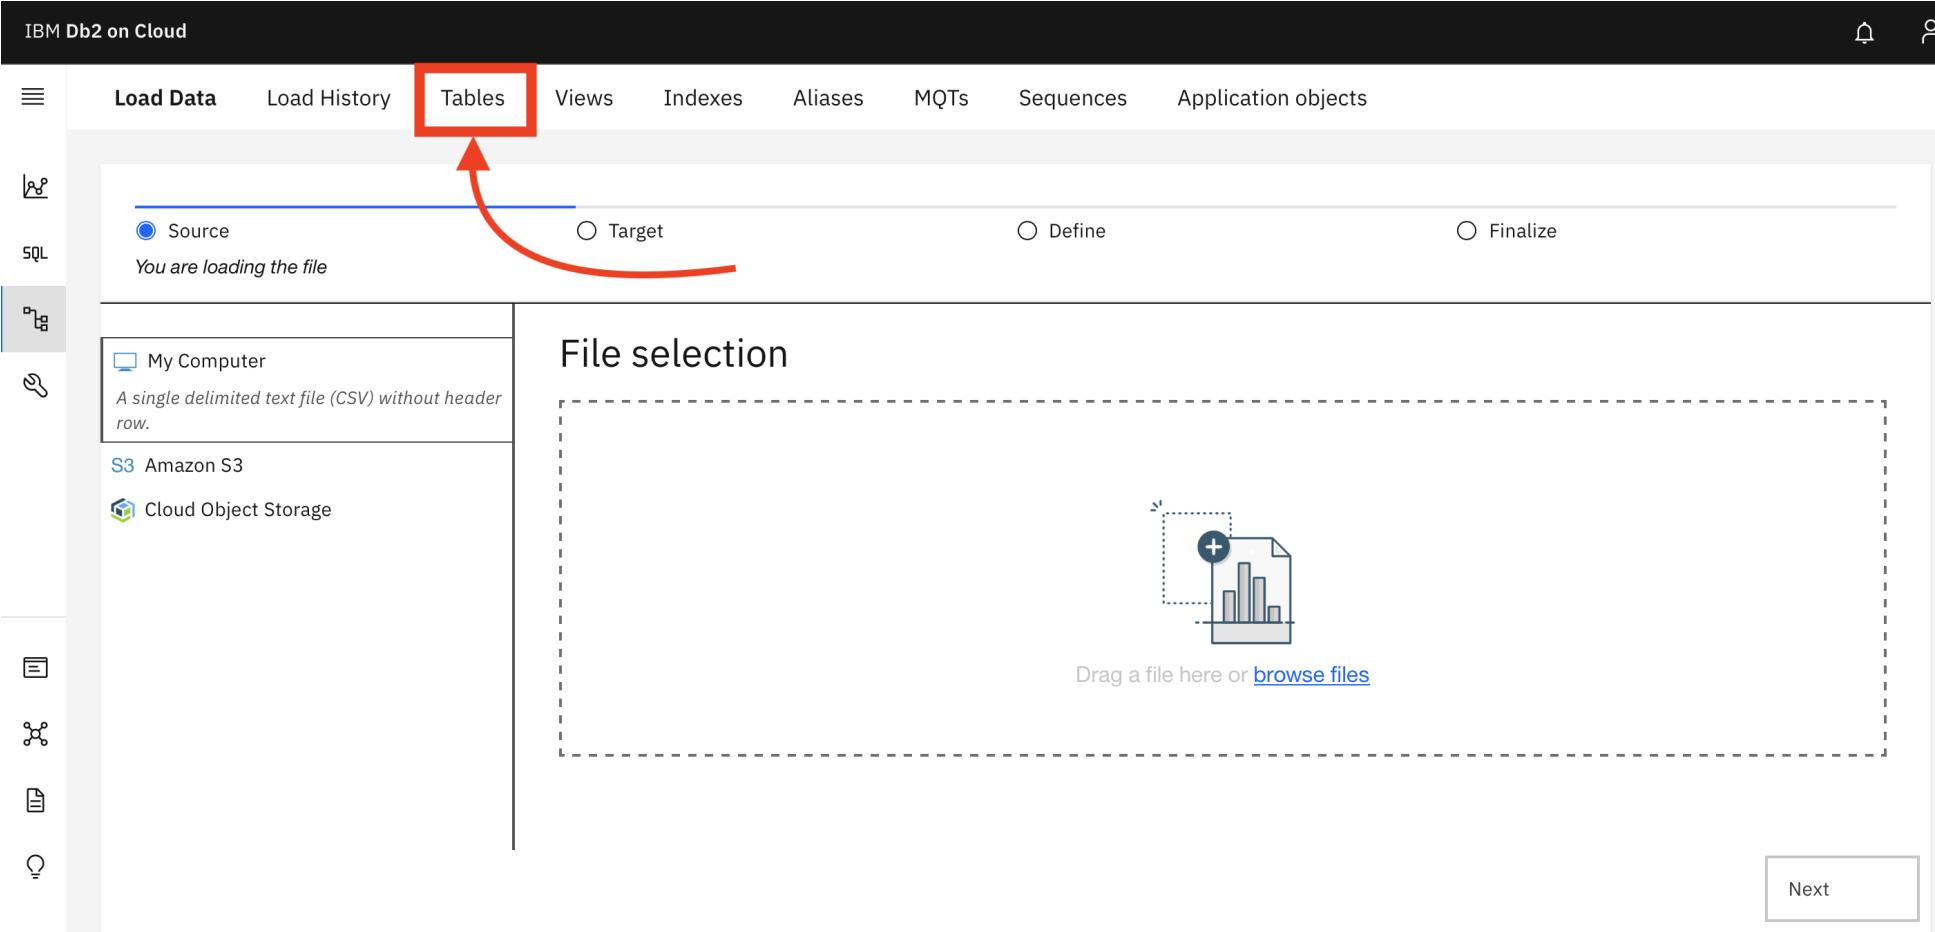

3. Copy the name you see under the "Name" field and either write it down or paste it in a text editor of your choice. This is the schema name. In the screenshot below, this name is **ZLV36117**. In your case, it will certainly be a different name.

Schemas

<input type="checkbox"/> Name	Type	Tables ▲
<input type="checkbox"/> ZLV36117	User	5

4. In the left pane, click the "SQL" button.
5. Enter the following SQL command to query the **SYSTABLES**, replacing the part within the single quotes with the name you copied in Step 3:

```
SELECT * FROM SYSIBM.SYSTABLES WHERE CREATOR = '<insert name here>';
```

6. Finally, click the "Run all" button to run the SQL script you created.

IBM Db2 on Cloud

Run SQL

SQL

1

SELECT * FROM SYSIBM.SYSTABLES WHERE CREATOR = '<insert name here>';

2

Run all

3

Remember my selection

IBM Db2 on Cloud

Run SQL

SQL

1

SELECT * FROM SYSIBM.SYSTABLES WHERE CREATOR = 'ZLV36117';

Result - Sep 23, 2021 4:46:46 PM

Result set 1

NAME	CREATOR	TYPE	CTIME
EMPLOYEES	ZLV36117	T	2021-09-22 13:47:08.8419
JOB_HISTORY	ZLV36117	T	2021-09-22 13:47:09.0504
JOBS	ZLV36117	T	2021-09-22 13:47:09.2823
DEPARTMENTS	ZLV36117	T	2021-09-22 13:47:09.5181
LOCATIONS	ZLV36117	T	2021-09-22 13:47:09.6975

Again, on the right-hand side of the screen you can see the results of the query you executed. You can see the five tables that belong to the sample HR database and that their type is "T" for table.

Task C: Try Updating a System Table

In a Db2 database, the system tables cannot be edited directly with **INSERT**, **UPDATE**, or **DELETE** statements. When you create, modify, or delete other objects in the database, the system tables are automatically updated to reflect the changes. Therefore, system tables are only for *retrieving* metadata about other objects in your database, you do not modify them directly.

The current name for the "CREATOR" of the five tables that belong to the sample HR database appears to be some random combination of letters and numbers, but suppose you wanted to modify the entries in "SYSTABLES" to have a different schema name in the "CREATOR" column for those tables.

Let's see what happens if you try to modify the "CREATOR" column in "SYSTABLES".

1. In the SQL editor, enter the following command and replace **<current creator name>** with the schema name you copied earlier in Step 3 of Task B. Replace **<new creator name>** with a new name of your choice, then click the "Run all" button.

UPDATE SYSIBM.SYSTABLES SET CREATOR = '<new creator name>' WHERE CREATOR = '<current creator name>';

IBM Db2 on Cloud

Run SQL

* HR_Database_C...

* Untitled - 1

Add new script +

Script summary

SQL

1 UPDATE SYSIBM.SYSTABLES SET CREATOR = 'DAVID' WHERE CREATOR = 'ZLV36117';

Run all

Remember my selection

Running this code results in the following error in the output:

Result - Sep 24, 2021 3:52:20 PM

UPDATE SYSIBM.SYSTABLES SET C...

Run time: 0.014 s

Status: Failed

Error message

The column "CREATOR" cannot be updated.. SQLCODE=-151, SQLSTATE=42808, DRIVER=4.27.25

Learn more about this error

As you can see, attempting to execute an **UPDATE** command directly on SYSIBM.SYSTABLES, which is a system table, results in an error.

Exercise 3: Try it yourself!

As mentioned in the previous exercise, Db2 system tables cannot be modified directly. Instead, they store metadata about all objects in the database and are automatically updated to reflect any changes made to them, including the creation or deletion of database objects.

You will now get an opportunity to apply what you learned and see this in action for yourself. In this practice exercise, use the SQL editor along with the steps given below.

1. **Try it yourself:** Query the **SYSTABLES** table by the schema name to display the five tables that belong to the sample HR database.

▼ **Hint** (Click Here)

Recall that you performed this exact action in Task B of Exercise 2.

▼ **Solution** (Click Here)

```
SELECT * FROM SYSIBM.SYSTABLES WHERE CREATOR = '<insert schema name here>';
```

2. **Try it yourself:** Try directly deleting the row corresponding to the EMPLOYEES table from the SYSIBM.SYSTABLES system table.

▼ **Hint** (Click Here)

You can delete a row from a table using a SQL command of the following form:

```
DELETE FROM <table_name> WHERE <condition>;
```

▼ **Solution** (Click Here)

```
DELETE FROM SYSIBM.SYSTABLES WHERE NAME = 'EMPLOYEES';
```

1

DELETE FROM SYSIBM.SYSTABLES WHERE NAME = 'EMPLOYEES';

Syntax assistant

Result - Sep 26, 2021 7:04:06 PM

⌵

⋮

⌵

❌ DELETE FROM SYSIBM.SYSTABLES ...

Run time: 0.008 s

⋮

Status: Failed

Error message

"DELETE" is not defined for system objects.. SQLCODE=-607, SQLSTATE=42832, DRIVER=4.27.25

[Learn more about this error](#)

As you may have guessed, this command raises an error since we cannot use **DELETE** commands directly on system tables.

3. **Try it yourself:** Drop the EMPLOYEES table from the database.

▼ **Hint** (Click Here)

You can drop a table from a database using a SQL command of the following form:

```
DROP TABLE <table name>;
```

▼ **Solution** (Click Here)

```
DROP TABLE EMPLOYEES;
```

1

DROP TABLE EMPLOYEES;

Syntax assistant

Result - Sep 27, 2021 12:01:43 PM

⌵

⋮

⌵

✅ DROP TABLE EMPLOYEES

Run time: 0.038 s

⋮

Status: Success | Affected rows: 0

4. **Try it yourself:** Once again, query the **SYSTABLES** table by schema name to confirm that the EMPLOYEES table was successfully dropped from the database.

▼ **Hint** (Click Here)

This is the same query you ran in step 1 of this practice exercise.

▼ **Solution** (Click Here)

```
SELECT * FROM SYSIBM.SYSTABLES WHERE CREATOR = '<insert schema name here>';
```

1

SELECT * FROM SYSIBM.SYSTABLES WHERE CREATOR = 'ZLV36117';

Syntax assistant

Result - Sep 27, 2021 12:40:33 PM

⌵

⋮

⌵

✅ SELECT * FROM SYSIBM.SYSTABLE...

Run time: 0.018 s

⋮

Result set 1

Find

⌵

🔗

NAME	CREATOR	TYPE	CTIME
JOB_HISTORY	ZLV36117	T	2021-09-22 13:47:09.0504
JOBS	ZLV36117	T	2021-09-22 13:47:09.2823
DEPARTMENTS	ZLV36117	T	2021-09-22 13:47:09.5181
LOCATIONS	ZLV36117	T	2021-09-22 13:47:09.6975

As you can see, the SYSTABLES table was automatically updated to reflect that the EMPLOYEES table was dropped from the database. Now only 4 tables are present. You did not have to modify the SYSTABLES directly.

Conclusion

Congratulations on completing this hands-on lab! You now have some understanding and experience of working with the system tables of a Db2 server and are ready for the next step in developing your skill set as a database administrator.

Author

[David Pasternak](#)

Other Contributors

Rav Ahuja, Sandip Saha Joy

Changelog

Date	Version	Changed by	Change Description
2021-09-08	1.0	David Pasternak	Created initial version

© IBM Corporation 2021. All rights reserved.