AI ASSISTED CODING
LAB– 9.2

NAME:K.Manikanta

ENROLL.NO:2403A52040

BATCH:03

Task-1:

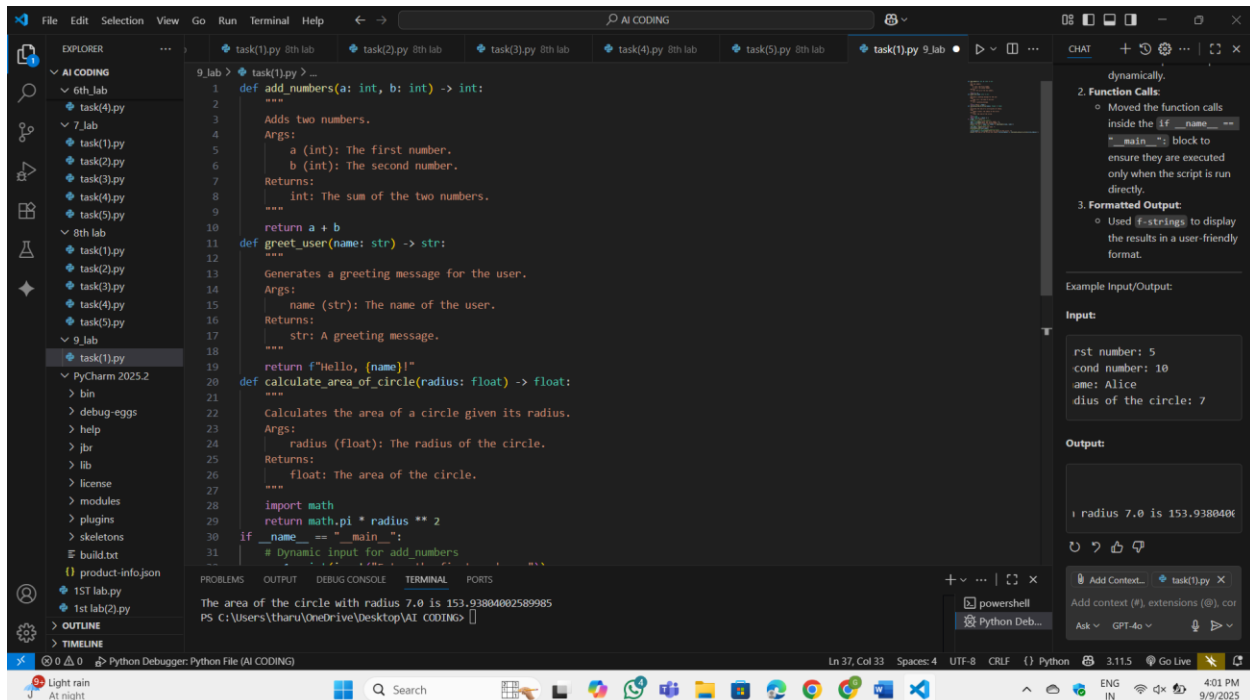(Documentation – Google-Style Docstrings for
Python Functions)
• Task: Use AI to add Google-style docstrings to all functions in a
given Python script.
• Instructions:
o Prompt AI to generate docstrings without providing any
input-output examples.
o Ensure each docstring includes:
▪ Function description
▪ Parameters with type hints
▪ Return values with type hints
▪ Example usage
o Review the generated docstrings for accuracy and
formatting.
• Expected Output #1:
o A Python script with all functions documented using
correctly formatted Google-style docstrings

Prompt:

Add Google-style docstrings to all functions in a given Python script.

Ensure each docstring includes: Function description, Parameters with type hints, Return values with type hints

Code:

OUTPUT:

Observation:

Added input() prompts for each function to allow the user to provide input dynamically. Moved the function calls inside the if __name__ == "__main__": block to ensure they are executed only when the script is run directly. Used f-strings to display the results in a user-friendly format.
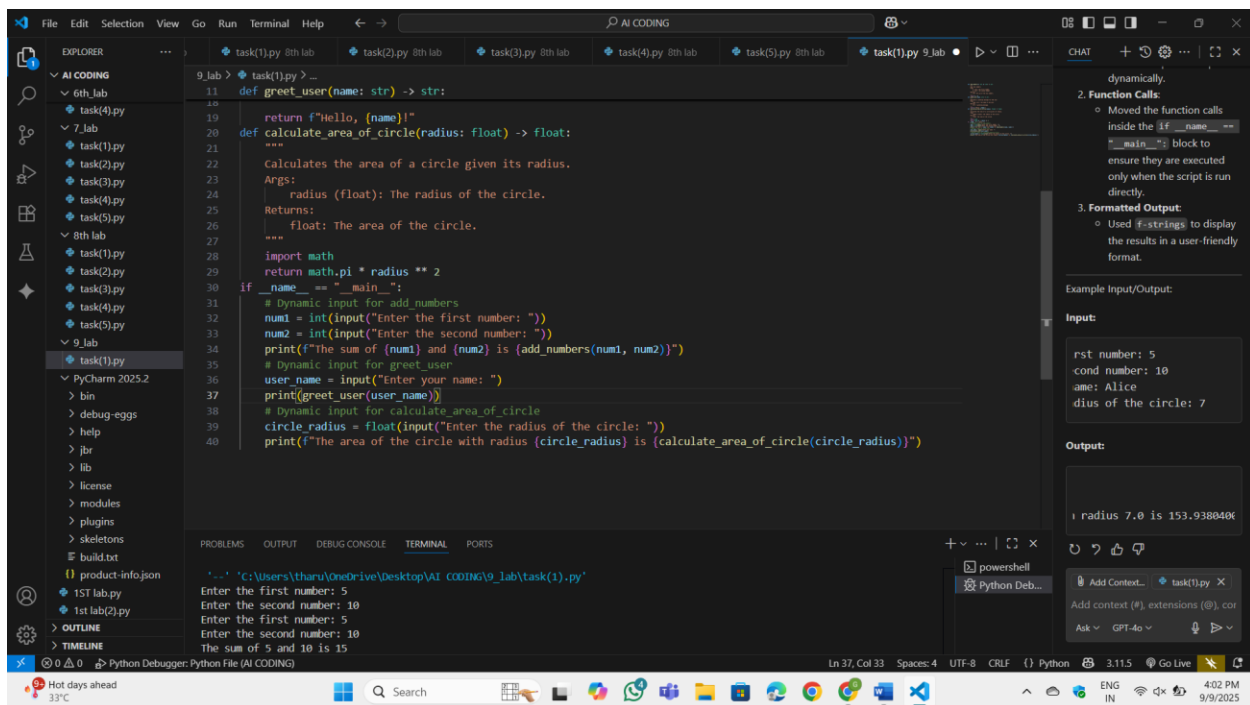
Task-2:

(Documentation – Inline Comments for Complex
Logic)
• Task: Use AI to add meaningful inline comments to a Python
program explaining only complex logic parts.
• Instructions:
o Provide a Python script without comments to the AI.
o Instruct AI to skip obvious syntax explanations and focus
only on tricky or non-intuitive code sections.
o Verify that comments improve code readability and
maintainability.
• Expected Output #2:
o Python code with concise, context-aware inline comments
for complex logic blocks

Prompt :

For the code I provided focus only on tricky or non-intuitive code
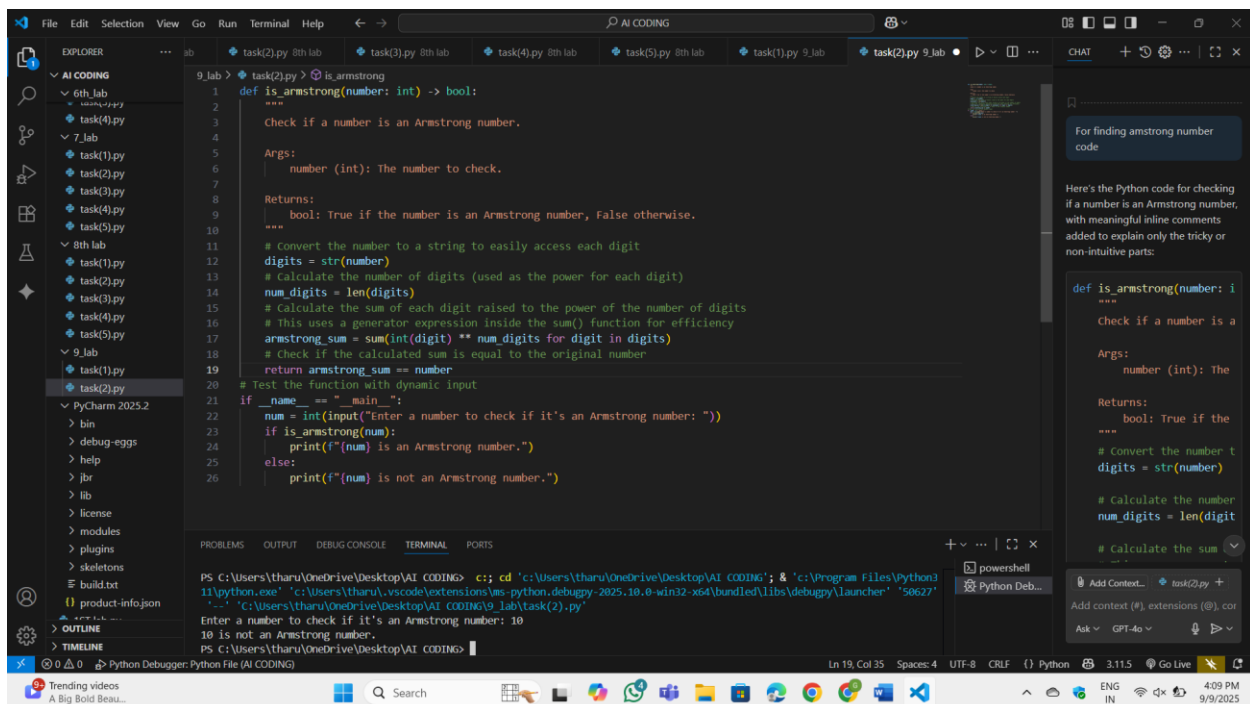sections. And add meaningful inline comments to a Python program
explaining only complex logic parts
Code:
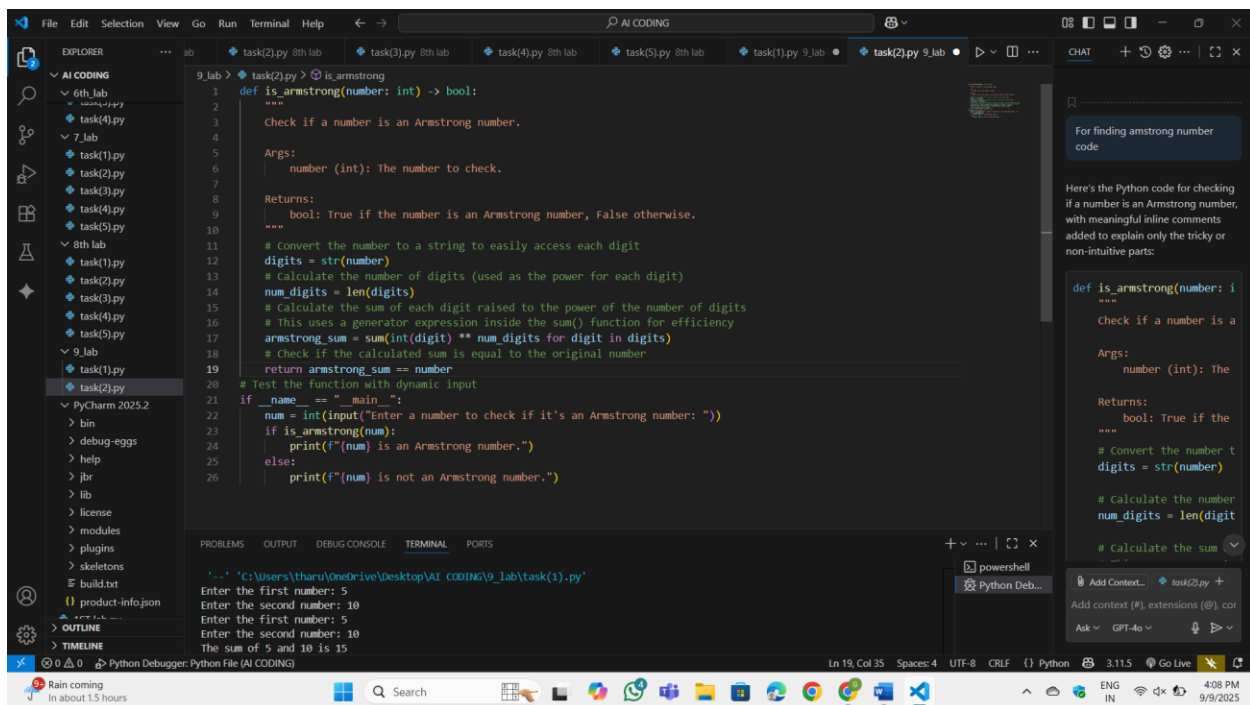
OUTPUT:

Observation:

digits = str(number): Converts the number to a string to allow iteration over its digits. num_digits = len(digits): Calculates the number of digits in the number, which determines the power to which each digit is raised. sum(int(digit) ** num_digits for digit in digits): Uses a generator expression to calculate the sum of each digit raised to the power of num_digits. This avoids creating an intermediate list, making the code more memory-efficient. return armstrong_sum == number: Compares the calculated sum to the original number to determine if it's an Armstrong number

Task-3:

(Documentation – Module-Level Documentation)
• Task: Use AI to create a module-level docstring summarizing the purpose, dependencies, and main functions/classes of a Python file.

• Instructions:
o Supply the entire Python file to AI.
o Instruct AI to write a single multi-line docstring at the top of the file.
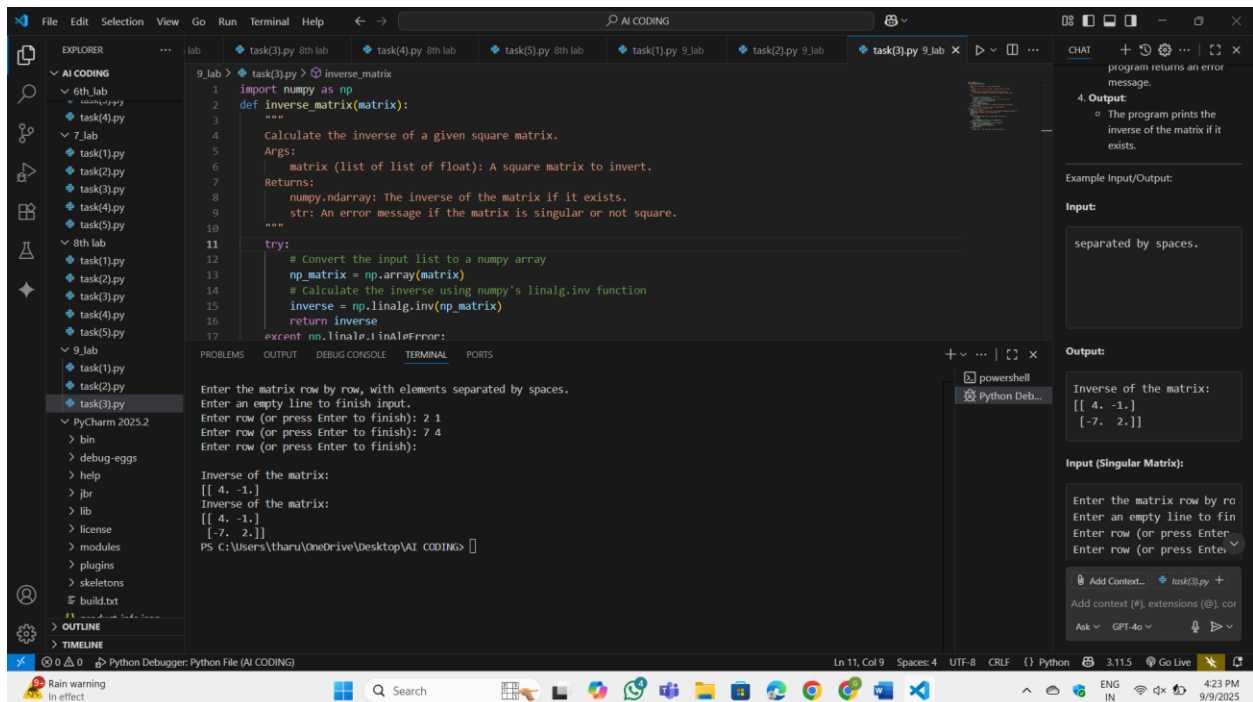o Ensure the docstring clearly describes functionality and usage without rewriting the entire code

Prompt:

For the given code describes functionality and usage without rewriting the entire code

Code:
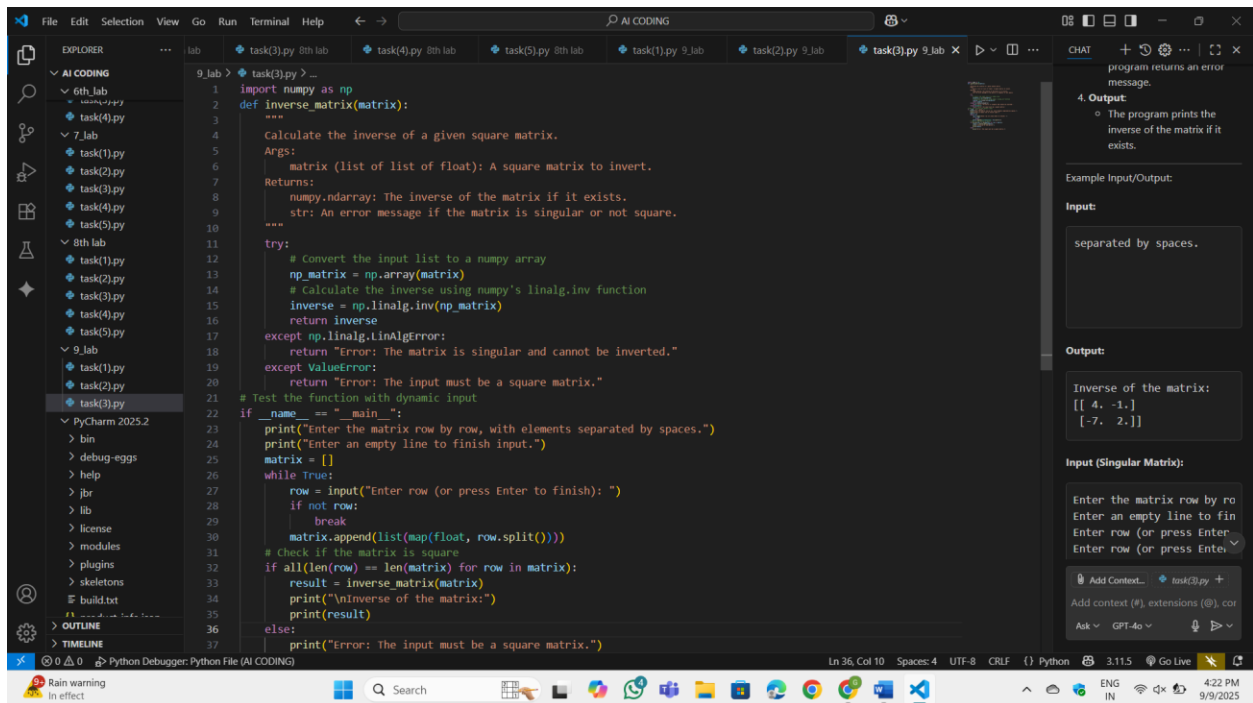
OUTPUT:

OBSERVATION:

The numpy library is used for matrix operations.
The np.linalg.inv() function calculates the inverse of a matrix. The user inputs the matrix row by row. The input is converted into a list of lists, where each inner list represents a row. If the matrix is not square, the program returns an error message. If the matrix is singular (determinant = 0), the program returns an error message. The program prints the inverse of the matrix if it exists.

Task-4:

(Documentation – Convert Comments to
Structured Docstrings)
• Task: Use AI to transform existing inline comments into
structured function docstrings following Google style.
• Instructions:
o Provide AI with Python code containing inline comments.
o Ask AI to move relevant details from comments into
function docstrings.
o Verify that the new docstrings keep the meaning intact
while improving structure.
• Expected Output #4:
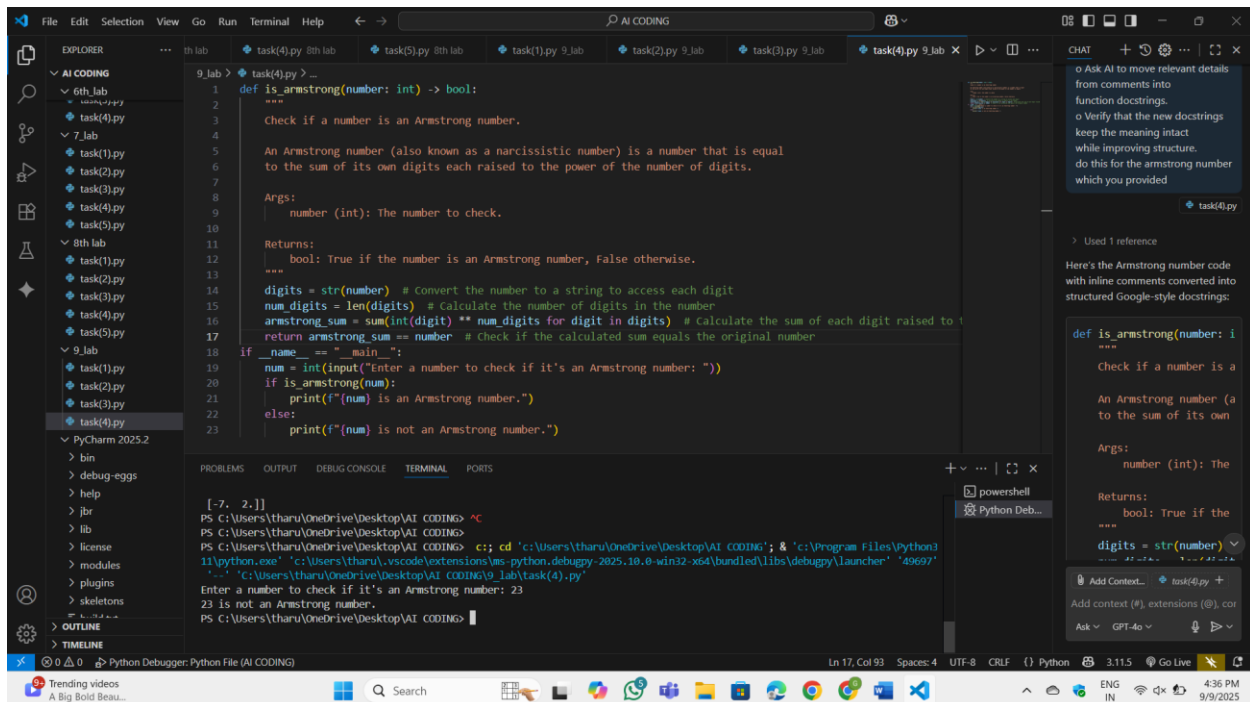o Python code with comments replaced by clear,
standardized docstrings

Prompt:

convert Comments to Structured Docstrings for the code which I
provided.

Code:
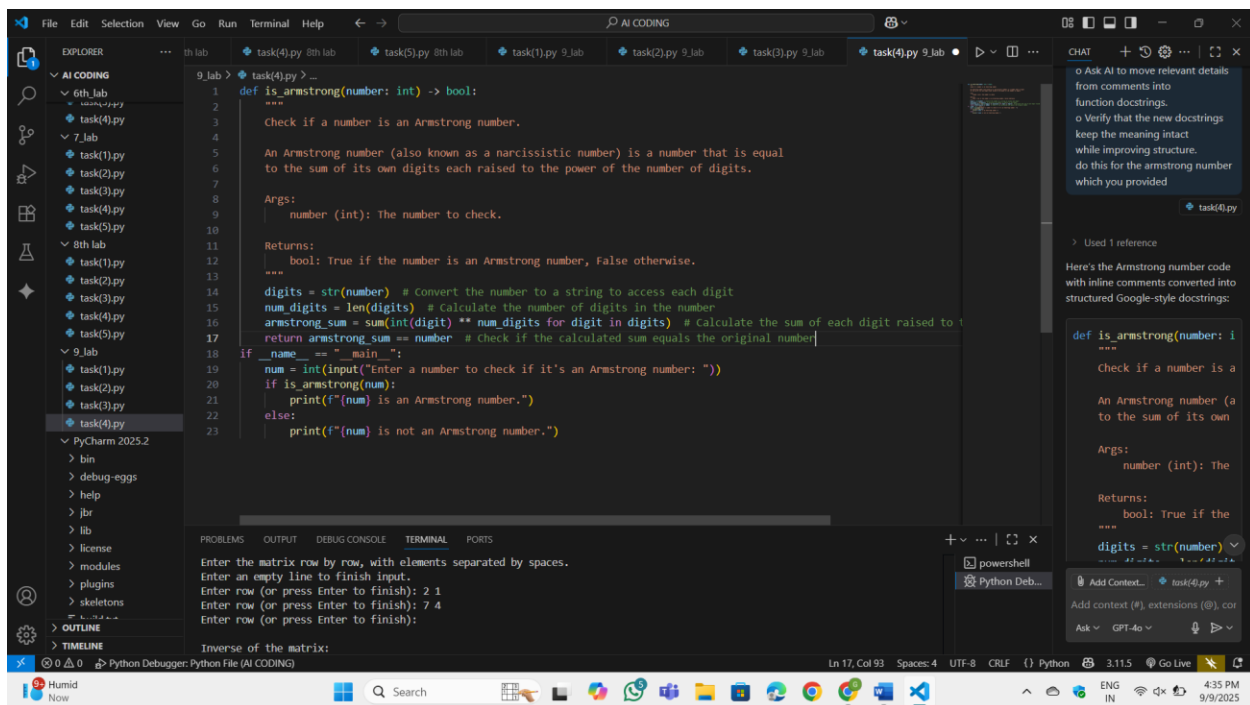
OUTPUT:

OBSERVATION:

Removed inline comments from the code. Added a detailed docstring to the is_armstrong function. The docstring explains: **Purpose**: What the function does. **Args**: The input parameter and its type. **Returns**: The return value and its type. **Logic**: A brief explanation of the Armstrong number concept. The docstring improves the structure and readability of the code while keeping the meaning intact

Task-5:

(Documentation – Review and Correct
Docstrings)
• Task: Use AI to identify and correct inaccuracies in existing docstrings.
• Instructions:
o Provide Python code with outdated or incorrect docstrings.
o Instruct AI to rewrite each docstring to match the current code behavior.
o Ensure corrections follow Google-style formatting.
• Expected Output #5:
o Python file with updated, accurate, and standardized docstrings

Prompt:

Identify and correct inaccuracies in existing docstrings.

Code:

```python
def square(num: int) -> int:
    """
    Returns the cube of a number.

    Args:
        num (int): A number to be cubed.

    Returns:
        int: The cube of the number.
    """
    return num * num
```



```python
def square(num: int) -> int:
    """
    Returns the square of a number.

    Args:
        num (int): A number to be squared.

    Returns:
        int: The square of the number.

    Example:
        >>> square(4)
    """
    return num * num
```

OUTPUT:

OBSERVATION:

The main issue is docstring drift—the code changes but the documentation doesn't. Correcting the docstrings to Google style makes the functions clearer, accurate, and easier to maintain

Task-6:
(Documentation – Prompt Comparison
Experiment)

• Task: Compare documentation output from a vague prompt and a detailed prompt for the same Python function.
• Instructions:
o Create two prompts: one simple ("Add comments to this function") and one detailed ("Add Google-style docstrings with parameters, return types, and examples").
o Use AI to process the same Python function with both prompts.
o Analyze and record differences in quality, accuracy, and completeness.
• Expected Output #6:
o A comparison table showing the results from both prompts with observations

Prompt:

Compare documentation output from a vague prompt and a detailed prompt for the same Python function. Create two prompts: one simple ("Add comments to this function") and one detailed ("Add Google-style docstrings with parameters, return types, and examples").

Code:
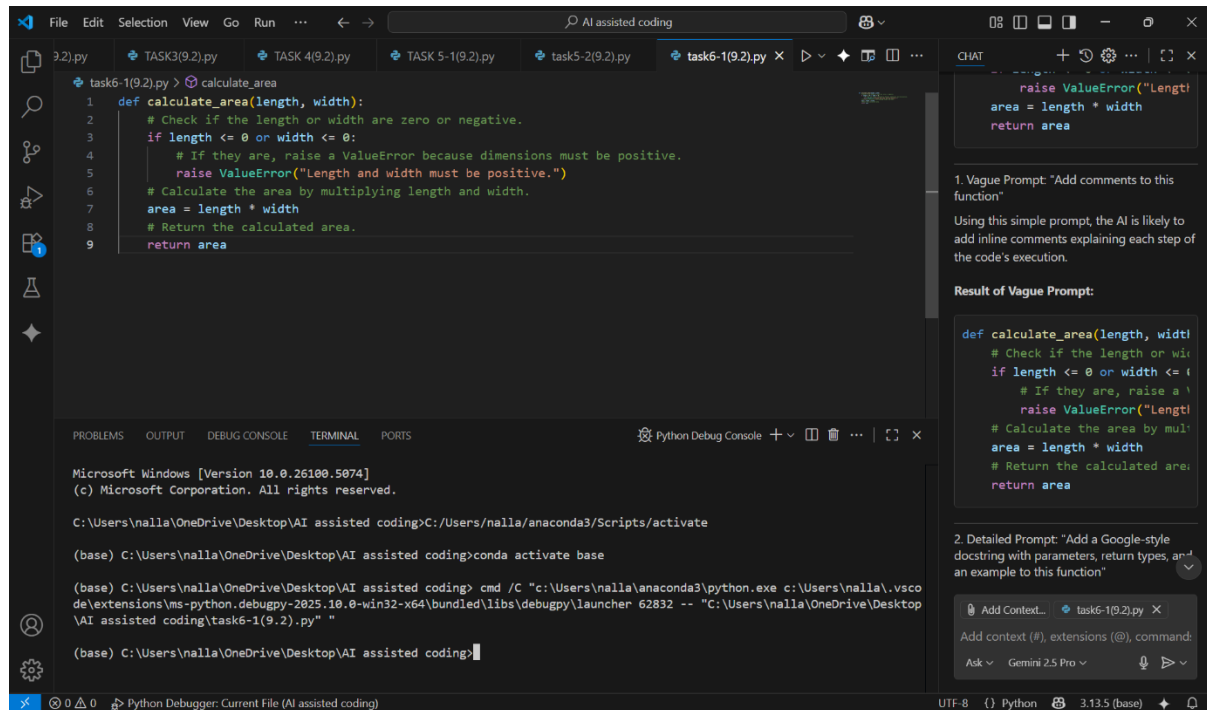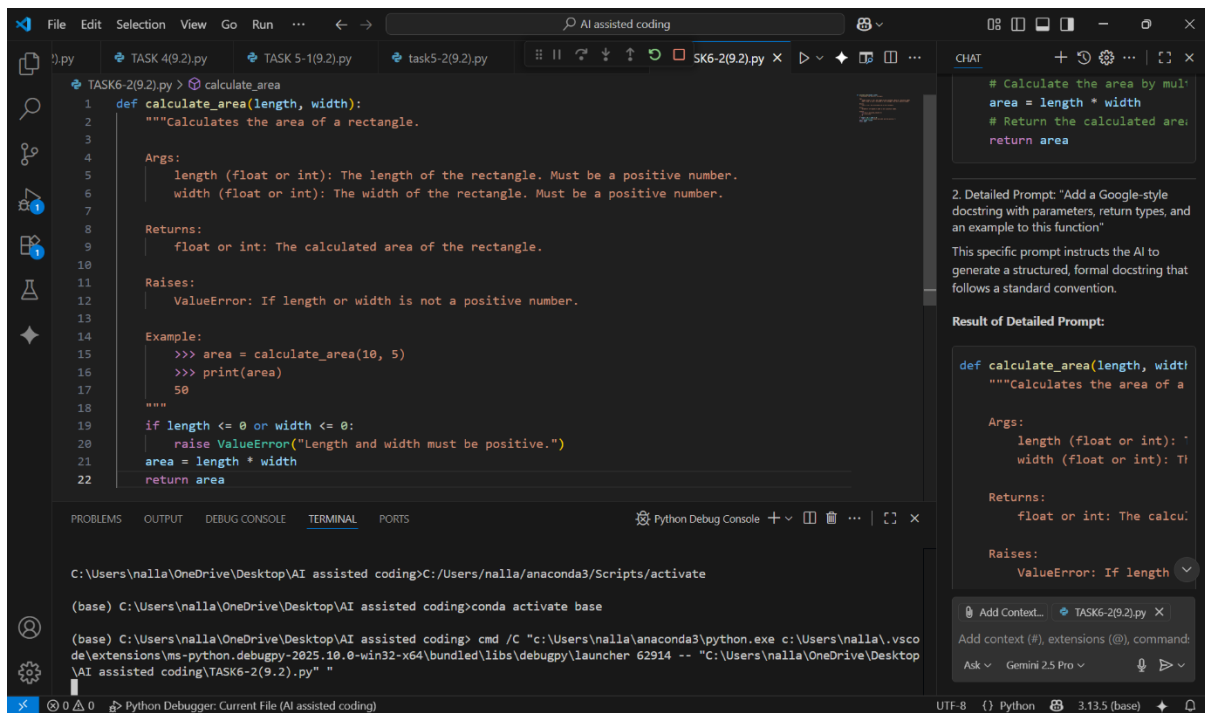
Observation:

A detailed and specific prompt yields a vastly superior documentation result. It moves beyond simple line-by-line explanations to create structured, comprehensive, and professional documentation that significantly improves code maintainability and usability.