



Introduction of ER Model

Last Updated : 30 Aug, 2024

Peter Chen developed the ER diagram in 1976. The ER model was created to provide a simple and understandable model for representing the structure and logic of databases. It has since evolved into variations such as the Enhanced ER Model and the Object Relationship Model.

The Entity Relational Model is a model for identifying entities to be represented in the database and representation of how those entities are related. The ER data model specifies enterprise schema that represents the overall logical structure of a database graphically.

The Entity Relationship Diagram explains the relationship among the entities present in the database. ER models are used to model real-world objects like a person, a car, or a company and the relation between these real-world objects. In short, the ER Diagram is the structural format of the database.

Why Use ER Diagrams In DBMS?

- ER diagrams represent the E-R model in a database, making them easy to convert into relations (tables).
- ER diagrams provide the purpose of real-world modeling of objects which makes them intently useful.
- ER diagrams require no technical knowledge and no hardware support.
- These diagrams are very easy to understand and easy to create even for a naive user.
- It gives a standard solution for visualizing the data logically.

A solid grasp of the ER Model is crucial for excelling in exams like GATE, where database management is a key topic. To enhance your understanding and boost your exam preparation, consider the [GATE CS Self-Paced Course](#). This course offers in-depth coverage of the ER Model and other essential database concepts, helping you build the knowledge needed to succeed in your exams.

Symbols Used in ER Model

ER Model is used to model the logical view of the system from a data perspective which consists of these symbols:


- **Rectangles:** Rectangles represent Entities in the ER Model.
- **Ellipses:** Ellipses represent Attributes in the ER Model.
- **Diamond:** Diamonds represent Relationships among Entities.
- **Lines:** Lines represent attributes to entities and entity sets with other relationship types.
- **Double Ellipse:** Double Ellipses represent Multi-Valued Attributes.
- **Double Rectangle:** Double Rectangle represents a Weak Entity.
-

Figures	Symbols	Represents
Rectangle		Entities in ER Model
Ellipse		Attributes in ER Model
Diamond		Relationships among Entities
Line		Attributes to Entities and Entity Sets with Other Relationship Types
Double Ellipse		Multi-Valued Attributes
Double Rectangle		Weak Entity

Symbols used in ER Diagram

Components of ER Diagram

ER Model consists of Entities, Attributes, and Relationships among Entities in a Database System.

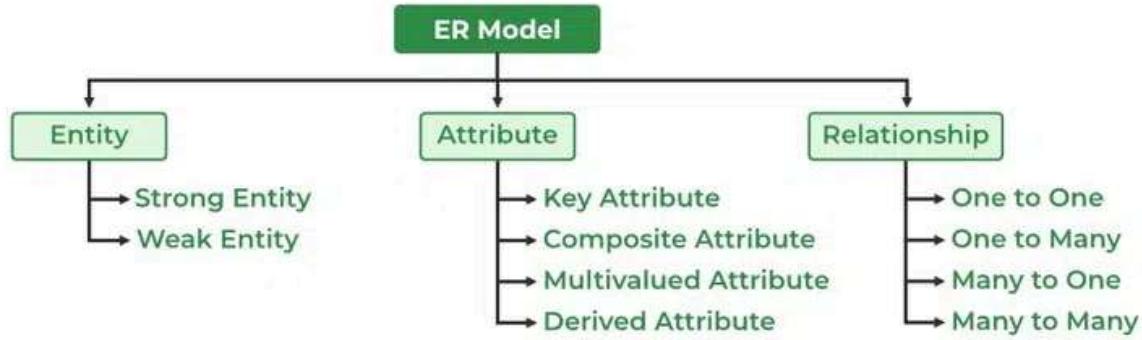
*Components of ER Diagram*

What is Entity?

An Entity may be an object with a physical existence – a particular person, car, house, or employee – or it may be an object with a conceptual existence – a company, a job, or a university course.

What is Entity Set?

An Entity is an object of Entity Type and a set of all entities is called an entity set. For Example, E1 is an entity having Entity Type Student and the set of all students is called Entity Set. In ER diagram, Entity Type is represented as:

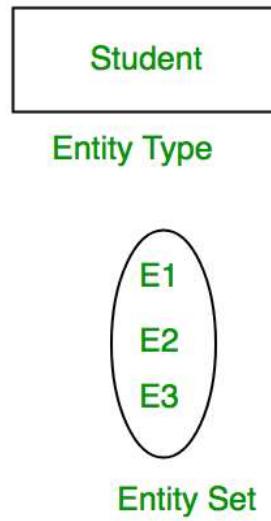*Entity Set*

We can represent the entity set in ER Diagram but can't represent entity in ER Diagram because entity is row and column in the relation and ER Diagram is graphical representation of data.

Types of Entity

There are two types of entity:

1. Strong Entity


A Strong Entity is a type of entity that has a key Attribute. Strong Entity does not depend on other Entity in the Schema. It has a primary key, that helps in identifying it uniquely, and it is represented by a rectangle. These are called Strong Entity Types.

2. Weak Entity

An Entity type has a key attribute that uniquely identifies each entity in the entity set. But some entity type exists for which key attributes can't be defined. These are called Weak Entity types.

For Example, A company may store the information of dependents (Parents, Children, Spouse) of an Employee. But the dependents can't exist without the employee. So Dependent will be a **Weak Entity Type** and Employee will be Identifying Entity type for Dependent, which means it is **Strong Entity Type**.

A weak entity type is represented by a Double Rectangle. The participation of weak entity types is always total. The relationship between the weak entity type and its identifying strong entity type is called identifying relationship and it is represented by a double diamond.

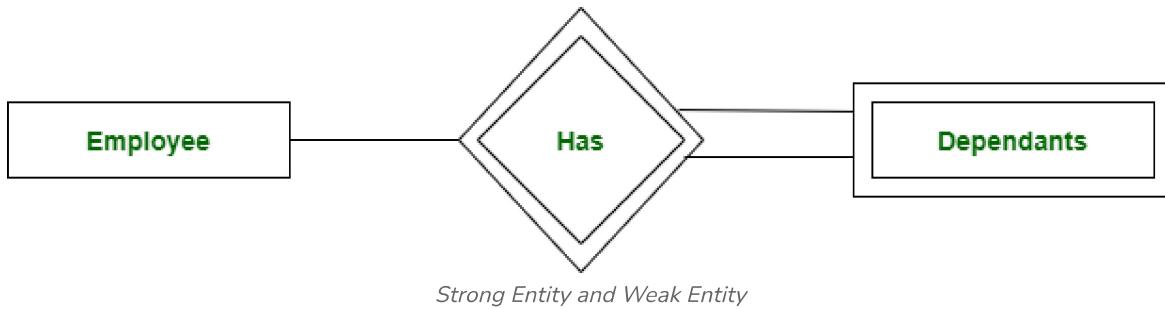

What is Attributes?

Attributes are the properties that define the entity type. For example, Roll_No, Name, DOB, Age, Address, and Mobile_No are the attributes that define entity type Student. In ER diagram, the attribute is represented by an oval.

*Attribute*

Types of Attributes


1. Key Attribute

The attribute which **uniquely identifies each entity** in the entity set is called the key attribute. For example, Roll_No will be unique for each student. In ER diagram, the key attribute is represented by an oval with underlying lines.

*Key Attribute*

2. Composite Attribute

An attribute **composed of many other attributes** is called a composite attribute. For example, the Address attribute of the student Entity type consists of Street, City, State, and Country. In ER diagram, the composite attribute is represented by an oval comprising of ovals.

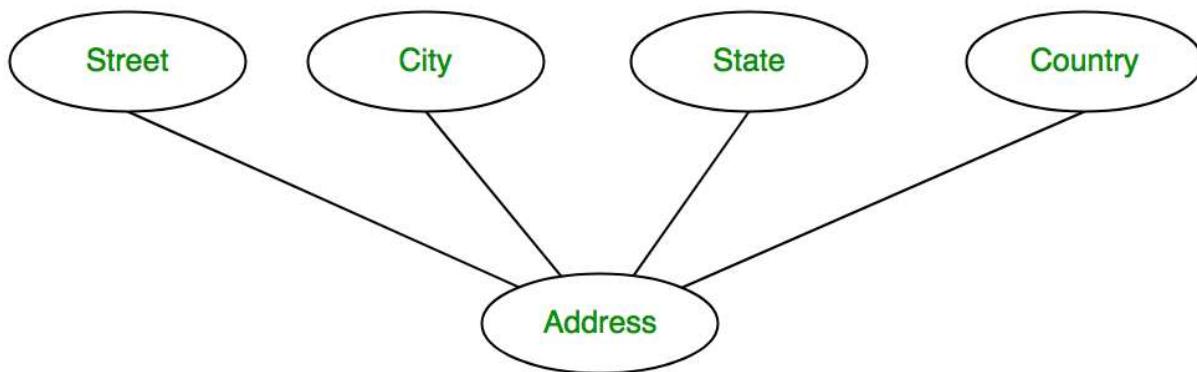*Composite Attribute*

3. Multivalued Attribute

An attribute consisting of more than one value for a given entity. For example, Phone_No (can be more than one for a given student). In ER diagram, a multivalued attribute is represented by a double oval.



Multivalued Attribute


4. Derived Attribute

An attribute that can be derived from other attributes of the entity type is known as a derived attribute. e.g.; Age (can be derived from DOB). In ER diagram, the derived attribute is represented by a dashed oval.




Derived Attribute

The Complete Entity Type Student with its Attributes can be represented as:

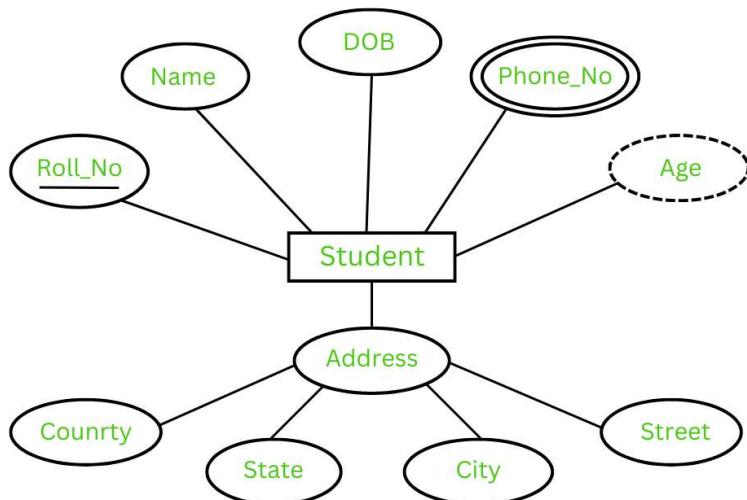


Relationship Type and Relationship Set

A Relationship Type represents the association between entity types. For example, 'Enrolled in' is a relationship type that exists between entity type Student and Course. In ER diagram, the relationship type is represented by a diamond and connecting the entities with lines.

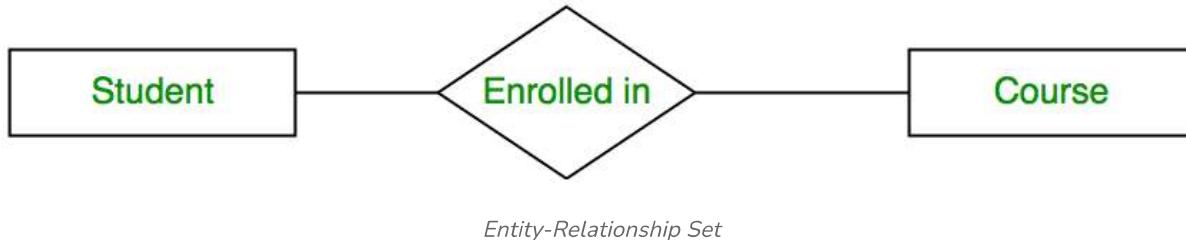


A set of relationships of the same type is known as a relationship set. The following relationship set depicts S1 as enrolled in C2, S2 as enrolled in C1, and S3 as registered in C3.

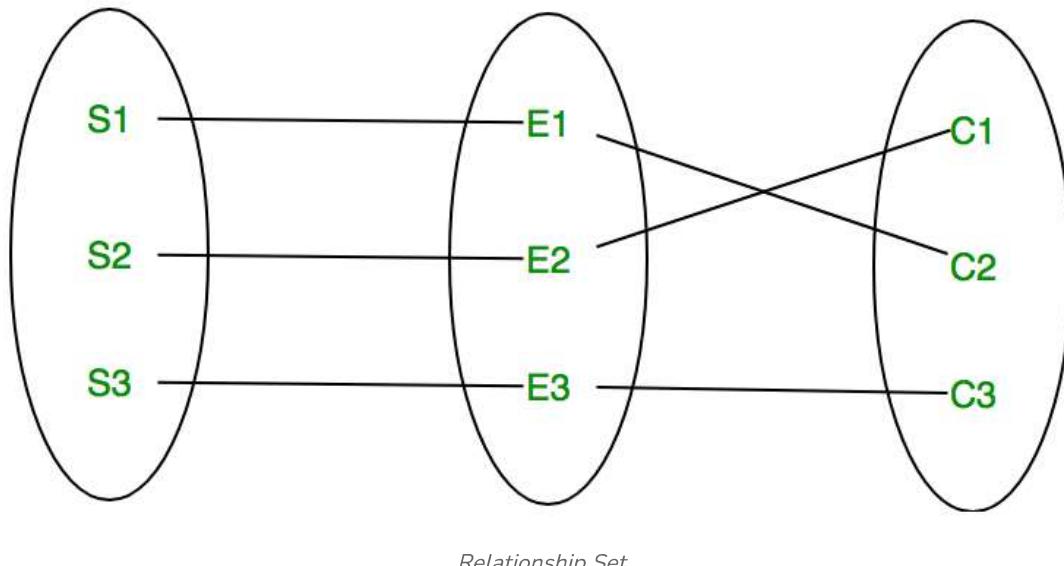


Degree of a Relationship Set

The number of different entity sets participating in a relationship set is called the [degree of a relationship set](#).

1. Unary Relationship: When there is only ONE entity set participating in a relation, the relationship is called a unary relationship. For example, one person is married to only one person.

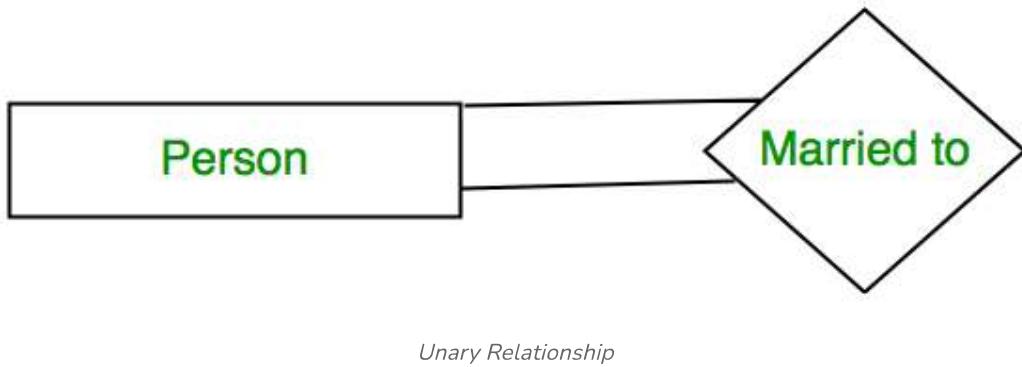

2. Binary Relationship: When there are TWO entities set participating in a relationship, the relationship is called a binary relationship. For example, a Student is enrolled in a Course.

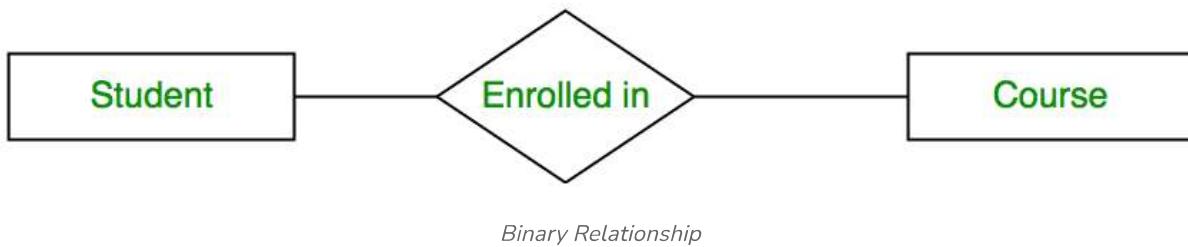

3. Ternary Relationship: When there are three entity sets participating in a relationship, the relationship is called a ternary relationship.


4. N-ary Relationship: When there are n entities set participating in a relationship, the relationship is called an n-ary relationship.

What is Cardinality?

The number of times an entity of an entity set participates in a relationship set is known as cardinality. Cardinality can be of different types:


1. One-to-One: When each entity in each entity set can take part only once in the relationship, the cardinality is one-to-one. Let us assume that a male can marry one female and a female can marry one male. So the relationship will be one-to-one.

the total number of tables that can be used in this is 2.

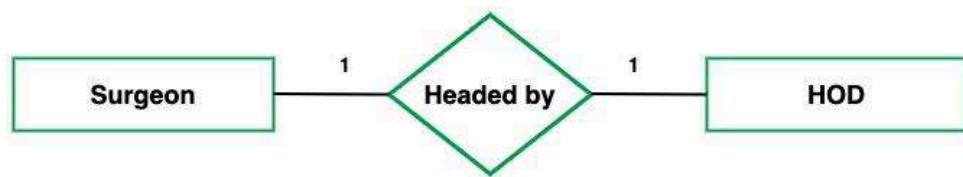

one to one cardinality


Using Sets, it can be represented as:

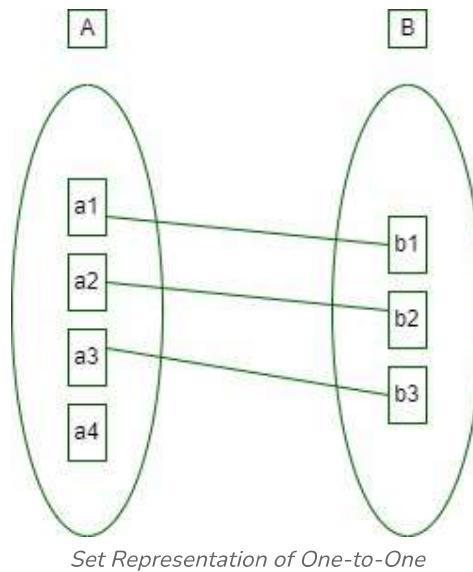

Set Representation of One-to-One


2. One-to-Many: In one-to-many mapping as well where each entity can be related to more than one entity and the total number of tables that can be used in this is 2. Let us assume that one surgeon department can accommodate many doctors. So the Cardinality will be 1 to M. It means one department has many Doctors.

total number of tables that can be used is 3.

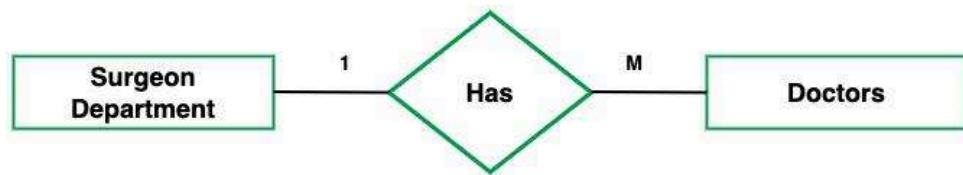

one to many cardinality


Using sets, one-to-many cardinality can be represented as:

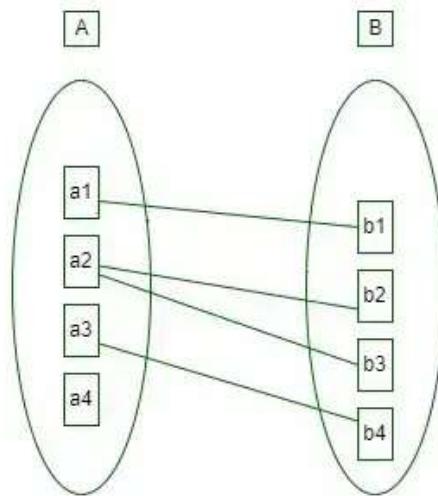

Set Representation of One-to-Many


3. Many-to-One: When entities in one entity set can take part only once in the relationship set and entities in other entity sets can take part more than once in the relationship set, cardinality is many to one. Let us assume that a student can take only one course but one course can be taken by many students. So the cardinality will be n to 1. It means that for one course there can be n students but for one student, there will be only one course.

The total number of tables that can be used in this is 3.

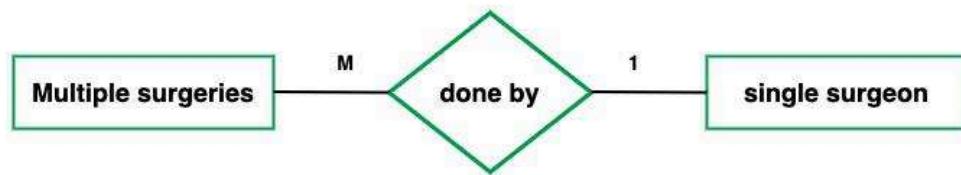

many to one cardinality


Using Sets, it can be represented as:

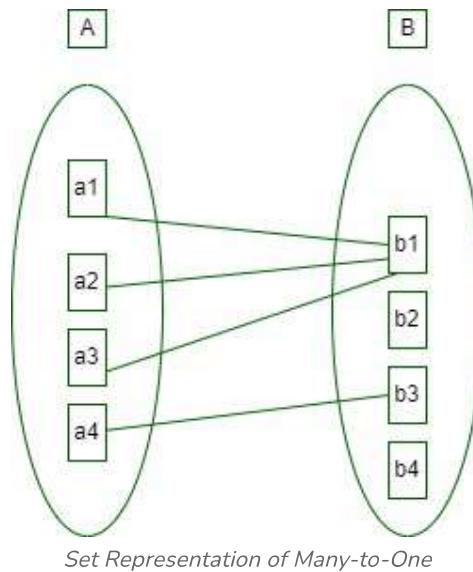

In this case, each student is taking only 1 course but 1 course has been taken by many students.


4. Many-to-Many: When entities in all entity sets can take part more than once in the relationship cardinality is many to many. Let us assume that a student can take more than one course and one course can be taken by many students. So the relationship will be many to many.

the total number of tables that can be used in this is 3.

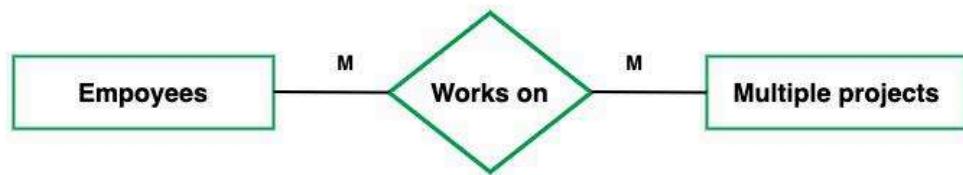

many to many cardinality

Using Sets, it can be represented as:

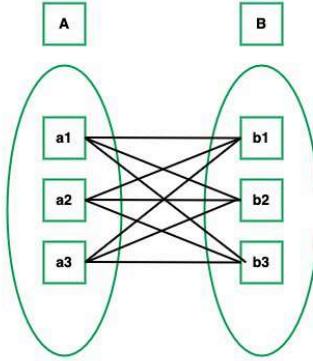

Many-to-Many Set Representation

In this example, student S1 is enrolled in C1 and C3 and Course C3 is enrolled by S1, S3, and S4. So it is many-to-many relationships.

Participation Constraint


Participation Constraint is applied to the entity participating in the relationship set.

1. Total Participation – Each entity in the entity set must participate in the relationship. If each student must enroll in a course, the participation of students will be total. Total participation is shown by a double line in the ER diagram.

2. Partial Participation – The entity in the entity set may or may NOT participate in the relationship. If some courses are not enrolled by any of the


students, the participation in the course will be partial.

The diagram depicts the ‘Enrolled in’ relationship set with Student Entity set having total participation and Course Entity set having partial participation.

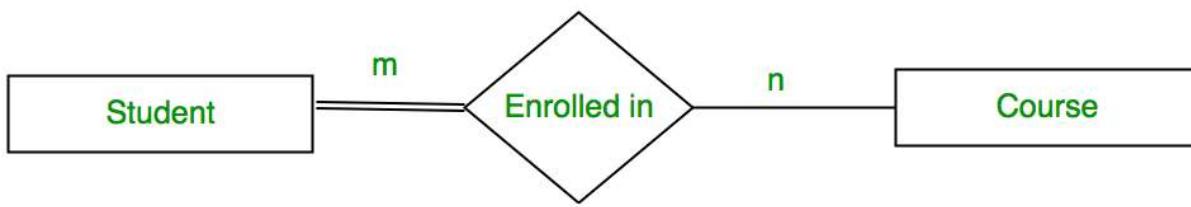

Total Participation and Partial Participation

Using Set, it can be represented as,

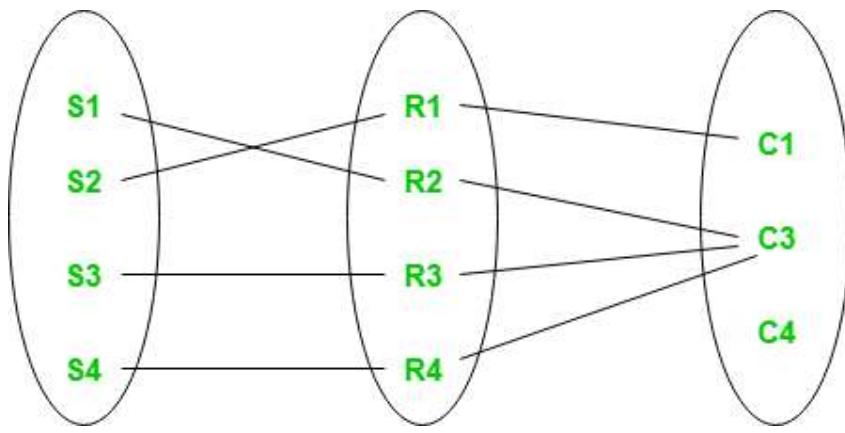

Set representation of Total Participation and Partial Participation

Every student in the Student Entity set participates in a relationship but there exists a course C4 that is not taking part in the relationship.

How to Draw ER Diagram?

- The very first step is Identifying all the Entities, and place them in a Rectangle, and labeling them accordingly.
- The next step is to identify the relationship between them and place them accordingly using the Diamond, and make sure that, Relationships are not connected to each other.
- Attach attributes to the entities properly.
- Remove redundant entities and relationships.
- Add proper colors to highlight the data present in the database.

Conclusion

An Entity-Relationship (ER) model is a way to visually represent the structure of a database. It shows how different entities (like objects or concepts) are connected and interact with each other through relationships. The model uses diagrams to represent entities as rectangles and relationships as diamonds, making it easier to design and understand [databases](#).

Frequently Asked Questions on ER Model – FAQs

What is the main purpose of an ER Diagram?

ER Diagrams are used to visually represent the structure of a database, showing entities, their attributes, and relationships between them.

How do ER Diagrams help in database design?

They simplify the process of mapping out the database structure, making it easier to organize data and understand how different entities interact.

What is the difference between a Weak Entity and a Strong Entity?

A Strong Entity has a unique identifier or primary key, while a Weak Entity lacks a primary key and relies on a Strong Entity for identification.

Can ER Diagrams represent complex data relationships?

Yes, ER Diagrams can model complex relationships, including one-to-one, one-to-many, and many-to-many relationships.

Why are Participation Constraints used in ER Diagrams?

Participation Constraints indicate whether all entities must participate in a relationship or if only some may do so, helping to accurately represent real-world scenarios.

Reference

- [What is Normalization in DBMS?](#)
- [SQL Concepts and Queries](#)
- [Data Modeling: A Comprehensive Guide for Analysts](#)
- [Best Practices For Documenting Database Design](#)

Are you a student in Computer Science or an employed professional looking to take up the **GATE 2025 Exam**? Of course, you can get a good score in it but to get the best score our [GATE CS/IT 2025 - Self-Paced Course](#) is available on GeeksforGeeks to help you with its preparation. Get comprehensive coverage of **all topics of GATE**, detailed explanations, and **practice questions** for study. Study at your pace. Flexible and easy-to-follow modules. Do well in GATE to enhance the prospects of your career. Enroll now and let your journey to success begin!



GeeksforGeeks




647

Previous Article

Difference between File System and
DBMS

Next Article

Structural Constraints of Relationships in
ER Model

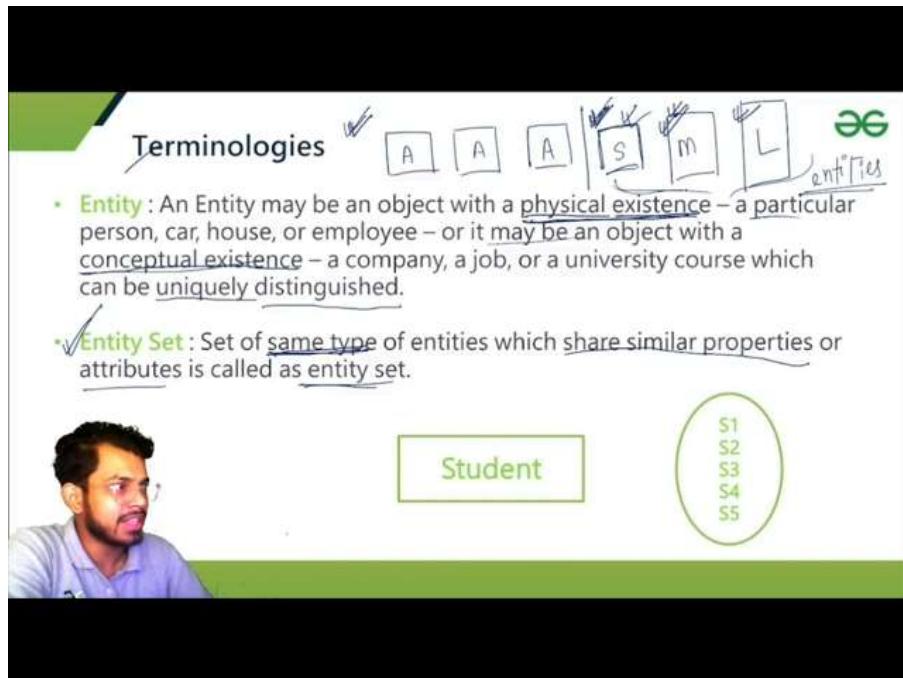

Video | 18. Intro to ER Model in DBMS

[Visit Course](#)

Similar Reads

Difference between Bottom-Up Model and Top-Down Model

Top-Down Design Model: In the top-down model, an overview of the system is formulated without going into detail for any part of it. Each part of it then refine...

3 min read

Similarities between TCP/IP model and OSI model

Pre-Requisite: Layers of OSI Model, TCP/IP Model OSI Model or Open Systems Interconnection is an architecture of 7 layers in which each layer has its work to...

5 min read

ACID Model vs BASE Model For Database

The difference between ACID and BASE database models is the way they deal with this limitation. The ACID model provides a consistent system. The BASE...

5 min read

This is exactly why we still use the OSI model when we have TCP/IP Model

What is the OSI Model? OSI is an acronym for Open Systems Interconnection. The International Organization for Standardization (ISO) created the OSI model (ISO)...

10 min read

What is OSI Model? - Layers of OSI Model

OSI stands for Open Systems Interconnection , where open stands to say non-proprietary. It is a 7-layer architecture with each layer having specific functional...

15+ min read

Difference between Relational model and Document Model

The relational model organizes data into tables with rows and columns, ideal for structured data. On the other hand, the document model stores data in...

3 min read

Mapping from ER Model to Relational Model

Converting an Entity-Relationship (ER) diagram to a Relational Model is a crucial step in database design. The ER model represents the conceptual structure of a...

7 min read

Difference between E-R Model and Relational Model in DBMS

In database management systems (DBMS), two key methods are the Relational model and the Entity-Relationship (E-R) model. Each has a specific function in t...

4 min read

Introduction of Relational Model and Codd Rules in DBMS

It proposes a relational database model developed by Dr. E.F. Codd, wherein data is presented in tabular form using the concept of relations; that is, two-...

14 min read

Attributes to Relationships in ER Model

In ER model, entities have attributes which can be of various types like single-valued, multi-valued, composite, simple, stored, derived and complex. But...

2 min read

Two State Process Model in Operating System

Pre-requisite: States of a Process in Operating Systems The process in an operating system passes from different states starting from its formation to its...

3 min read

Building blocks of a Data Model

A data model is a structure of the data that contains all the required details of the data like the name of the data, size of the data, relationship with other data and...

2 min read

Difference between ER Model and RDBMS

1. ER (Entity- Relationship) Model : ER model stands for entity relationship model. It specifies the structure of a database by giving the relationship between...

2 min read

Relationships in ER model

Entity Relationship model (ER model) contains entities and relationships. ER model enables us to know how these entities are associated with each other....

2 min read

Data Model In Neo4j

The data model in Neo4j organizes data using the concepts of nodes and relationships. Both nodes and relationships can have properties, which store the...

3 min read

Record-Based Data Model

Data Model is the model that organizes elements of the data and tell how they relate to one-another and with the properties of real-world entities. The basic...

2 min read

Model Planning for Data Analytics

In this article, we are going to discuss model planning for data analytics in which we will cover all procedural steps one by one. Model planning is phase 3 of...

3 min read

A key-value data model or database is also referred to as a key-value store. It is a non-relational type of database. In this, an associative array is used as a basic...

3 min read

Basic Object Oriented Data Model

Need of Object Oriented Data Model : To represent the complex real world problems there was a need for a data model that is closely related to real world....

2 min read

How Communication happens using OSI model

The Open System Interconnection (OSI) model is a standard “reference model” created by an International Organization for Standardization (ISO) to describe...

4 min read

Article Tags : DBMS GATE CS DBMS-ER model



Corporate & Communications Address:- A-143, 9th Floor, Sovereign Corporate Tower, Sector- 136, Noida, Uttar Pradesh (201305)
| Registered Address:- K 061, Tower K, Gulshan Vivante Apartment, Sector 137, Noida, Gautam Buddh Nagar, Uttar Pradesh, 201305



Company

- [About Us](#)
- [Legal](#)
- [Careers](#)
- [In Media](#)
- [Contact Us](#)
- [Advertise with us](#)
- [GFG Corporate Solution](#)
- [Placement Training Program](#)

Explore

- [Job-A-Thon Hiring Challenge](#)
- [Hack-A-Thon](#)
- [GfG Weekly Contest](#)
- [Offline Classes \(Delhi/NCR\)](#)
- [DSA in JAVA/C++](#)
- [Master System Design](#)
- [Master CP](#)
- [GeeksforGeeks Videos](#)
- [Geeks Community](#)

Languages

- [Python](#)
- [Java](#)
- [C++](#)
- [PHP](#)
- [GoLang](#)
- [SQL](#)
- [R Language](#)
- [Android Tutorial](#)

DSA

- [Data Structures](#)
- [Algorithms](#)
- [DSA for Beginners](#)
- [Basic DSA Problems](#)
- [DSA Roadmap](#)
- [DSA Interview Questions](#)
- [Competitive Programming](#)

Data Science & ML

- [Data Science With Python](#)
- [Data Science For Beginner](#)
- [Machine Learning](#)
- [ML Maths](#)
- [Data Visualisation](#)
- [Pandas](#)
- [NumPy](#)
- [NLP](#)
- [Deep Learning](#)

Web Technologies

- [HTML](#)
- [CSS](#)
- [JavaScript](#)
- [TypeScript](#)
- [ReactJS](#)
- [NextJS](#)
- [NodeJS](#)
- [Bootstrap](#)
- [Tailwind CSS](#)

Python Tutorial

- [Python Programming Examples](#)
- [Django Tutorial](#)
- [Python Projects](#)
- [Python Tkinter](#)
- [Web Scraping](#)
- [OpenCV Tutorial](#)
- [Python Interview Question](#)

Computer Science

- [GATE CS Notes](#)
- [Operating Systems](#)
- [Computer Network](#)
- [Database Management System](#)
- [Software Engineering](#)
- [Digital Logic Design](#)
- [Engineering Maths](#)

DevOps

- [Git](#)
- [AWS](#)
- [Docker](#)

System Design

- [High Level Design](#)
- [Low Level Design](#)
- [UML Diagrams](#)

Kubernetes	Interview Guide
Azure	Design Patterns
GCP	OOAD
DevOps Roadmap	System Design Bootcamp
	Interview Questions

School Subjects

Mathematics
Physics
Chemistry
Biology
Social Science
English Grammar

Commerce

Accountancy
Business Studies
Economics
Management
HR Management
Finance
Income Tax

Databases

SQL
MySQL
PostgreSQL
PL/SQL
MongoDB

Preparation Corner

Company-Wise Recruitment Process
Resume Templates
Aptitude Preparation
Puzzles
Company-Wise Preparation
Companies
Colleges

Competitive Exams

JEE Advanced
UGC NET
UPSC
SSC CGL
SBI PO
SBI Clerk
IBPS PO
IBPS Clerk

More Tutorials

Software Development
Software Testing
Product Management
Project Management
Linux
Excel
All Cheat Sheets
Recent Articles

Free Online Tools

Typing Test
Image Editor
Code Formatters
Code Converters
Currency Converter
Random Number Generator
Random Password Generator

Write & Earn

Write an Article
Improve an Article
Pick Topics to Write
Share your Experiences
Internships