Lab#11 Design Navigation bar with dropdown using Tailwind CSS.

Code snippet:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <title>Navbar with Dropdown</title>
  <script src="https://cdn.tailwindcss.com"></script>
</head>
<body class="bg-gray-100">

  <!-- Navbar -->
  <nav class="bg-white shadow-md">
    <div class="max-w-7xl mx-auto px-4">
      <div class="flex justify-between items-center h-16">

        <!-- Logo -->
        <div class="text-xl font-bold text-blue-600">
          MyLogo
        </div>

        <!-- Desktop Menu -->
```

```
<div class="hidden md:flex space-x-6 items-center">

 <a href="#" class="text-gray-700 hover:text-blue-600">Home</a>

 <!-- Dropdown -->
 <div class="relative group">
  <button class="text-gray-700 hover:text-blue-600 flex items-center">
   Services
   <svg class="w-4 h-4 ml-1" fill="none" stroke="currentColor" viewBox="0 0 24
24">
    <path stroke-linecap="round" stroke-linejoin="round" stroke-width="2"
     d="M19 9l-7 7-7-7" />
   </svg>
  </button>

  <!-- Dropdown Menu -->
  <div class="absolute left-0 mt-2 w-40 bg-white border rounded-md shadow-lg
        opacity-0 invisible group-hover:opacity-100 group-hover:visible
        transition duration-200">

   <a href="#" class="block px-4 py-2 hover:bg-gray-100">Web Design</a>
   <a href="#" class="block px-4 py-2 hover:bg-gray-100">SEO</a>
   <a href="#" class="block px-4 py-2 hover:bg-gray-100">Marketing</a>

  </div>
 </div>
```

```
    <a href="#" class="text-gray-700 hover:text-blue-600">About</a>
    <a href="#" class="text-gray-700 hover:text-blue-600">Contact</a>

   </div>

   <!-- Mobile Button -->
   <div class="md:hidden">
    <button id="menu-btn" class="text-gray-700 focus:outline-none">
     ☰
    </button>
   </div>

  </div>
 </div>

 <!-- Mobile Menu -->
 <div id="mobile-menu" class="hidden md:hidden px-4 pb-4">
  <a href="#" class="block py-2">Home</a>

  <!-- Mobile Dropdown -->
  <div>
   <button id="dropdown-btn" class="w-full text-left py-2">
    Services ▼
   </button>
   <div id="dropdown-menu" class="hidden pl-4">
    <a href="#" class="block py-1">Web Design</a>
```

```
      <a href="#" class="block py-1">SEO</a>
      <a href="#" class="block py-1">Marketing</a>
     </div>
    </div>

    <a href="#" class="block py-2">About</a>
    <a href="#" class="block py-2">Contact</a>
   </div>
  </nav>

  <!-- Script -->
  <script>
   const menuBtn = document.getElementById('menu-btn');
   const mobileMenu = document.getElementById('mobile-menu');
   const dropdownBtn = document.getElementById('dropdown-btn');
   const dropdownMenu = document.getElementById('dropdown-menu');

   menuBtn.addEventListener('click', () => {
    mobileMenu.classList.toggle('hidden');
   });

   dropdownBtn.addEventListener('click', () => {
    dropdownMenu.classList.toggle('hidden');
   });
  </script>
```

```
</body>

</html>
```
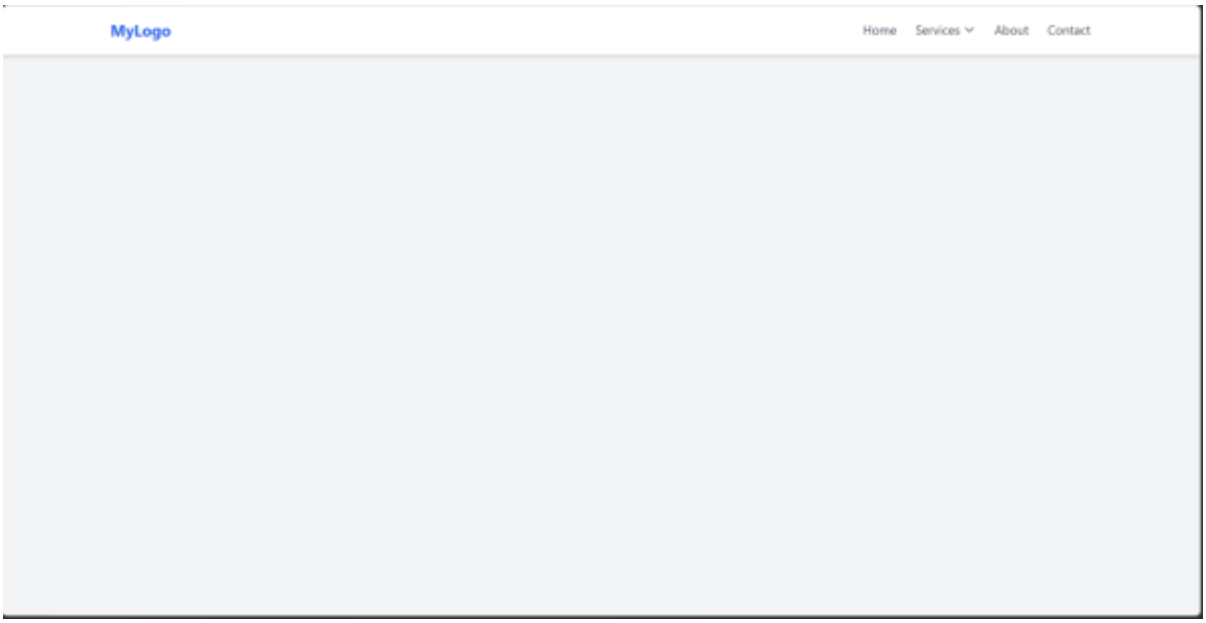
Source outcome: