

JENKINS-03

1. Create one Jenkins job using the below code and create three stages.

- **stage1: Git clone to download the source code.**
- **stage2: Sonarqube Integration to check the quality of code.**
- **stage3: Slack Integration to send the alerts to slack.**

Source Code: <https://github.com/betawins/VProfile-1.git>

Stage1: Git clone to download the source code.

Go to Jenkins → create a build

Jenkins / All / New Item

New Item

Enter an item name

v-profile

Select an item type

- Pipeline
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.
- Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

OK

Jenkins / build / Configure

Configure

- General
- Source Code Management
- Triggers
- Environment
- Build Steps
- Post-build Actions

General

Enabled


Description

simple app

Plain text [Preview](#)


- ☐ Discard old builds ?
- ☐ GitHub project
- ☐ This project is parameterized ?
- ☐ Throttle builds ?

Choose git and provide the url that we want to clone

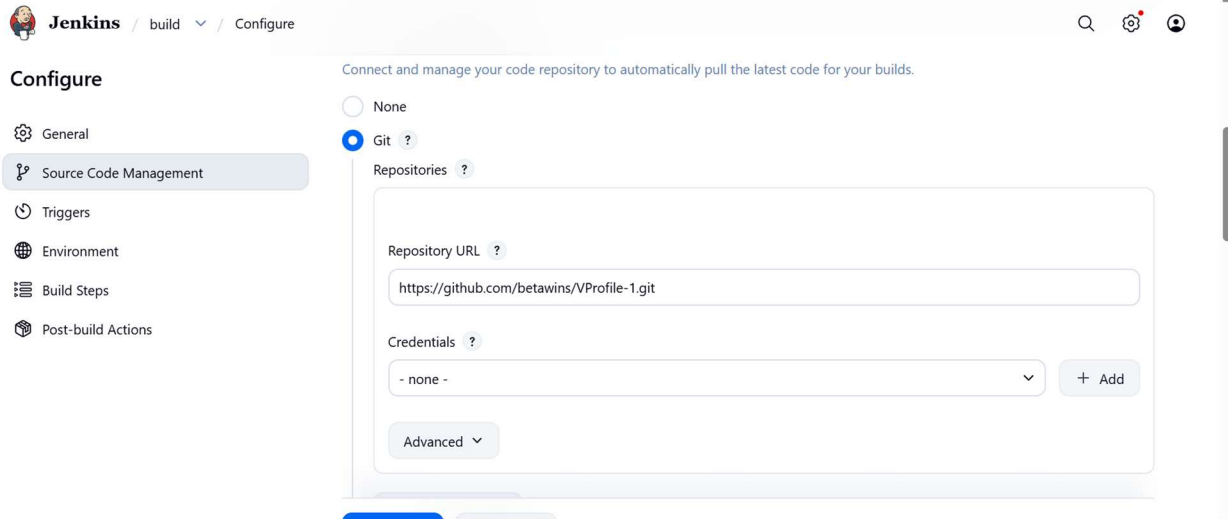


The screenshot shows the Jenkins 'Configure' page for a project. The left sidebar contains a 'Configure' section with a list of options: General, Source Code Management (selected), Triggers, Environment, Build Steps, and Post-build Actions. The main content area is titled 'Configure' and has a subtitle 'Connect and manage your code repository to automatically pull the latest code for your builds.' There are two radio buttons: 'None' and 'Git' (selected). Below the 'Git' button is a 'Repositories' section with a 'Repository URL' field containing 'https://github.com/betawins/VProfile-1.git'. There is also a 'Credentials' dropdown menu set to '- none -' and an '+ Add' button. An 'Advanced' dropdown menu is visible at the bottom of the repository configuration area.

Click on build now

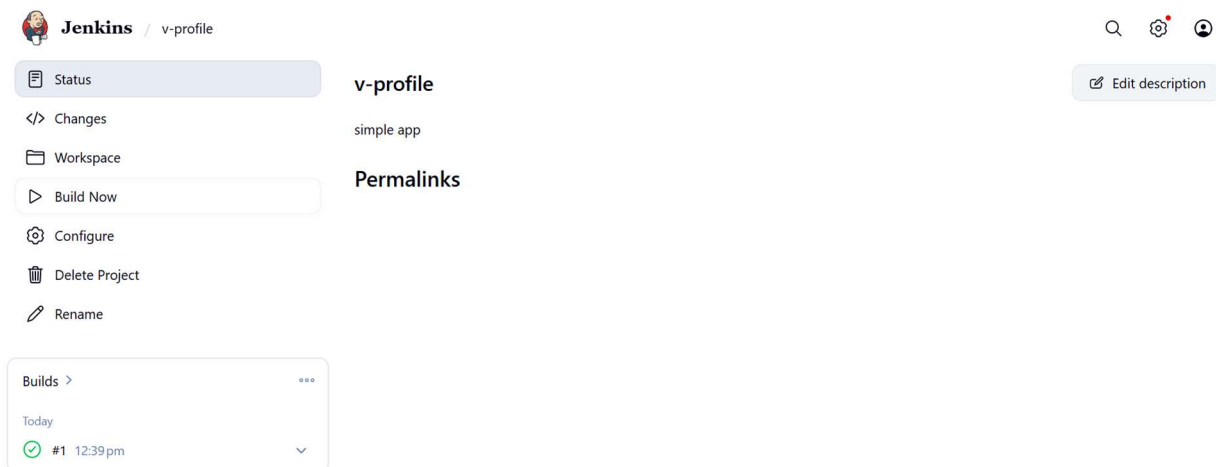

The screenshot shows the Jenkins 'v-profile' project page. The left sidebar contains a 'Status' section with a list of options: Status (selected), Changes, Workspace, Build Now, Configure, Delete Project, and Rename. The main content area is titled 'v-profile' and has a subtitle 'simple app'. There is a 'Permalinks' section. On the right, there is an 'Edit description' button. At the bottom, there is a 'Builds' section showing a list of builds. The first build is labeled '#1 12:39 pm' and has a green status icon.


Successfully cloned

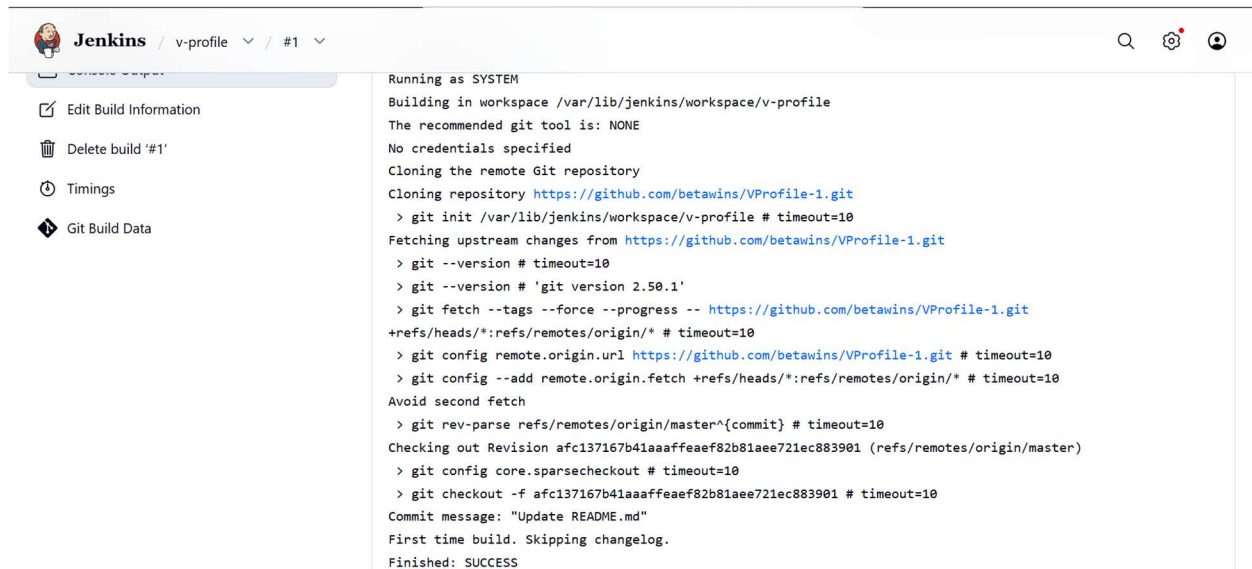

The screenshot shows the Jenkins web interface for a build named 'v-profile'. On the left, there is a sidebar with links: 'Edit Build Information', 'Delete build '#1'', 'Timings', and 'Git Build Data'. The main area displays the console output of the build, which is running as SYSTEM. The output shows the following steps:

```
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/v-profile
The recommended git tool is: NONE
No credentials specified
Cloning the remote Git repository
Cloning repository https://github.com/betawins/VProfile-1.git
> git init /var/lib/jenkins/workspace/v-profile # timeout=10
Fetching upstream changes from https://github.com/betawins/VProfile-1.git
> git --version # timeout=10
> git --version # 'git version 2.50.1'
> git fetch --tags --force --progress -- https://github.com/betawins/VProfile-1.git
+refs/heads/*:refs/remotes/origin/* # timeout=10
> git config remote.origin.url https://github.com/betawins/VProfile-1.git # timeout=10
> git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
> git rev-parse refs/remotes/origin/master^{commit} # timeout=10
Checking out Revision afc137167b41aaaffaeef82b81aee721ec883901 (refs/remotes/origin/master)
> git config core.sparsecheckout # timeout=10
> git checkout -f afc137167b41aaaffaeef82b81aee721ec883901 # timeout=10
Commit message: "Update README.md"
First time build. Skipping changelog.
Finished: SUCCESS
```

Here when we try to check in server to see the repository. It is cloned successfully

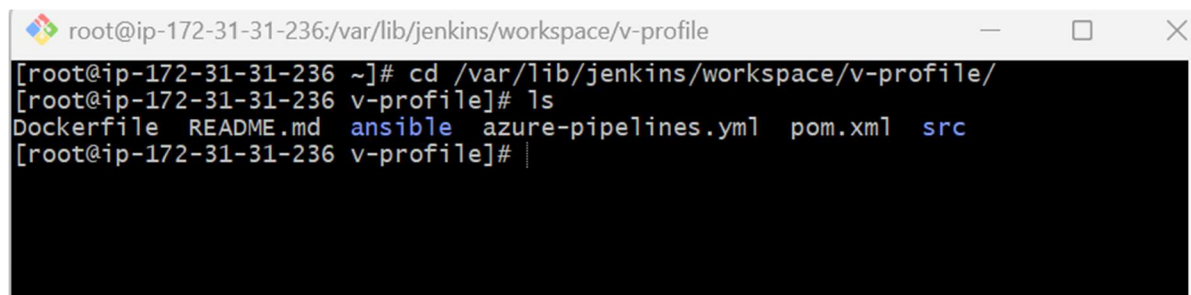

The screenshot shows a terminal window with the prompt 'root@ip-172-31-31-236:/var/lib/jenkins/workspace/v-profile'. The user has executed the following commands:

```
[root@ip-172-31-31-236 ~]# cd /var/lib/jenkins/workspace/v-profile/
[root@ip-172-31-31-236 v-profile]# ls
Dockerfile  README.md  ansible  azure-pipelines.yml  pom.xml  src
[root@ip-172-31-31-236 v-profile]#
```

stage2: Sonarqube Integration to check the quality of code.

To integrate sonarqube, we need to have sonarqube server

SonarQube : It will check the quality of code

Lets set up SonarQube server

aws

Search

[Alt+S]

United States (N. Virginia)

Manisha A (142083399660)

EC2

Instances

Launch an instance

Launch an instance Info

Amazon EC2 allows you to create virtual machines, or instances, that run on the AWS Cloud. Quickly get started by following the simple steps below.

Name and tags Info

Name

[Add additional tags](#)

Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

[Recents](#)
[Quick Start](#)

Summary

Number of instances Info

Software Image (AMI)
Amazon Linux 2023 AMI 2023.11....[read more](#)
ami-0cca150d127c2216f

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

[Cancel](#)
[Launch instance](#)
[Preview code](#)

aws

Search

[Alt+S]

United States (N. Virginia)

Manisha A (142083399660)

EC2

Instances

EC2

- Dashboard
- AWS Global View
- Events
- Instances

Instances (11) Info

Last updated less than a minute ago

[Connect](#)
[Instance state](#)
[Actions](#)
[Launch instances](#)

Saved filter sets
Choose filter set

☐	Name	Instance ID	Instance state	Instance type	Status check	Availability Zone
☐	Sonarqube-ser...	i-020d53c8ee919cecf	Running	c7i-flex.large	Initializing	us-east-1c

Prerequisites for SonarQube Server

- EC2 instance : c7i-flex-large
- Storage: At least 20 GB
- Java: Version 1.8 installed
- MySQL 5.7: Used to store generated reports

aws

Search

[Alt+S]

United States (N. Virginia)

Manisha A (142083399660)

EC2

Instances

Launch an instance

Name and tags Info

Name

[Add additional tags](#)

Application and OS Images (Amazon Machine Image) Info

An AMI contains the operating system, application server, and applications for your instance. If you don't see a suitable AMI below, use the search field or choose [Browse more AMIs](#).

[Recents](#)
[Quick Start](#)

Amazon Linux

macOS

Ubuntu

Windows

Red Hat

SUSE Linux

[Browse more AMIs](#)

Summary

Number of instances Info

Software Image (AMI)
Amazon Linux 2023 AMI 2023.11....[read more](#)
ami-0236922087fa98b6e

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

[Cancel](#)
[Launch instance](#)
[Preview code](#)

aws

Search

[Alt+S]

United States (N. Virginia)

Manisha A (142083399660)

Manisha A

EC2

Instances

Launch an instance

▼ Instance type

Info | Get advice

Instance type

c7i-flex.large

Family: c7i-flex 2 vCPU 4 GiB Memory Current generation: true

On-Demand Windows base pricing: 0.17219 USD per Hour

On-Demand RHEL base pricing: 0.11359 USD per Hour

On-Demand Ubuntu Pro base pricing: 0.08829 USD per Hour

On-Demand Linux base pricing: 0.08479 USD per Hour

On-Demand SUSE base pricing: 0.14109 USD per Hour

Free tier eligible

▼

All generations

Compare instance types

Additional costs apply for AMIs with pre-installed software

▼ Key pair (login)

Info

You can use a key pair to securely connect to your instance. Ensure that you have access to the selected key pair before you launch the instance.

Key pair name - required

jen

Create new key pair

▼ Summary

Number of instances

Info

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11....read more

ami-0236922087fa98b6e

Virtual server type (instance type)

c7i-flex.large

Firewall (security group)

New security group

Cancel

Launch instance

Preview code

aws

Search

[Alt+S]

United States (N. Virginia)

Manisha A (142083399660)

Manisha A

EC2

Instances

Launch an instance

▼ Configure storage

Info

Advanced

1x 20 GiB gp3

Root volume, 3000 IOPS, Not encrypted

Add new volume

Click refresh to view backup information

The tags that you assign determine whether the instance will be backed up by any Data Lifecycle Manager policies.

File systems

S3 Files - new

EFS

FSx

None

▼ Summary

Number of instances

Info

1

Software Image (AMI)

Amazon Linux 2023 AMI 2023.11....read more

ami-0236922087fa98b6e

Virtual server type (instance type)

c7i-flex.large

Firewall (security group)

New security group

Cancel

Launch instance

Preview code

Successfully created

aws

Search

[Alt+S]

United States (N. Virginia)

Manisha A (142083399660)

Manisha A

EC2

Instances

i-0427ae37453cf61d4

EC2

Dashboard

AWS Global View

Events

▼ Instances

Instances

Instance Types

Launch Templates

Spot Requests

Savings Plans

Reserved Instances

Dedicated Hosts

Capacity Reservations

Instance summary for i-0427ae37453cf61d4 (sonarqube-server)

Info

Connect

Instance state

Actions

Updated less than a minute ago

Instance ID

i-0427ae37453cf61d4

Public IPv4 address

23.20.85.92 | open address

Private IPv4 addresses

172.31.23.67

IPv6 address

-

Instance state

Running

Public DNS

ec2-23-20-85-92.compute-1.amazonaws.com | open address

Hostname type

IP name: ip-172-31-23-67.ec2.internal

Private IP DNS name (IPv4 only)

ip-172-31-23-67.ec2.internal

Answer private resource DNS name

IPv4 (A)

Instance type

c7i-flex.large

Elastic IP addresses

-

Connect to the server


```
root@ip-172-31-23-67:~
polkit-pkla-compat-0.1-19.amzn2023.0.2.x86_64
poppler-24.08.0-1.amzn2023.x86_64
poppler-data-0.4.9-7.amzn2023.0.2.noarch
poppler-glib-24.08.0-1.amzn2023.x86_64
pulseaudio-libs-15.0-5.amzn2023.0.4.x86_64
rsvg-pixbuf-loader-2.59.2-318.amzn2023.x86_64
rtkit-0.11-26.amzn2023.0.2.x86_64
shared-mime-info-2.2-2.amzn2023.0.1.x86_64
sound-theme-freedesktop-0.8-22.amzn2023.noarch
tracker-3.7.3-3.amzn2023.0.1.x86_64
tracker-miners-3.7.4-2.amzn2023.0.2.x86_64
upower-1.90.6-139.amzn2023.x86_64
upower-libs-1.90.6-139.amzn2023.x86_64
webrtc-audio-processing-0.3.1-6.amzn2023.0.2.x86_64
wireplumber-0.5.7-1.amzn2023.0.1.x86_64
wireplumber-libs-0.5.7-1.amzn2023.0.1.x86_64
xdg-desktop-portal-1.18.4-107.amzn2023.x86_64
xdg-desktop-portal-gtk-1.15.1-61.amzn2023.x86_64
xkeyboard-config-2.41-1.amzn2023.0.1.noarch
xml-common-0.6.3-56.amzn2023.0.2.noarch
xprop-1.2.7-1.amzn2023.x86_64

Complete!
[root@ip-172-31-23-67 ~]#
```

Install and Configure MySQL

- `sudo wget https://dev.mysql.com/get/mysql57-community-release-el7-11.noarch.rpm`
- `sudo yum localinstall mysql57-community-release-el7-11.noarch.rpm`
- `rpm --import https://repo.mysql.com/RPM-GPG-KEY-mysql-2022`
- `sudo yum install mysql-community-server`
- `sudo systemctl start mysqld.service`
- `systemctl start mysqld`
- `systemctl enable mysqld`
- To check mysql is running or not → `netstat -na | grep 3306`

```

root@ip-172-31-23-67:~
[root@ip-172-31-23-67 ~]# sudo wget https://dev.mysql.com/get/mysql57-community-release-e17-11.noarch.rpm
--2026-05-16 16:56:44-- https://dev.mysql.com/get/mysql57-community-release-e17-11.noarch.rpm
Resolving dev.mysql.com (dev.mysql.com)... 23.207.138.29, 2600:1408:c400:188c::2e31, 2600:1408:c400:1881::2e31
Connecting to dev.mysql.com (dev.mysql.com)|23.207.138.29|:443... connected.
HTTP request sent, awaiting response... 302 Moved Temporarily
Location: https://repo.mysql.com//mysql57-community-release-e17-11.noarch.rpm [following]
--2026-05-16 16:56:44-- https://repo.mysql.com//mysql57-community-release-e17-11.noarch.rpm
Resolving repo.mysql.com (repo.mysql.com)... 23.33.203.94, 2600:1408:c400:1692::1d68, 2600:1408:c400:168d::1d68
Connecting to repo.mysql.com (repo.mysql.com)|23.33.203.94|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 25680 (25K) [application/x-redhat-package-manager]
Saving to: 'mysql57-community-release-e17-11.noarch.rpm'

mysql57-community-r 100%[=====>] 25.08K --.-KB/s in 0.001s

2026-05-16 16:56:44 (24.9 MB/s) - 'mysql57-community-release-e17-11.noarch.rpm' saved [25680/25680]

```

```

root@ip-172-31-23-67:~
2026-05-16 16:56:44 (24.9 MB/s) - 'mysql57-community-release-e17-11.noarch.rpm' saved [25680/25680]

[root@ip-172-31-23-67 ~]# sudo yum localinstall mysql57-community-release-e17-11.noarch.rpm
Last metadata expiration check: 0:04:13 ago on Sat May 16 16:52:43 2026.
Dependencies resolved.

=====
Package                        Arch      Version      Repository      Size
=====
Installing:
mysql57-community-release      noarch    e17-11       @commandline    25 k
=====

Transaction Summary
=====
Install 1 Package

Total size: 25 k
Installed size: 31 k
Is this ok [y/N]: y
Downloading Packages:
Running transaction check
Transaction check succeeded.
Running transaction test

```



```
root@ip-172-31-23-67:~  
mysql57-community-release-e17-11.noarch  
Complete!  
[root@ip-172-31-23-67 ~]# rpm --import https://repo.mysql.com/RPM-GPG-KEY-mysql-2022  
[root@ip-172-31-23-67 ~]# sudo yum install mysql-community-server  
MySQL Connectors Community 4.3 MB/s | 90 kB 00:00  
MySQL Tools Community 65 MB/s | 2.1 MB 00:00  
MySQL 5.7 Community Server 109 MB/s | 3.1 MB 00:00  
Dependencies resolved.  
=====
```

Package	Arch	Version	Repository	Size
Installing:				
mysql-community-server	x86_64	5.7.44-1.e17	mysql57-community	184 M
Installing dependencies:				
libxcrypt-compat	x86_64	4.4.33-7.amzn2023	amazonlinux	92 k
mysql-community-client	x86_64	5.7.44-1.e17	mysql57-community	31 M
mysql-community-common	x86_64	5.7.44-1.e17	mysql57-community	313 k
mysql-community-libs	x86_64	5.7.44-1.e17	mysql57-community	3.0 M
ncurses-compat-libs	x86_64	6.6-1.amzn2023.0.1	amazonlinux	336 k

```
Transaction Summary  
=====
```

```
root@ip-172-31-23-67:~  
drop-in file accordingly.  
  
Verifying      : libxcrypt-compat-4.4.33-7.amzn2023.x86_64 1/6  
Verifying      : ncurses-compat-libs-6.6-1.amzn2023.0.1.x86_64 2/6  
Verifying      : mysql-community-client-5.7.44-1.e17.x86_64 3/6  
Verifying      : mysql-community-common-5.7.44-1.e17.x86_64 4/6  
Verifying      : mysql-community-libs-5.7.44-1.e17.x86_64 5/6  
Verifying      : mysql-community-server-5.7.44-1.e17.x86_64 6/6  
  
Installed:  
libxcrypt-compat-4.4.33-7.amzn2023.x86_64  
mysql-community-client-5.7.44-1.e17.x86_64  
mysql-community-common-5.7.44-1.e17.x86_64  
mysql-community-libs-5.7.44-1.e17.x86_64  
mysql-community-server-5.7.44-1.e17.x86_64  
ncurses-compat-libs-6.6-1.amzn2023.0.1.x86_64  
  
Complete!  
[root@ip-172-31-23-67 ~]# sudo systemctl start mysqld.service  
[root@ip-172-31-23-67 ~]# systemctl start mysqld  
[root@ip-172-31-23-67 ~]# systemctl enable mysqld  
[root@ip-172-31-23-67 ~]# netstat -na | grep 3306  
tcp6      0      0 :::3306          :::*              LISTEN  
[root@ip-172-31-23-67 ~]# |
```

Configure the MySQL Root Password

- Retrieve the temporary root password from /var/log/mysqld.log

We can see default MySQL root password → `grep 'temporary' /var/log/mysqld.log`

First lets login to mysql using default password

`mysql -u root -p`

```
root@ip-172-31-23-67:~  
[root@ip-172-31-23-67 ~]# grep 'temporary' /var/log/mysqld.log  
2026-05-16T16:59:05.044874Z 1 [Note] A temporary password is generated for root@  
localhost: /6(T#>th+Hdr  
2026-05-16T16:59:07.448358Z 0 [Note] InnoDB: Creating shared tablespace for temp  
orary tables  
[root@ip-172-31-23-67 ~]# mysql -u root -p  
Enter password:  
Welcome to the MySQL monitor.  Commands end with ; or \g.  
Your MySQL connection id is 3  
Server version: 5.7.44  
  
Copyright (c) 2000, 2023, Oracle and/or its affiliates.  
  
Oracle is a registered trademark of Oracle Corporation and/or its  
affiliates. Other names may be trademarks of their respective  
owners.  
  
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.  
mysql> |
```

replace the default password with a new and strong password

```
ALTER USER 'root'@'localhost' IDENTIFIED BY 'Admin@123';
```

flush privileges;

```
mysql> ALTER USER 'root'@'localhost' IDENTIFIED BY 'Admin@123';  
Query OK, 0 rows affected (0.00 sec)  
  
mysql> flush privileges;  
Query OK, 0 rows affected (0.00 sec)
```

Tried to login to mysql with new password

```
mysql> exit  
Bye  
[root@ip-172-31-23-67 ~]# mysql -u root -p  
Enter password:  
Welcome to the MySQL monitor.  Commands end with ; or \g.  
Your MySQL connection id is 4  
Server version: 5.7.44 MySQL Community Server (GPL)  
  
Copyright (c) 2000, 2023, Oracle and/or its affiliates.  
  
Oracle is a registered trademark of Oracle Corporation and/or its  
affiliates. Other names may be trademarks of their respective  
owners.  
  
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.  
mysql> |
```

SonarQube Installation

To install sonarqube, goto → **cd /opt/**

To download → **wget**

<https://binaries.sonarsource.com/Distribution/sonarqube/sonarqube-6.6.zip>

To Unzip → **unzip sonarqube-6.6.zip**

To Rename → **mv /opt/sonarqube-6.6 /opt/sonar**

```
root@ip-172-31-23-67:/opt
[root@ip-172-31-23-67 ~]# cd /opt/
[root@ip-172-31-23-67 opt]# wget https://binaries.sonarsource.com/Distribution/sonarqube/sonarqube-6.6.zip
--2026-05-16 17:30:34-- https://binaries.sonarsource.com/Distribution/sonarqube/sonarqube-6.6.zip
Resolving binaries.sonarsource.com (binaries.sonarsource.com)... 3.167.37.10, 3.167.37.121, 3.167.37.88, ...
Connecting to binaries.sonarsource.com (binaries.sonarsource.com)|3.167.37.10|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 164350442 (157M) [application/zip]
Saving to: 'sonarqube-6.6.zip'

sonarqube-6.6.zip  100%[=====>] 156.74M  350MB/s   in 0.4s

2026-05-16 17:30:35 (350 MB/s) - 'sonarqube-6.6.zip' saved [164350442/164350442]

[root@ip-172-31-23-67 opt]# unzip sonarqube-6.6.zip
Archive:  sonarqube-6.6.zip
  creating: sonarqube-6.6/
  creating: sonarqube-6.6/lib/
  inflating: sonarqube-6.6/lib/sonar-application-6.6.jar
  creating: sonarqube-6.6/lib/jsw/
  inflating: sonarqube-6.6/lib/jsw/wrapper-3.2.3.jar
```

```
root@ip-172-31-23-67:/opt
-4.1.13.Final.jar
  inflating: sonarqube-6.6/elasticsearch/modules/transport-netty4/netty-handler
4.1.13.Final.jar
  inflating: sonarqube-6.6/elasticsearch/modules/transport-netty4/plugin-descri
tor.properties
  inflating: sonarqube-6.6/elasticsearch/modules/parent-join/parent-join-5.6.2.
ar
  inflating: sonarqube-6.6/elasticsearch/modules/parent-join/plugin-descriptor.
roperties
  inflating: sonarqube-6.6/elasticsearch/NOTICE.txt
  inflating: sonarqube-6.6/elasticsearch/VERSION.txt
  inflating: sonarqube-6.6/elasticsearch/config/elasticsearch.yml
  inflating: sonarqube-6.6/elasticsearch/config/log4j2.properties
  inflating: sonarqube-6.6/bin/jsw-license/LICENSE.txt
  inflating: sonarqube-6.6/extensions/plugins/README.txt
  inflating: sonarqube-6.6/extensions/jdbc-driver/oracle/README.txt
  inflating: sonarqube-6.6/COPYING
  inflating: sonarqube-6.6/temp/README.txt
  inflating: sonarqube-6.6/data/README.txt
  creating: sonarqube-6.6/logs/
  creating: sonarqube-6.6/elasticsearch/plugins/
[root@ip-172-31-23-67 opt]# mv /opt/sonarqube-6.6 /opt/sonar
[root@ip-172-31-23-67 opt]#
```


Created Databases and users, Gave the users the permissions and checked if we did right or

not.

Steps Involves and commands used

Create a new sonar database

```
CREATE DATABASE sonar CHARACTER SET utf8 COLLATE utf8_general_ci;
```

```
[root@ip-172-31-23-67 ~]# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 5
Server version: 5.7.44 MySQL Community Server (GPL)

Copyright (c) 2000, 2023, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> CREATE DATABASE sonar CHARACTER SET utf8 COLLATE utf8_general_ci;
Query OK, 1 row affected (0.00 sec)
```

Create a local and a remote user

```
CREATE USER sonar@localhost IDENTIFIED BY 'Sonar@123';
```

```
CREATE USER sonar@'%' IDENTIFIED BY 'Sonar@123';
```

```
mysql> CREATE USER 'sonar'@'localhost' IDENTIFIED BY 'Sonar@123';
Query OK, 0 rows affected (0.00 sec)

mysql> CREATE USER sonar@'%' IDENTIFIED BY 'Sonar@123';
Query OK, 0 rows affected (0.00 sec)

mysql> |
```

Grant database access permissions to users

```
GRANT ALL ON sonar.* TO sonar@localhost;
```

```
GRANT ALL ON sonar.* TO sonar@'%';
```

```
mysql> GRANT ALL ON sonar.* TO sonar@localhost;
Query OK, 0 rows affected (0.00 sec)

mysql> GRANT ALL ON sonar.* TO sonar@'%';
Query OK, 0 rows affected (0.00 sec)

mysql> |
```


To check databases → show databases;

To check users → SELECT User FROM mysql.user;

FLUSH PRIVILEGES;

QUIT

```
root@ip-172-31-23-67:~  
mysql> show databases;  
+-----+  
| Database |  
+-----+  
| information_schema |  
| mysql |  
| performance_schema |  
| sonar |  
| sys |  
+-----+  
5 rows in set (0.00 sec)  
  
mysql> SELECT User FROM mysql.user;  
+-----+  
| User |  
+-----+  
| sonar |  
| mysql.session |  
| mysql.sys |  
| root |  
| sonar |  
+-----+  
5 rows in set (0.00 sec)  
  
mysql> FLUSH PRIVILEGES;  
Query OK, 0 rows affected (0.03 sec)  
  
mysql> QUIT  
Bye  
[root@ip-172-31-23-67 ~]#
```

Lets enable SonarQube properties file to connect to the database

```
[ec2-user@ip-172-31-23-67 opt]$ sudo nano /opt/sonar/conf/sonar.properties  
[ec2-user@ip-172-31-23-67 opt]$
```

```
ec2-user@ip-172-31-23-67:/opt
GNU nano 8.3 /opt/sonar/conf/sonar.properties Modified
i# Property values can:
# - reference an environment variable, for example sonar.jdbc.url= ${env:SONAR_>
# - be encrypted. See https://redirect.sonarsource.com/doc/settings-encryption.>
#----->
# DATABASE
#
# IMPORTANT: the embedded H2 database is used by default. It is recommended for>
# production use. Supported databases are MySQL, Oracle, PostgreSQL and Microso>
# User credentials.
# Permissions to create tables, indices and triggers must be granted to JDBC us>
# The schema must be created first.
#sonar.jdbc.username=sonar
#sonar.jdbc.password=Sonar@123|
#----- Embedded Database (default)
# H2 embedded database server listening port, defaults to 9092
#sonar.embeddedDatabase.port=9092
```

```
# Binding IP address. For servers with more than one IP address, this property >
# address will be used for listening on the specified ports.
# By default, ports will be used on all IP addresses associated with the server.
#sonar.web.host=0.0.0.0
```

```
# Web context. When set, it must start with forward slash (for example /sonarqu>
# The default value is root context (empty value).
#sonar.web.context=/sonar|
```

cd /opt

sudo unzip sonarqube-6.6.zip

```
inflatng: sonarqube-6.6/conf/
inflatng: sonarqube-6.6/temp/README.txt
inflatng: sonarqube-6.6/data/README.txt
creating: sonarqube-6.6/logs/
creating: sonarqube-6.6/elasticsearch/plugins/
[ec2-user@ip-172-31-23-67 opt]$ ls
aws sonar sonarqube-6.6 sonarqube-6.6.zip
[ec2-user@ip-172-31-23-67 opt]$ cd sonarqube-6.6/logs
[ec2-user@ip-172-31-23-67 logs]$ |
```

Created user

```
[ec2-user@ip-172-31-23-67 logs]$ sudo useradd manu
[ec2-user@ip-172-31-23-67 logs]$ sudo passwd manu
Changing password for user manu.
New password:
BAD PASSWORD: The password is shorter than 8 characters
Retype new password:
passwd: all authentication tokens updated successfully.
[ec2-user@ip-172-31-23-67 logs]$ |
```

Switched to user

```
[ec2-user@ip-172-31-23-67 logs]$ sudo usermod -aG wheel manu
[ec2-user@ip-172-31-23-67 logs]$ groups manu
manu : manu wheel
[ec2-user@ip-172-31-23-67 logs]$ su - manu
Password:
```

Started sonarqube

```
[manu@ip-172-31-23-67 ~]$ sudo chown -R manu:manu /opt/sonar
[manu@ip-172-31-23-67 ~]$ cd /opt/sonar/bin/linux-x86-64
[manu@ip-172-31-23-67 linux-x86-64]$ ./sonar.sh start
Starting SonarQube...
Started SonarQube.
[manu@ip-172-31-23-67 linux-x86-64]$ ./sonar.sh status
SonarQube is running (32312).
[manu@ip-172-31-23-67 linux-x86-64]$ |
```

Successfully logged into sonarqube server


The screenshot displays the SonarQube web interface in a browser. The address bar shows the URL `23.20.85.92:9000/about`. The page header includes the SonarQube logo and navigation links: [Projects](#), [Issues](#), [Rules](#), [Quality Profiles](#), and [Quality Gates](#). A search bar is present with the placeholder text "Search for projects, sub-projects and files...".

The main content area is titled "Continuous Code Quality" and features a "Log in" button and a "Read documentation" button. To the right, there is a summary of metrics: "0 Projects Analyzed", "0 Bugs", "0 Vulnerabilities", and "0 Code Smells".

Below this, the "Multi-Language" section states: "20+ programming languages are supported by SonarQube thanks to our in-house code analyzers, including:". A grid of supported languages is shown, including Java, C/C++, C#, COBOL, ABAP, HTML, RPG, JavaScript, Objective C, XML, VB.NET, PL/SQL, Flex, Python, Groovy, PHP, Swift, Visual Basic, and PL/I.


The "Quality Model" section is partially visible at the bottom.

A modal dialog box titled "Log In to SonarQube" is open in the foreground. It contains two input fields: the first is labeled "admin" and the second is a password field with masked characters. Below the password field are "Log in" and "Cancel" buttons.

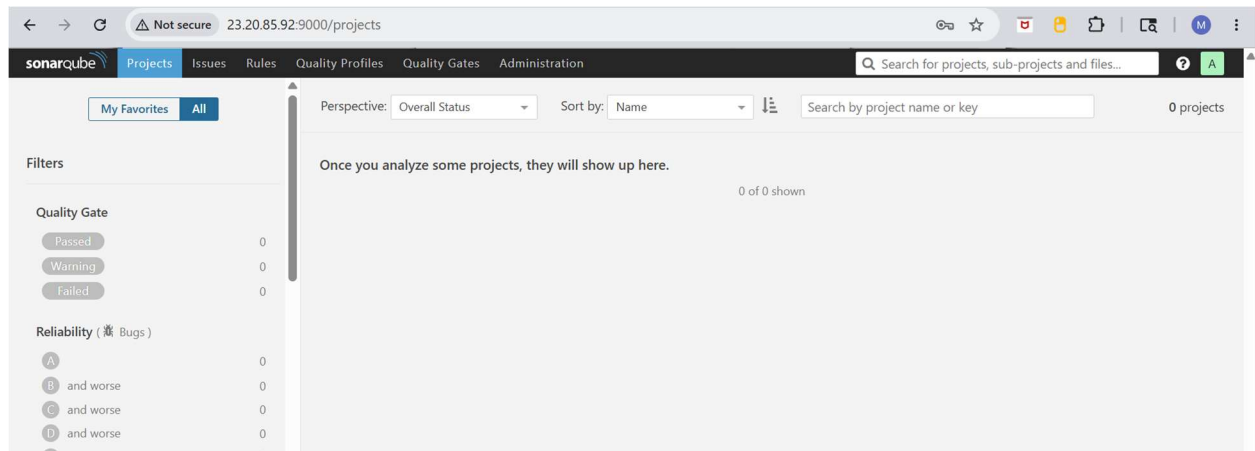

SonarQube Scanner on our Jenkins

Go to Manage Jenkins → Plugins → Sonarcube scanner → click on Install

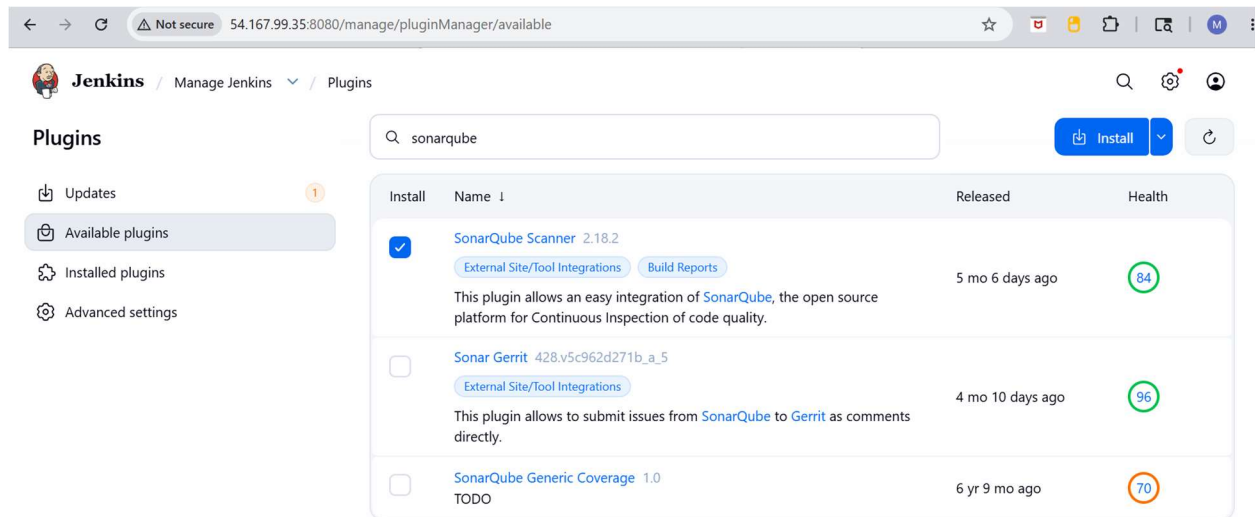

 **Jenkins** / Manage Jenkins / Plugins

Plugins

- Updates
- Available plugins
- Installed plugins
- Advanced settings
- Download progress**

Download progress

1 Preparation

- Checking internet connectivity
- Checking update center connectivity
- Success

SonarQube Scanner ✓ Success

Loading plugin extensions ✓ Success

→ [Go back to the top page](#)
(you can start using the installed plugins right away)

→ ☐ Restart Jenkins when installation is complete and no jobs are running

To create

Manage Jenkins → click on system → SonarQube server → give Name → Server URL → Credentials

 **Jenkins** / Manage Jenkins / System

SonarQube installations

List of SonarQube installations

Name

SonarQube

Server URL

Default is http://localhost:9000

http://23.20.85.92:9000/

Server authentication token

SonarQube authentication token. Mandatory when anonymous access is disabled.



- none -

+ Add

Save Apply


Generate an Authentication Token in SonarQube

- Log into SonarQube → My Account → Security → Generate Tokens
- Copy the generated token.

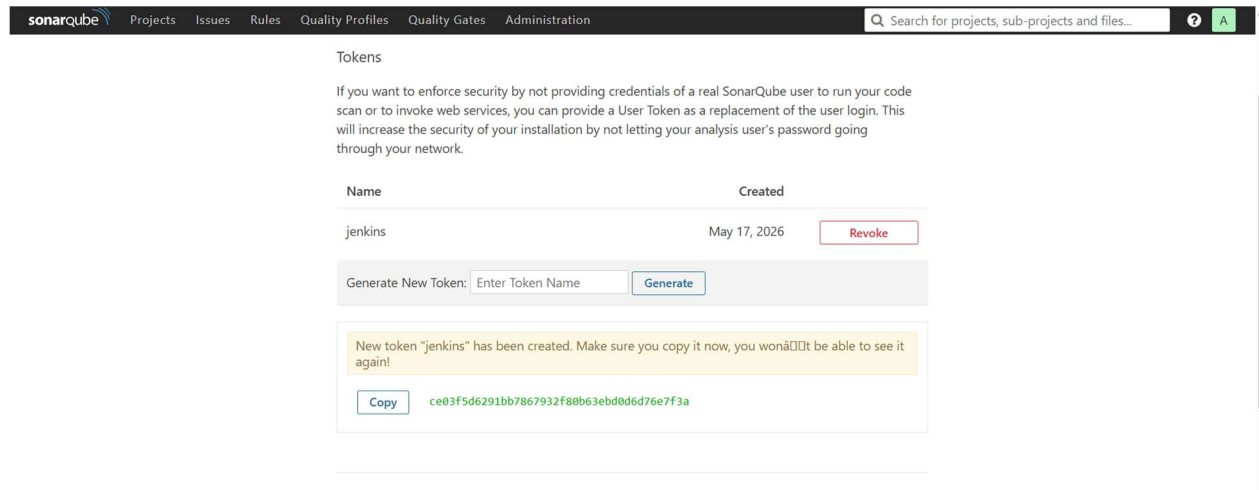
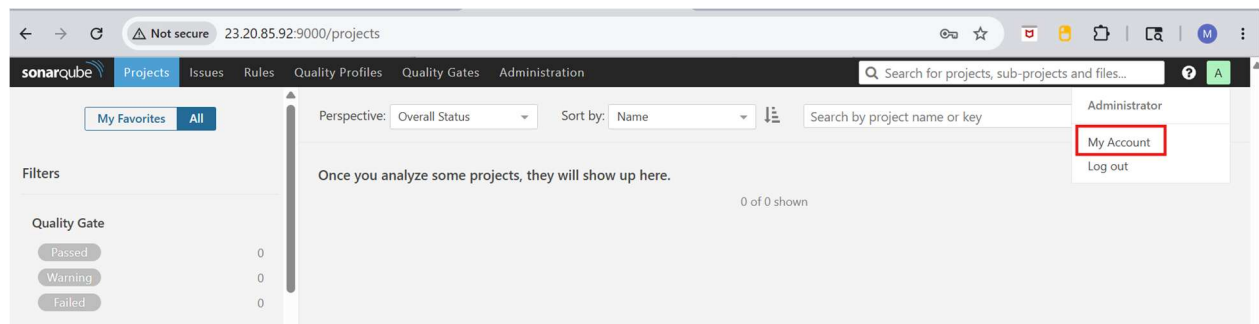


Add it to Jenkins credentials


Go to manage Jenkins → click on credentials

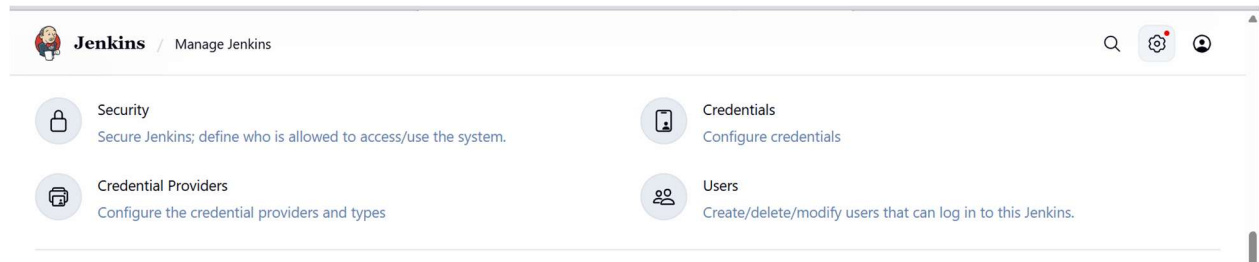


Click on global → add credentials → secret text

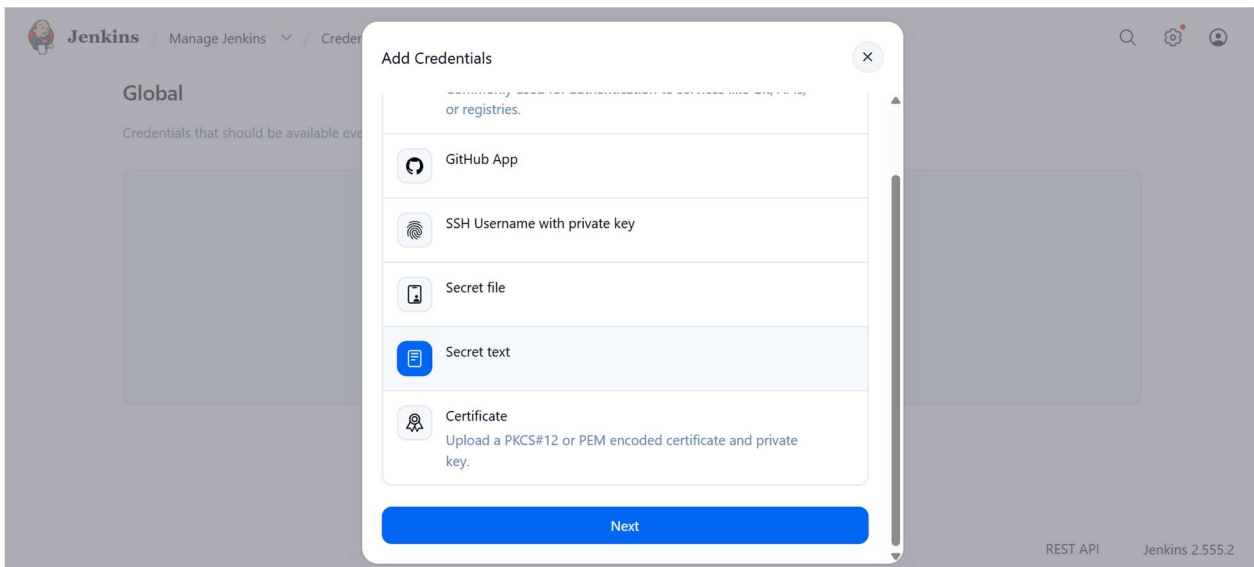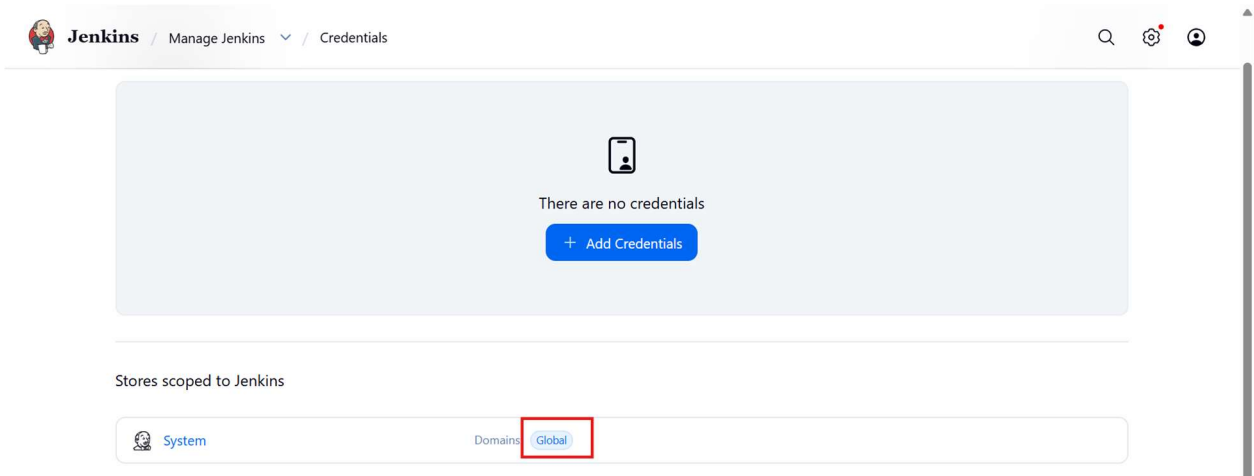

Paste the token

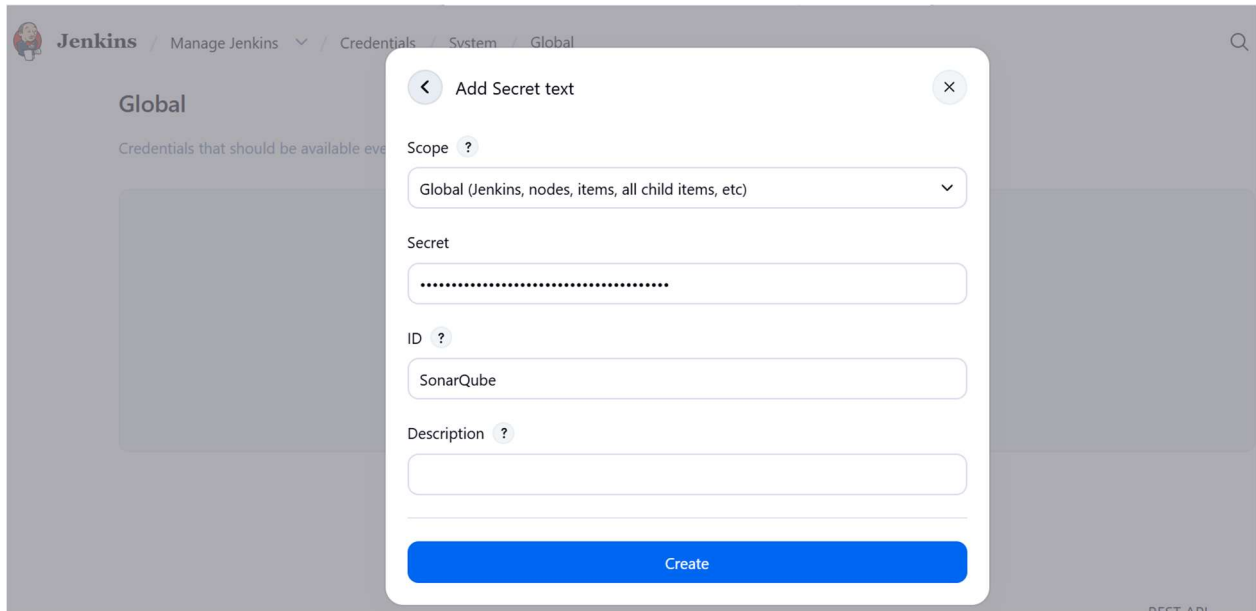


Created credentials

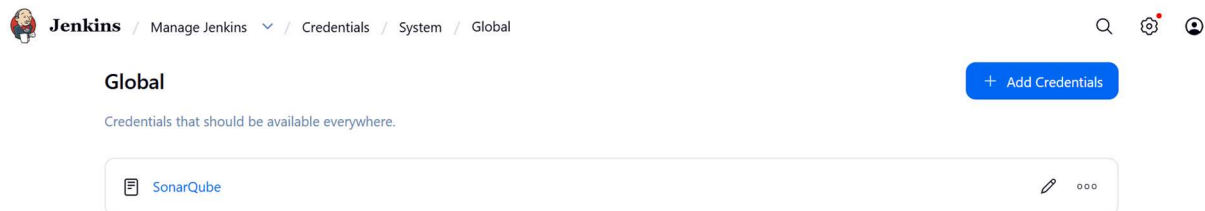

add the credential in the configurations

go to manage Jenkins → click on system → choose sonarqube server → add credential to server authentication token

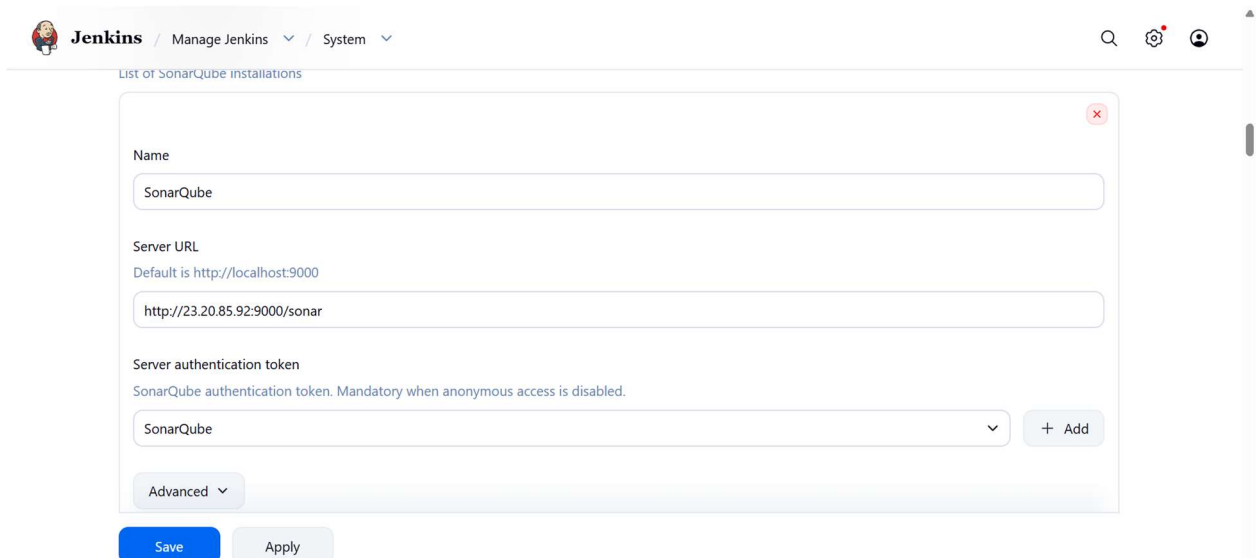

We need to install sonarqube-scanner in Jenkins server

To Download - `wget https://binaries.sonarsource.com/Distribution/sonar-scanner-cli/sonar-`

scanner-cli-3.2.0.1227-linux.zip.zip

```
root@ip-172-31-31-236:/opt
[root@ip-172-31-31-236 opt]# wget https://binaries.sonarsource.com/Distribution/
sonar-scanner-cli/sonar-scanner-cli-3.2.0.1227-linux.zip
--2026-05-16 19:54:18-- https://binaries.sonarsource.com/Distribution/sonar-sca
nner-cli/sonar-scanner-cli-3.2.0.1227-linux.zip
Resolving binaries.sonarsource.com (binaries.sonarsource.com)... 3.167.37.88, 3.
167.37.95, 3.167.37.121, ...
Connecting to binaries.sonarsource.com (binaries.sonarsource.com)|3.167.37.88|:4
43... connected.
HTTP request sent, awaiting response... 200 OK
Length: 73847400 (70M) [application/zip]
Saving to: 'sonar-scanner-cli-3.2.0.1227-linux.zip'

sonar-scanner-cli-3 100%[=====>] 70.43M 364MB/s in 0.2s

2026-05-16 19:54:18 (364 MB/s) - 'sonar-scanner-cli-3.2.0.1227-linux.zip' saved
[73847400/73847400]
```

- To Unzip - unzip sonar-scanner-cli-3.2.0.1227-linux.zip
- To Rename - mv sonar-scanner-3.2.0.1227-linux /opt/sonar_scanner

```
root@ip-172-31-31-236:/opt
[root@ip-172-31-31-236 opt]# unzip sonar-scanner-cli-3.2.0.1227-linux.zip
Archive: sonar-scanner-cli-3.2.0.1227-linux.zip
  creating: sonar-scanner-3.2.0.1227-linux/
  creating: sonar-scanner-3.2.0.1227-linux/jre/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/cmm/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/pt_BR/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/pt_BR/LC_MESSAGES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/fr/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/fr/LC_MESSAGES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/ja/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/ja/LC_MESSAGES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/zh_HK.BIG5HK/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/zh_HK.BIG5HK/LC_MESSA
GES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/it/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/it/LC_MESSAGES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/zh_TW.BIG5/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/zh_TW.BIG5/LC_MESSAG
S/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/zh_TW/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/zh_TW/LC_MESSAGES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/zh.GBK/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/zh.GBK/LC_MESSAGES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/sv/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/sv/LC_MESSAGES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/ko/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/ko/LC_MESSAGES/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/ko.UTF-8/
  creating: sonar-scanner-3.2.0.1227-linux/jre/lib/locale/ko.UTF-8/LC_MESSAGES/
```



```


root@ip-172-31-31-236:/opt
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/deploy/messages_sv.properties
s
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/fontconfig.properties.src
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/jfr/profile.jfc
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/jfr/default.jfc
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/jvm.hprof.txt
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/jce.jar
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/calendars.properties
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/fontconfig.SuSE.11.bfc
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/logging.properties
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/meta-index
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/fontconfig.RedHat.5.bfc
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/net.properties
inflating: sonar-scanner-3.2.0.1227-linux/jre/lib/psfontj2d.properties
inflating: sonar-scanner-3.2.0.1227-linux/jre/LICENSE
inflating: sonar-scanner-3.2.0.1227-linux/jre/COPYRIGHT
inflating: sonar-scanner-3.2.0.1227-linux/jre/release
inflating: sonar-scanner-3.2.0.1227-linux/jre/README
inflating: sonar-scanner-3.2.0.1227-linux/jre/welcome.html
inflating: sonar-scanner-3.2.0.1227-linux/jre/bin/java
inflating: sonar-scanner-3.2.0.1227-linux/lib/sonar-scanner-cli-3.2.0.1227.jar

inflating: sonar-scanner-3.2.0.1227-linux/conf/sonar-scanner.properties
inflating: sonar-scanner-3.2.0.1227-linux/bin/sonar-scanner
inflating: sonar-scanner-3.2.0.1227-linux/bin/sonar-scanner-debug
finishing deferred symbolic links:
  sonar-scanner-3.2.0.1227-linux/jre/lib/amd64/server/libjsig.so -> ../libjsig.so
o
[root@ip-172-31-31-236 opt]# mv sonar-scanner-3.2.0.1227-linux /opt/sonar_scanner
r
[root@ip-172-31-31-236 opt]# |
[ root@ip-172-31-31-236 opt]# ls
aws  sonar-scanner-cli-3.2.0.1227-linux.zip  sonar_scanner
[ root@ip-172-31-31-236 opt]# pwd
/opt
[ root@ip-172-31-31-236 opt]# cd sonar_scanner
[ root@ip-172-31-31-236 sonar_scanner]# ls
bin  conf  jre  lib
[ root@ip-172-31-31-236 sonar_scanner]# pwd
/opt/sonar_scanner
[ root@ip-172-31-31-236 sonar_scanner]# cd bin
[ root@ip-172-31-31-236 bin]# ls
sonar-scanner  sonar-scanner-debug
[ root@ip-172-31-31-236 bin]# pwd
/opt/sonar_scanner/bin
[ root@ip-172-31-31-236 bin]# cd ..
[ root@ip-172-31-31-236 sonar_scanner]# pwd
/opt/sonar_scanner
[ root@ip-172-31-31-236 sonar_scanner]# |

```

Add the above sonar-scanner path in the Jenkins

Go to manage Jenkins → sonarQube Scanner → Name → Path → Save

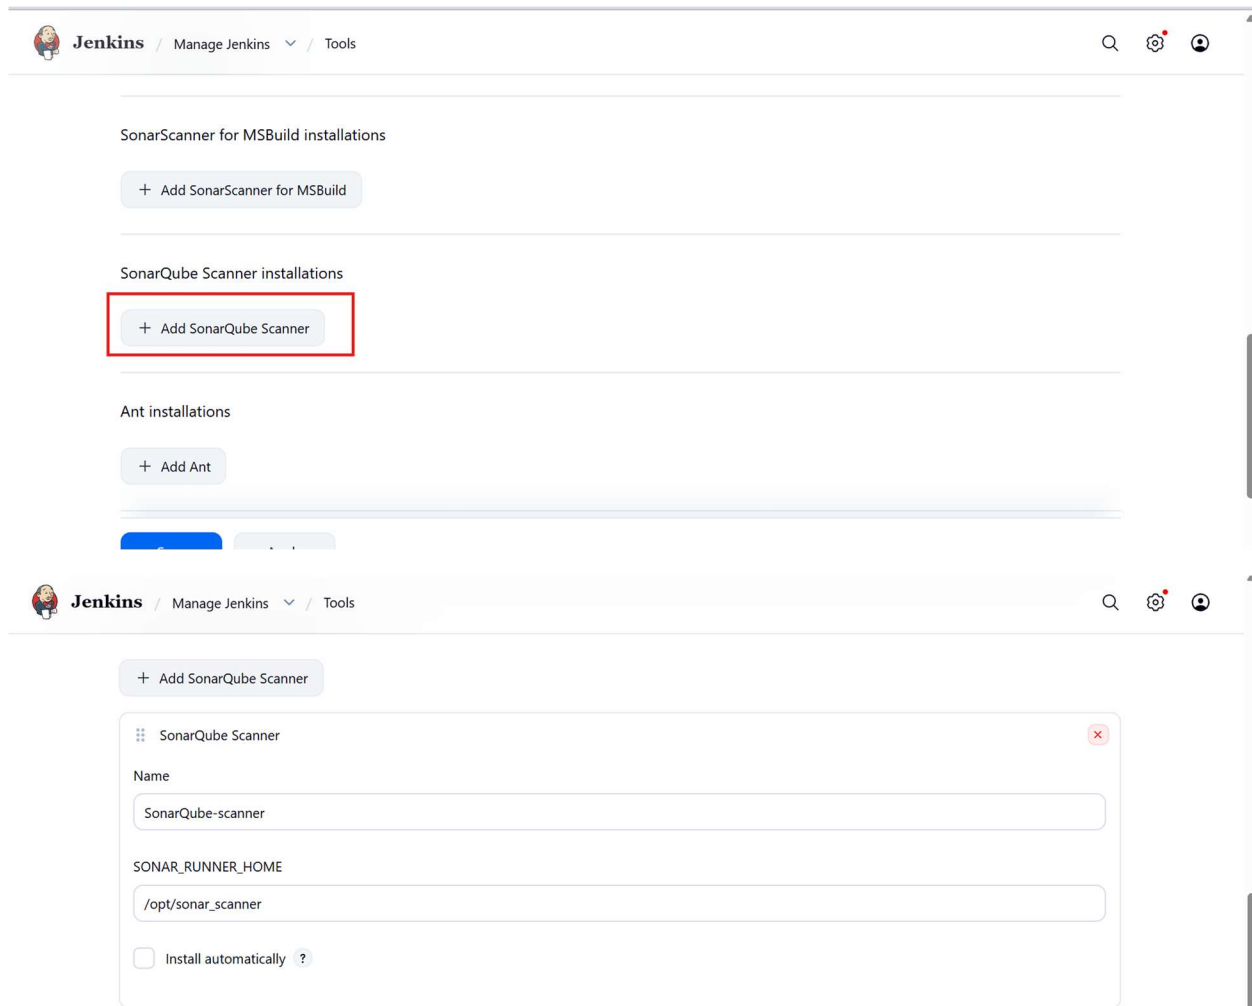

Next We need to give analysis properties of the code to run in the Job we created

Job → Configure → Build Steps → Analysis Properties (we will get it from developers)
→ Save

Jenkins

v-profile

Configure

Configure

General

Source Code Management

Triggers

Environment

Build Steps

Post-build Actions

Build Steps

Automate your build process with ordered tasks like code compilation, testing, and deployment.

+ Add build step

Filter

Execute SonarQube Scanner

Execute Windows batch command

Execute shell

Invoke Ant

Invoke Gradle script

Invoke top-level Maven targets

Run with timeout

Set build status to "pending" on GitHub commit

SonarScanner for MSBuild - Begin Analysis

SonarScanner for MSBuild - End Analysis

REST API

Jenkins

Jenkins

v-profile

Configure

Configure

General

Source Code Management

Triggers

Environment

Build Steps

Post-build Actions

Execute SonarQube Scanner

JDK ?

JDK to be used for this SonarQube analysis

(Inherit From Job)

Path to project properties ?

Analysis properties ?

sonar.projectVersion=1.0
sonar.sources=/var/lib/jenkins/workspace/\$JOB_NAME/src/
sonar.binaries=target/classes/com/visualpathit/account/controller/
sonar.junit.reportsPath=target/surefire-reports
sonar.jacoco.reportPath=target/jacoco.exec
sonar.java.binaries=src/main/java/com/visualpathit/account/

Additional arguments ?

Save

Apply

Jenkins

v-profile

Configure

Configure

General

Source Code Management

Triggers

Environment

Build Steps

Post-build Actions

Execute SonarQube Scanner

JDK ?

JDK to be used for this SonarQube analysis

(Inherit From Job)

Path to project properties ?

Analysis properties ?

sonar.projectKey=Sabear
sonar.projectName=Sabear
sonar.projectVersion=1.0
sonar.sources=/var/lib/jenkins/workspace/\$JOB_NAME/src/
sonar.binaries=target/classes/com/visualpathit/account/controller/
sonar.junit.reportsPath=target/surefire-reports
sonar.jacoco.reportPath=target/jacoco.exec
sonar.java.binaries=src/main/java/com/visualpathit/account/

After clicking on build now

 **Jenkins** / v-profile

Status

Changes

Workspace

Build Now

Configure

Delete Project

SonarQube

Rename

Builds >

Today

✓ #7 8:37 pm

✓ v-profile

simple app

 SonarQube

SonarQube Quality Gate

Sabear **Passed**

server-side processing: **Success**

Permalinks

- Last build (#7), 1 min 22 sec ago
- Last stable build (#7), 1 min 22 sec ago
- Last successful build (#7), 1 min 22 sec ago
- Last failed build (#6), 7 min 39 sec ago
- Last unsuccessful build (#6), 7 min 39 sec ago
- Last completed build (#7), 1 min 22 sec ago

 **Jenkins** / v-profile / #7

Status

Changes

Console Output

Edit Build Information

Delete build '#7'

Timings

Git Build Data

Previous Build

✓ #7 (16-May-2026, 8:37:19 pm)

Started by user [admin](#)

This run spent:

- 3 ms waiting;
- 6.5 sec build duration;
- 6.5 sec total from scheduled to completion.

 **Revision:** afc137167b41aaaf82b81aee721ec883901
Repository: <https://github.com/betawins/VProfile-1.git>

- refs/remotes/origin/master

</>


No changes.

Add description


Keep this build forever

Started 49 sec ago
Took **6.5 sec**

Job ran successfully

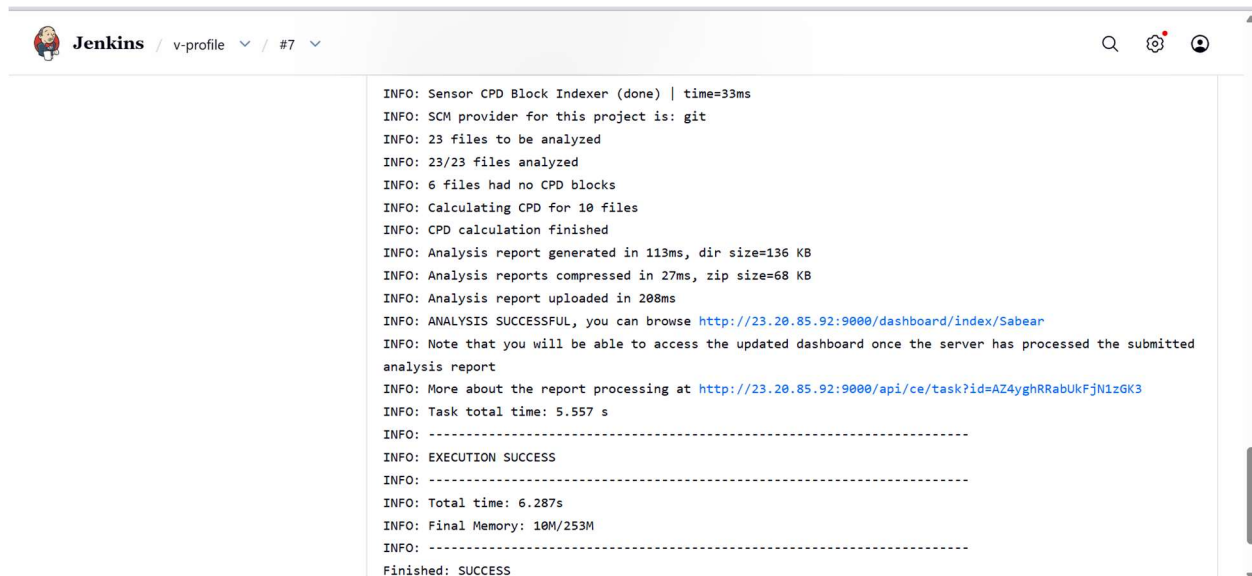

It also passed in sonarqube

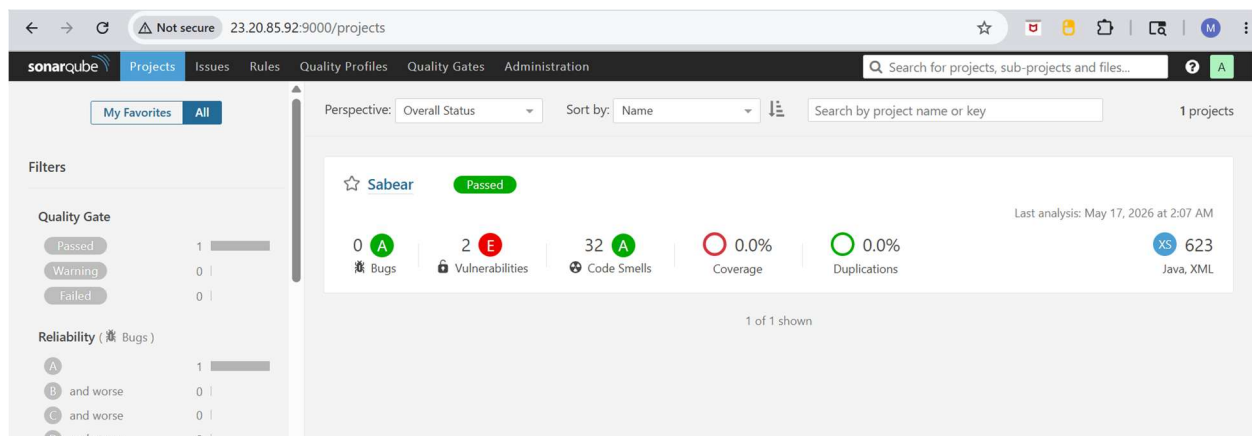

Stage 3 : Slack Integration to send the alerts to slack.

Go to manage Jenkins → plugins → available plugins → search for slack notification → install

← → ↻ ⚠ Not secure 54.167.99.35:8080/manage/pluginManager/available ☆ 📄 📁 📄 📄 📄 📄 📄

Jenkins / Manage Jenkins ▾ / Plugins 🔍 ⚙️ 👤

Plugins

📁 Updates 1

📁 Available plugins

🔗 Installed plugins

⚙️ Advanced settings

☰ Download progress

🔍 slack

Install **Install** ↕ ↻

Install	Name ↓	Released	Health
☒	Slack Notification 795.v4b_9705b_e6d47 slack Build Notifiers Integrates Jenkins with Slack, allows publishing build statuses, messages and files to Slack channels.	9 mo 15 days ago	95
☐	Global Slack Notifier 1.5 slack This plugin post to slack after any build completed without any job setting.	7 yr 3 mo ago	70
☐	Build Notifications 1.5.0 Send build notifications through Telegram, Pushover, Boteco or Slack.		

Jenkins / Manage Jenkins ▾ / Plugins 🔍 ⚙️ 👤

Plugins

📁 Updates 1

📁 Available plugins

🔗 Installed plugins

⚙️ Advanced settings

☰ Download progress

Download progress

Preparation

- Checking internet connectivity
- Checking update center connectivity
- Success

SonarQube Scanner ✓ Success

Loading plugin extensions ✓ Success

Apache HttpComponents Client 5.x API ✓ Success

Slack Notification ✓ Success

Loading plugin extensions ✓ Success

→ [Go back to the top page](#)
(you can start using the installed plugins right away)

I have created a slack account

← → ↻ app.slack.com/client/T0B47QJF70E?entry_point=nav_menu ☆ 📄 📄 📄 📄 📄 📄

Name your Slack workspace

Choose something your team will recognize like the name of your company or team. You can always update it later.

ex. Acme Inc. 50

Next



Your workspace

- 📁 Uploads
- 📁 Threads
- 📁 Channels
 - # project
 - + Add channels
- 📁 Direct messages
 - 👤 Your name
 - 👤 Your teammate
 - + Add teammates

project

Messages

Install incoming webhooks

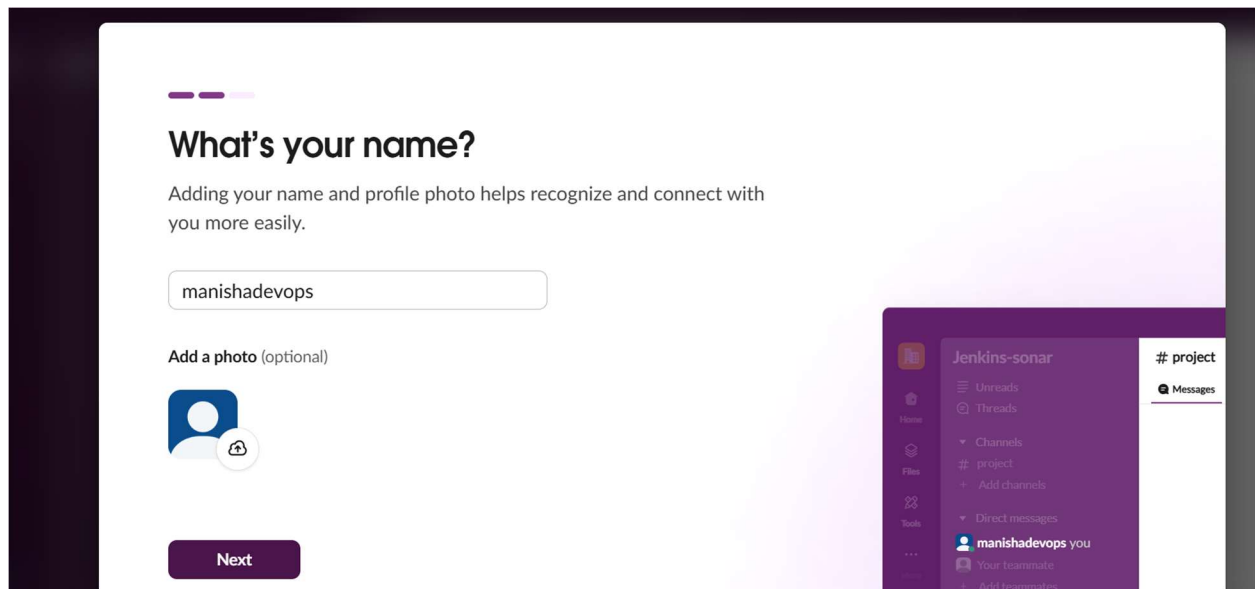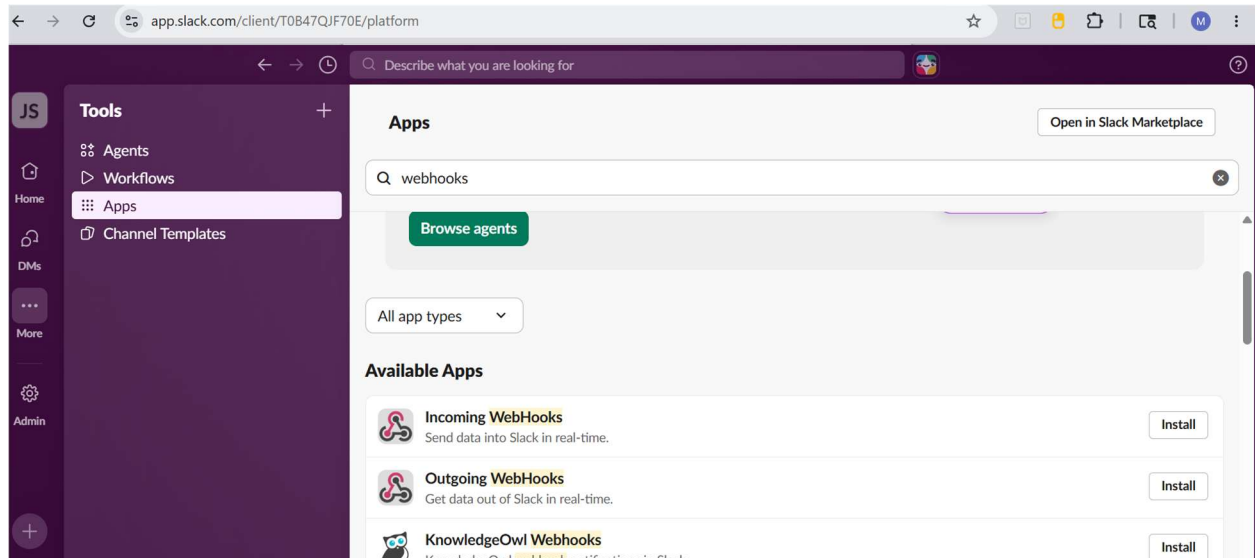

Click on add to slack

Find an app or a service you already use



Add to Slack

Learn more & Support

[Get app support](#)

[Privacy policy](#)

Incoming WebHooks

Description

Permissions

Security & Compliance

Please note, this is a legacy custom integration - an outdated way for teams to integrate with Slack. These integrations lack newer features and they will be deprecated and possibly removed in the future. **We do not recommend their use.** Instead, we suggest that you check out their replacement: [Slack apps](#).

Incoming Webhooks are a simple way to post messages from external sources into Slack. They make use of normal HTTP requests with a JSON payload, which includes the message and a few other optional details described later.

[Message Attachments](#) can also be used in Incoming Webhooks to display richly-formatted messages that stand out from regular chat messages.

jenkins-sonargroup.slack.com/marketplace/new/A0F7XDUAZ-incoming-webhooks

Find an app or a service you already use



Incoming WebHooks

Send data into Slack in real-time.

Please note, this is a legacy custom integration - an outdated way for teams to integrate with Slack. These integrations lack newer features and they will be deprecated and possibly removed in the future. **We do not recommend their use.** Instead, we suggest that you check out their replacement: [Slack apps](#).

Incoming Webhooks are a simple way to post messages from external sources into Slack. They make use of normal HTTP requests with a JSON payload, which includes the message and a few other optional details described later.

[Message Attachments](#) can also be used in Incoming Webhooks to display richly-formatted messages that stand out from regular chat messages.



New to Slack integrations?

Check out our [Getting Started](#) guide to familiarize yourself with the most common types of integrations, and tips to keep in mind while building your own. You can also [register as a developer](#) to let us know what you're working on, and to receive future

Copy webhook url

jenkins-sonargroup.slack.com/services/B0B4EML5S1J?added=1

Slack Marketplace

Find an app or a service you already use

Post to Channel
Messages that are sent to the incoming webhook will be posted here.

#all-jenkins-sonar

or create a new channel

Webhook URL
Send your JSON payloads to this URL.
[Show setup instructions](#)

https://hooks.slack.com/services/T0B47QJF70E/B0B4EML5S1J/2eJ0sqhxMHqj

Copy URL • Regenerate

Descriptive Label
Use this label to provide extra context

Optional description of this integration

Click on add incoming webhook integration

Slack Marketplace

Find an app or a service you already use

New to Slack integrations?
Check out our [Getting Started](#) guide to familiarize yourself with the most common types of integrations, and tips to keep in mind while building your own. You can also [register as a developer](#) to let us know what you're working on, and to receive future updates to our APIs.

Post to Channel
Start by choosing a channel where your Incoming Webhook will post messages to.


#all-jenkins-sonar

or create a new channel


Add Incoming WebHooks integration

By creating an incoming webhook, you agree to the [Slack API Terms of Service](#).

We can able to see that webhook integrated

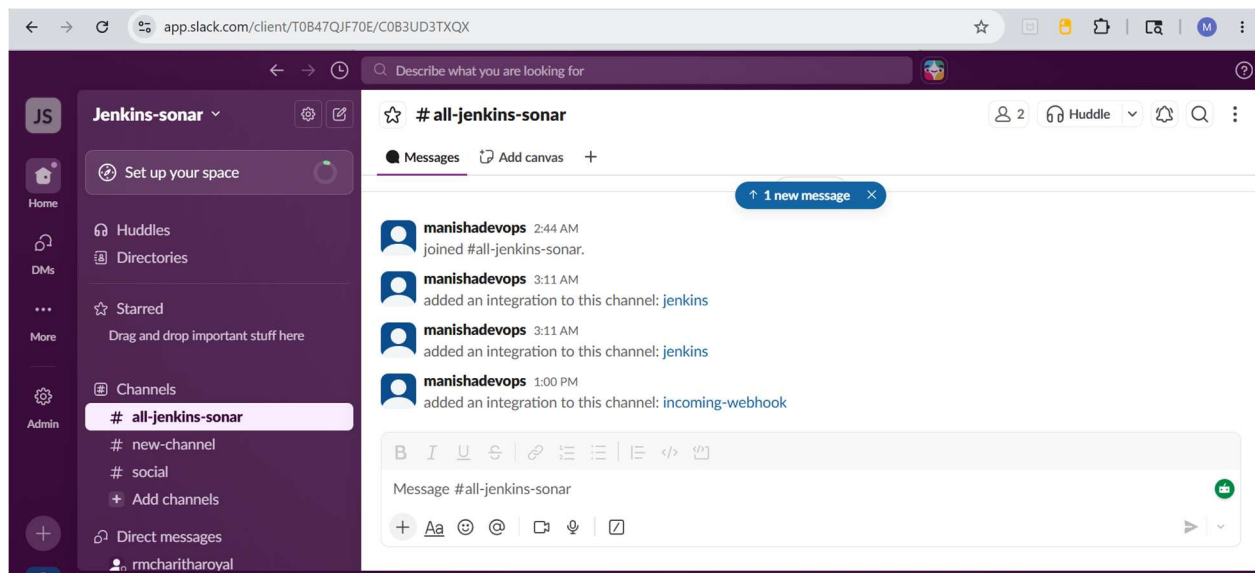

Install Jenkins CI

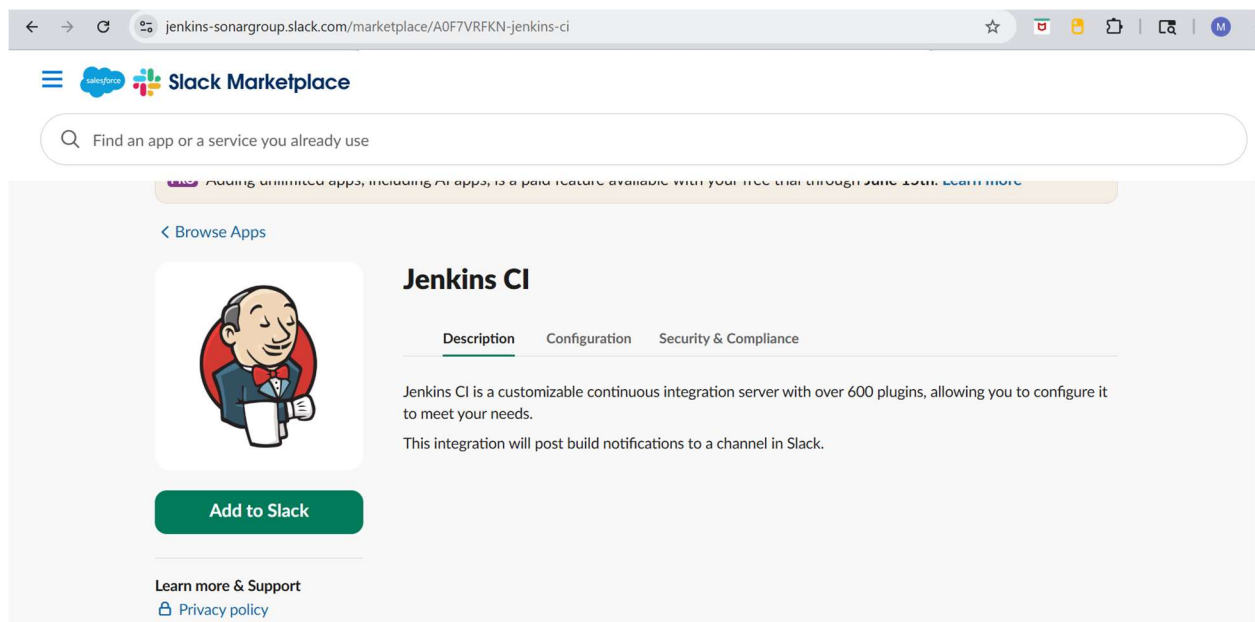

Add Jenkins CI integration

jenkins-sonargroup.slack.com/marketplace/new/A0F7VRFKN-jenkins-ci

Slack Marketplace

Find an app or a service you already use

Jenkins CI is a customizable continuous integration server with over 600 plugins, allowing you to configure it to meet your needs.
This integration will post build notifications to a channel in Slack.

Post to Channel
Start by choosing a channel where Jenkins notifications will be posted.

#all-jenkins-sonar

[or create a new channel](#)

Add Jenkins CI integration

Copy the token

jenkins-sonargroup.slack.com/services/B0B491TF2QN?added=1

Slack Marketplace

Find an app or a service you already use

Token
This token is used as the key to your Jenkins CI integration.

udbH0KB6VMNu9bQK8mv7ZgRq

[Regenerate](#)


Descriptive Label
Use this label to provide extra context in your list of integrations (optional).

Optional description of this integration


Customize Name
Choose the username that this integration will post as.

jenkins

Go to manage Jenkins → credentials → click on secret text → add the copied token in secret

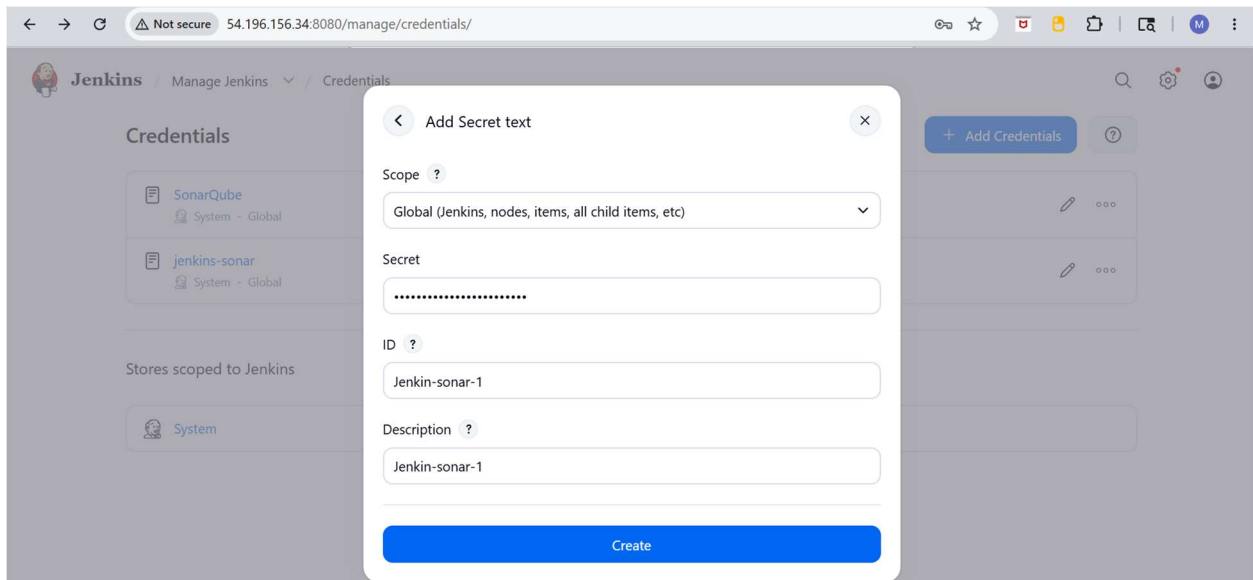

If we open the channel in slack there we will be having channel id, copy that and give in channel id section

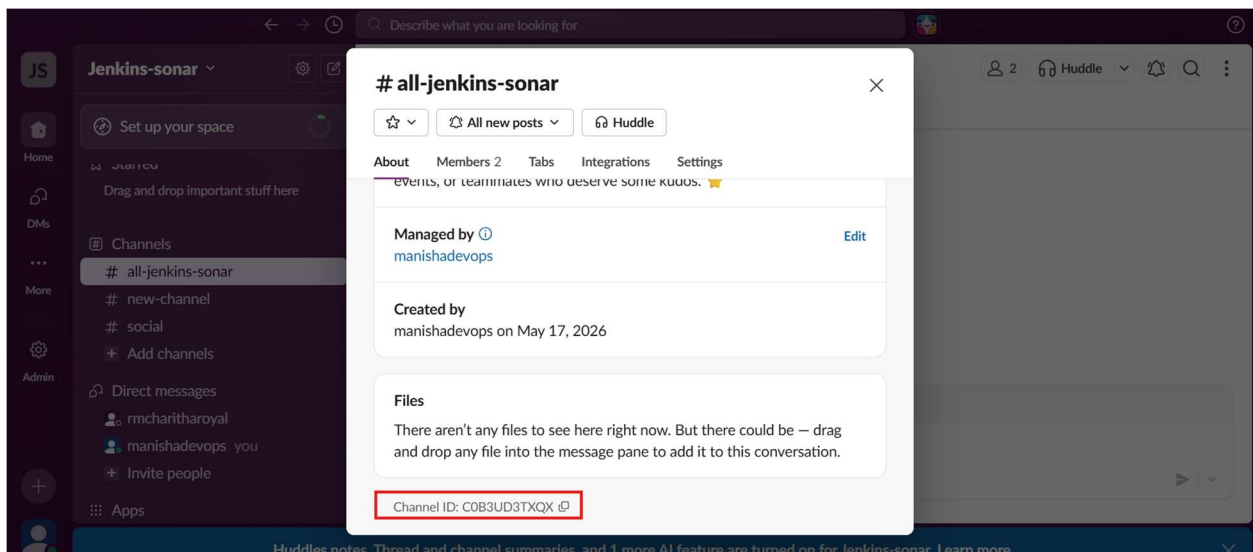

← → ↻ ⚠ Not secure 54.196.156.34:8080/manage/configure#53-6c-61-63-6b ☆ 📄 🗂 🔍 👤

Jenkins / Manage Jenkins ▾ / System ▾ 🔍 ⚙️ 👤

Workspace ?

jenkins-sonargroup

Credential ?

Jenkin-sonar-1 ▾ + Add

Default channel / member id ?

C0B3UD3TXQX

☐ Custom slack app bot user ?

Advanced ▾

Test Connection

Save Apply

← → ↻ ⚠ Not secure 54.196.156.34:8080/manage/configure#53-6c-61-63-6b ☆ 📄 🗂 🔍 👤

Jenkins / Manage Jenkins ▾ / System ▾ 🔍 ⚙️ 👤

Jenkin-sonar-1 ▾ + Add

Default channel / member id ?

C0B3UD3TXQX

☐ Custom slack app bot user ?


Advanced ▾

Success


Test Connection


Clear cache

Save Apply

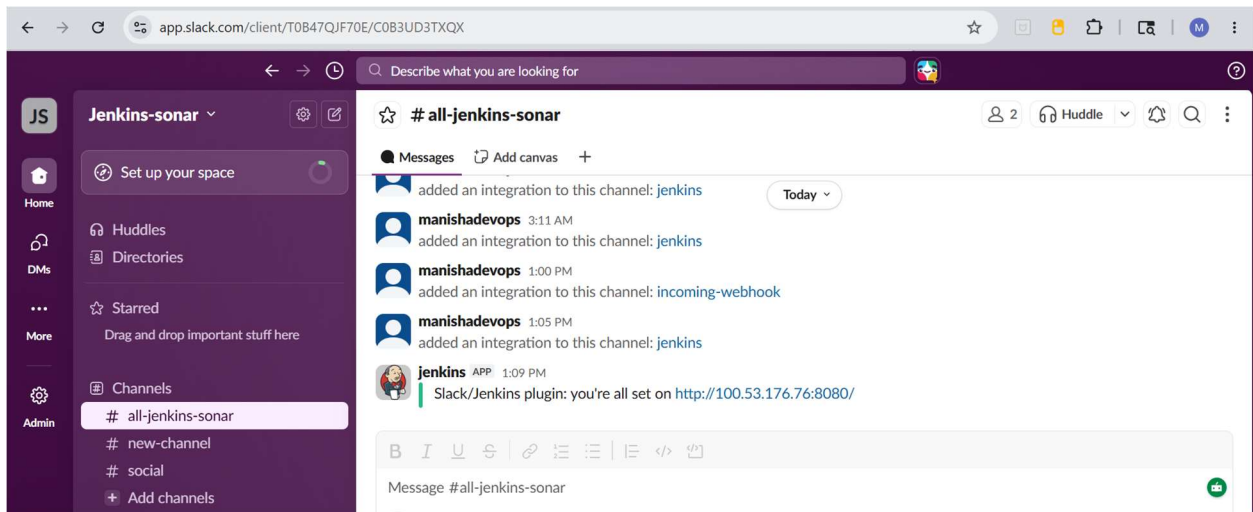


Go to manage Jenkins → click on build → go to post build actions → enter slack workspace → select credentials → give channel id → click on test connection

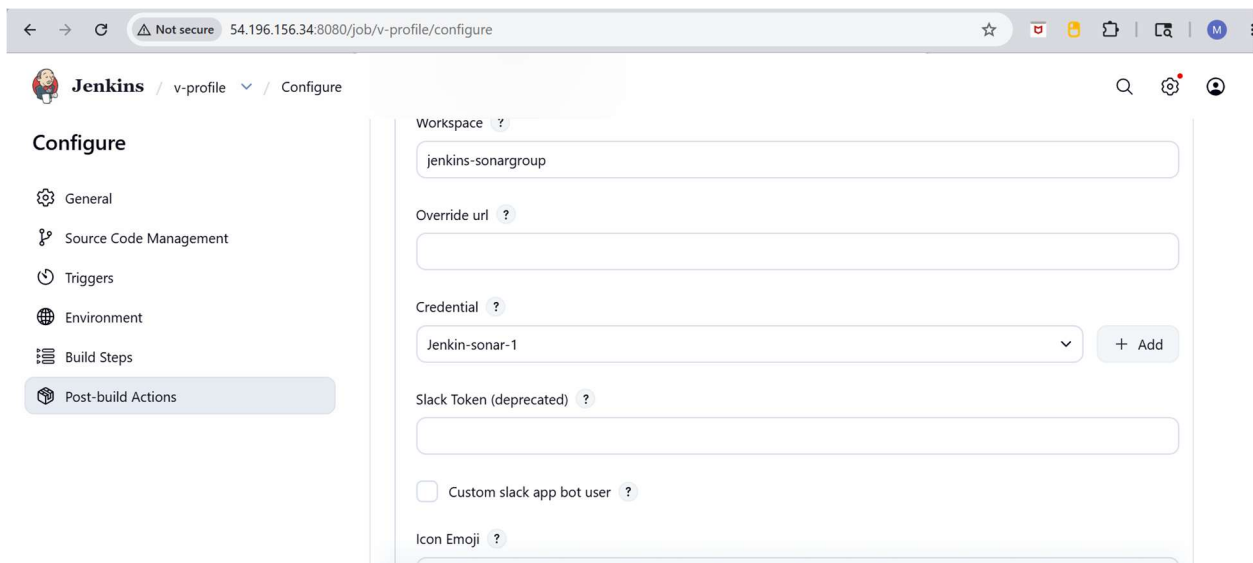


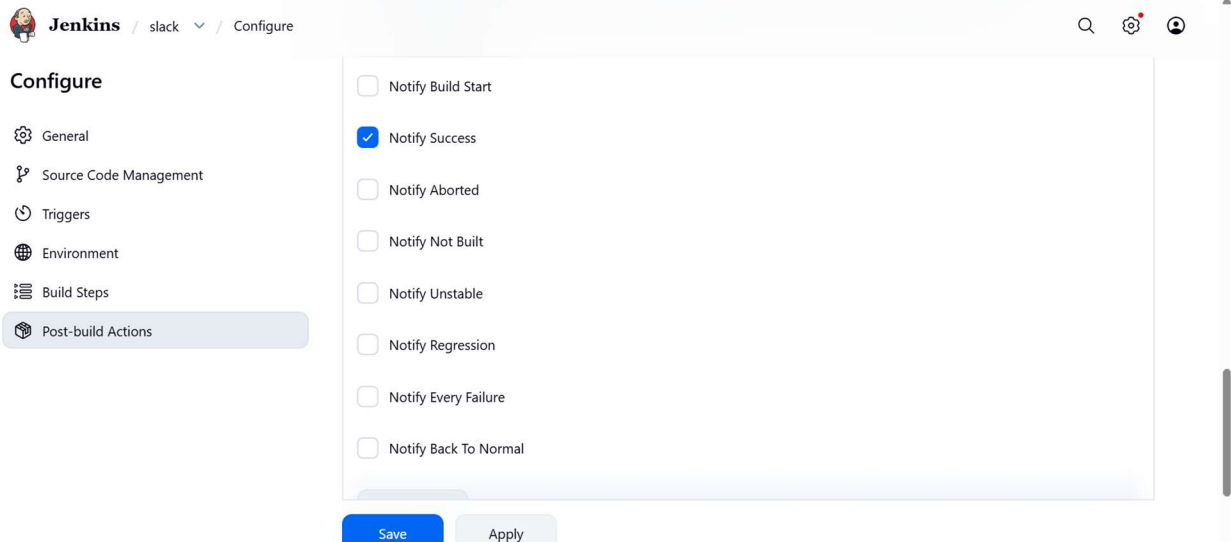

Here we can see connection is successful

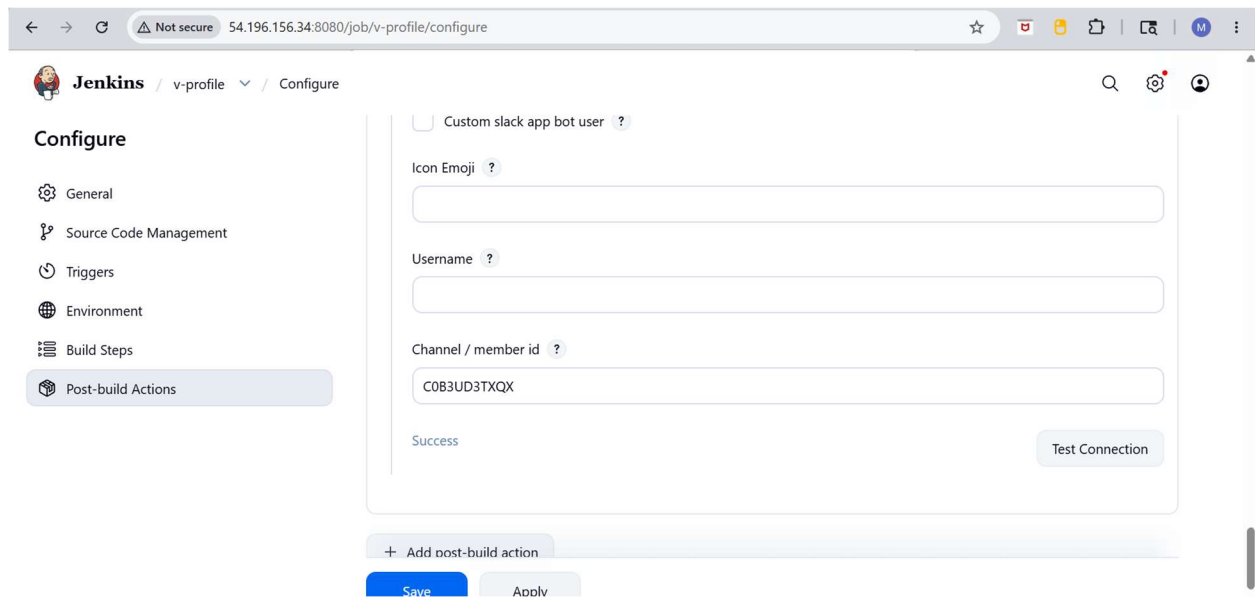


When we click on build it is successfully ran

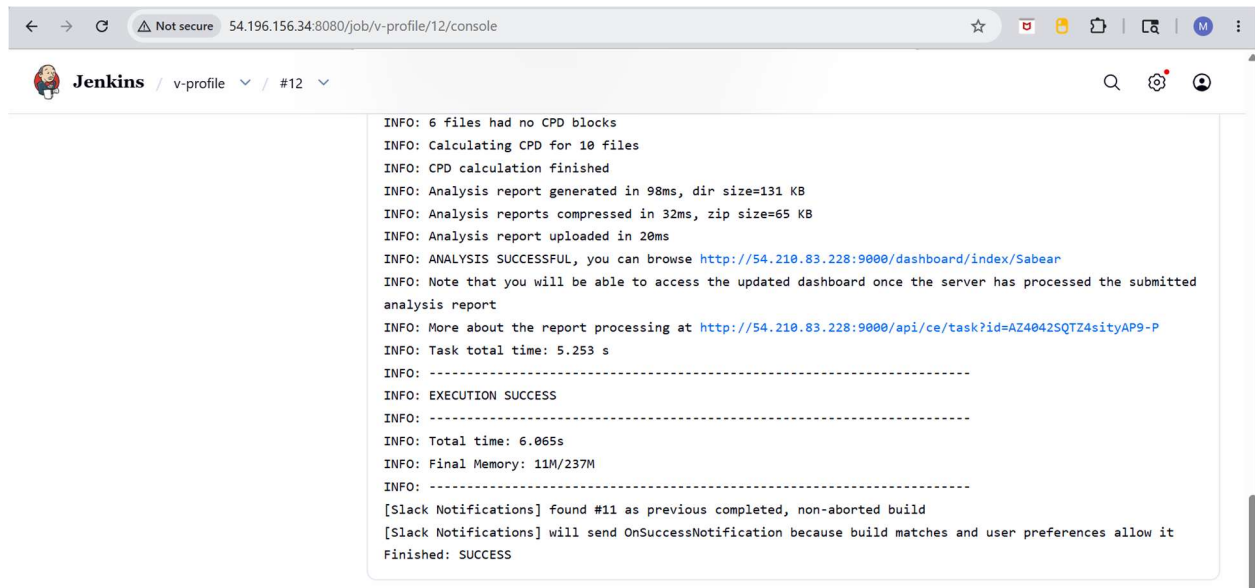

The screenshot shows the Jenkins console output for a job named 'v-profile' at build #12. The output displays various informational messages (INFO) regarding CPD calculation, analysis report generation, and successful execution. It includes links to the dashboard and API endpoints for further details. The build concludes with a 'Finished: SUCCESS' status.

```
INFO: 6 files had no CPD blocks
INFO: Calculating CPD for 10 files
INFO: CPD calculation finished
INFO: Analysis report generated in 98ms, dir size=131 KB
INFO: Analysis reports compressed in 32ms, zip size=65 KB
INFO: Analysis report uploaded in 20ms
INFO: ANALYSIS SUCCESSFUL, you can browse http://54.210.83.228:9000/dashboard/index/Sabear
INFO: Note that you will be able to access the updated dashboard once the server has processed the submitted analysis report
INFO: More about the report processing at http://54.210.83.228:9000/api/ce/task?id=AZ4042SQTZ4sityAP9-P
INFO: Task total time: 5.253 s
INFO: -----
INFO: EXECUTION SUCCESS
INFO: -----
INFO: Total time: 6.065s
INFO: Final Memory: 11M/237M
INFO: -----
[Slack Notifications] found #11 as previous completed, non-aborted build
[Slack Notifications] will send OnSuccessNotification because build matches and user preferences allow it
Finished: SUCCESS
```

Also we are able to get the alerts in slack

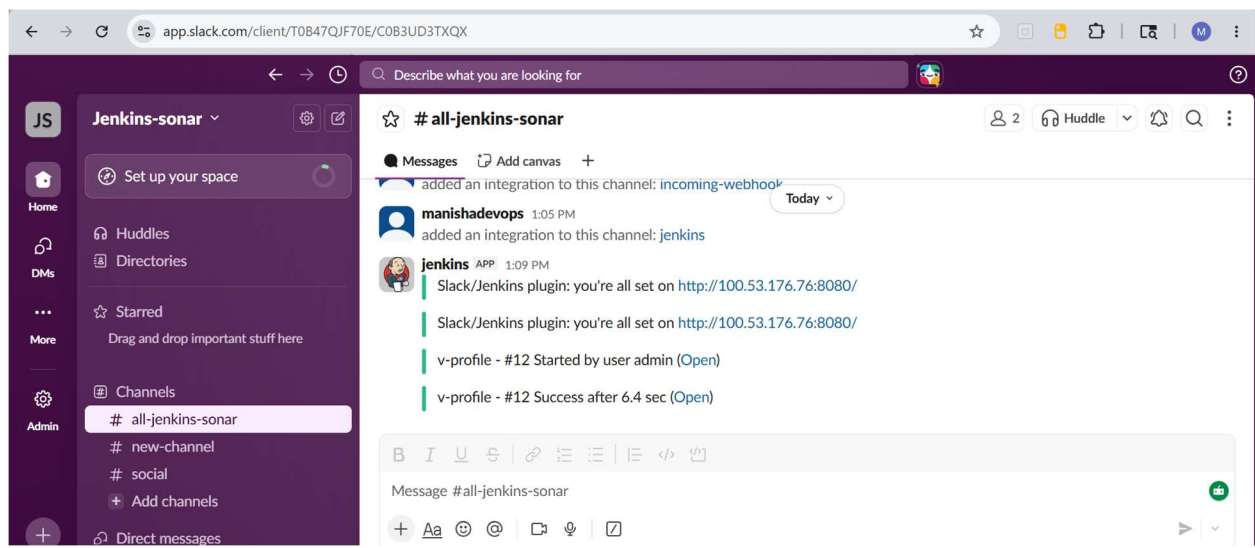

2. Create one Jenkins job using the below code and create three stages.

- **stage1:** Git clone to download the source code.
- **stage2:** Sonarqube Integration to check the quality of code.
- **stage3:** Slack Integration to send the alerts to slack.

Source Code: <https://github.com/betawins/hiring-app.git>

- create a new build

54.196.156.34:8080/view/all/newJob

Jenkins / All / New Item

New Item

Enter an item name

hiring-app

Select an item type

- Pipeline**
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.
- Freestyle project**
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

OK

Choose git and provide url

54.196.156.34:8080/job/hiring-app/configure

Jenkins / hiring-app / Configure

Configure

- General
- Source Code Management**
- Triggers
- Environment
- Build Steps
- Post-build Actions

☐ None

☒ Git ?

Repositories ?

Repository URL ?

https://github.com/betawins/hiring-app.git

Credentials ?


- none -

+ Add


Advanced

+ Add Repository


Save Apply

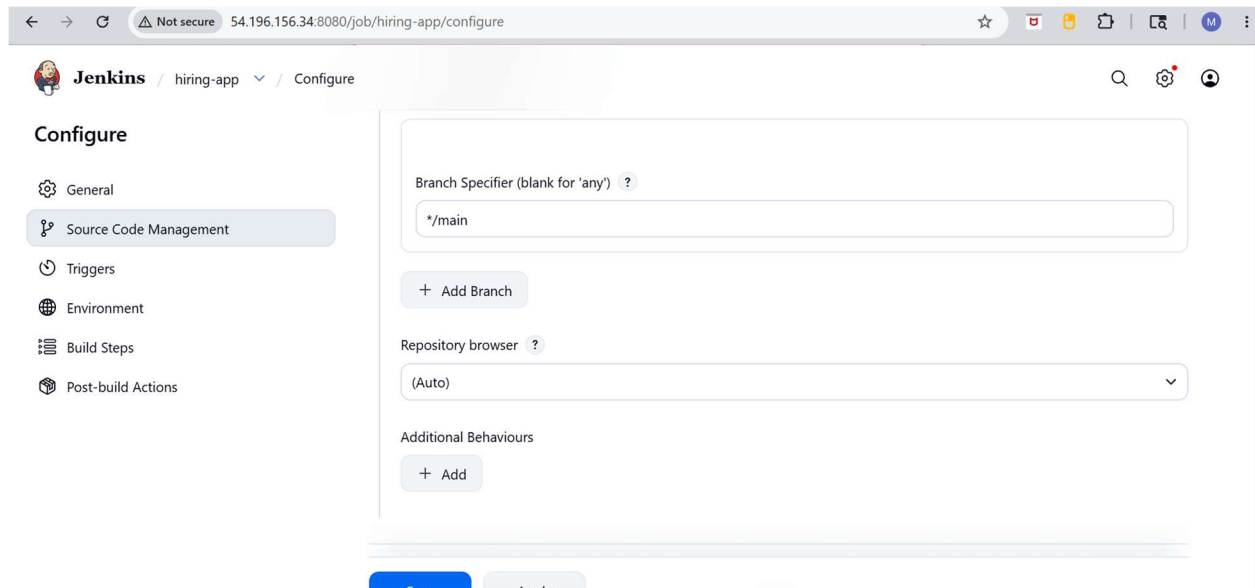


Click on add build step → choose sonarqube scanner

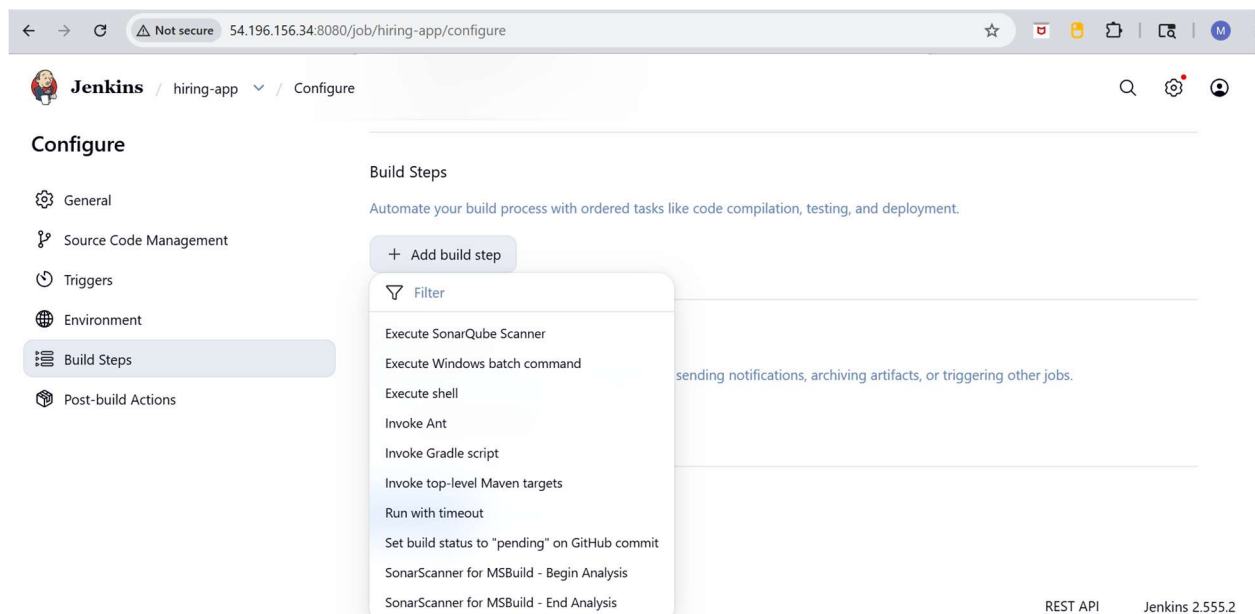

Add code in analysis properties

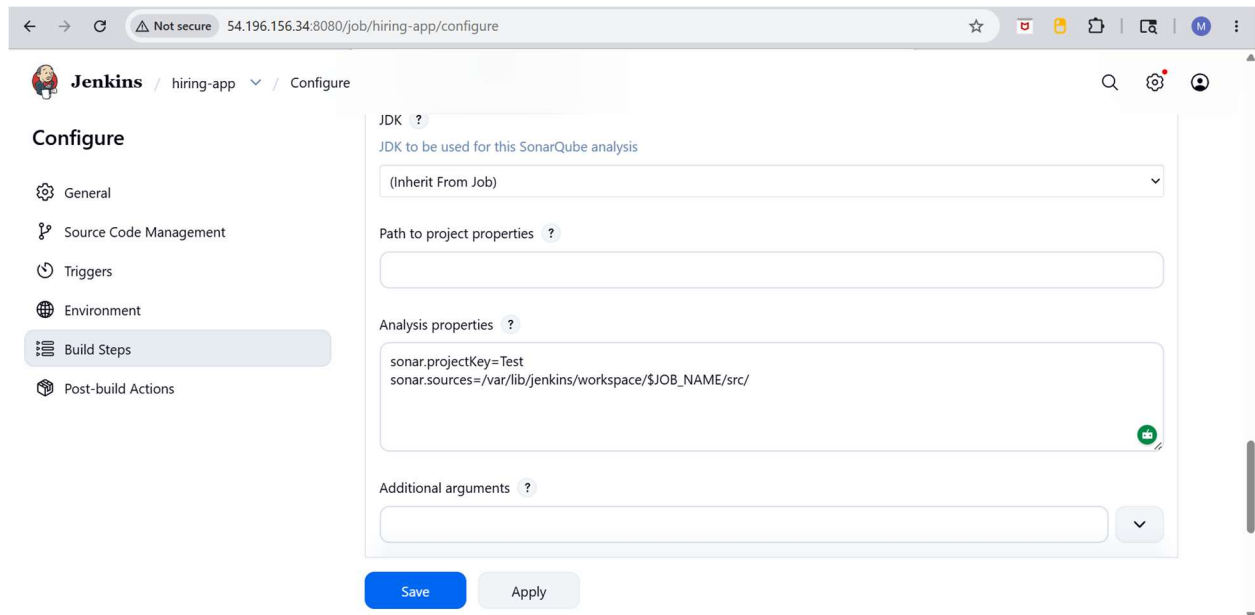

Go to post build actions → choose slack notification

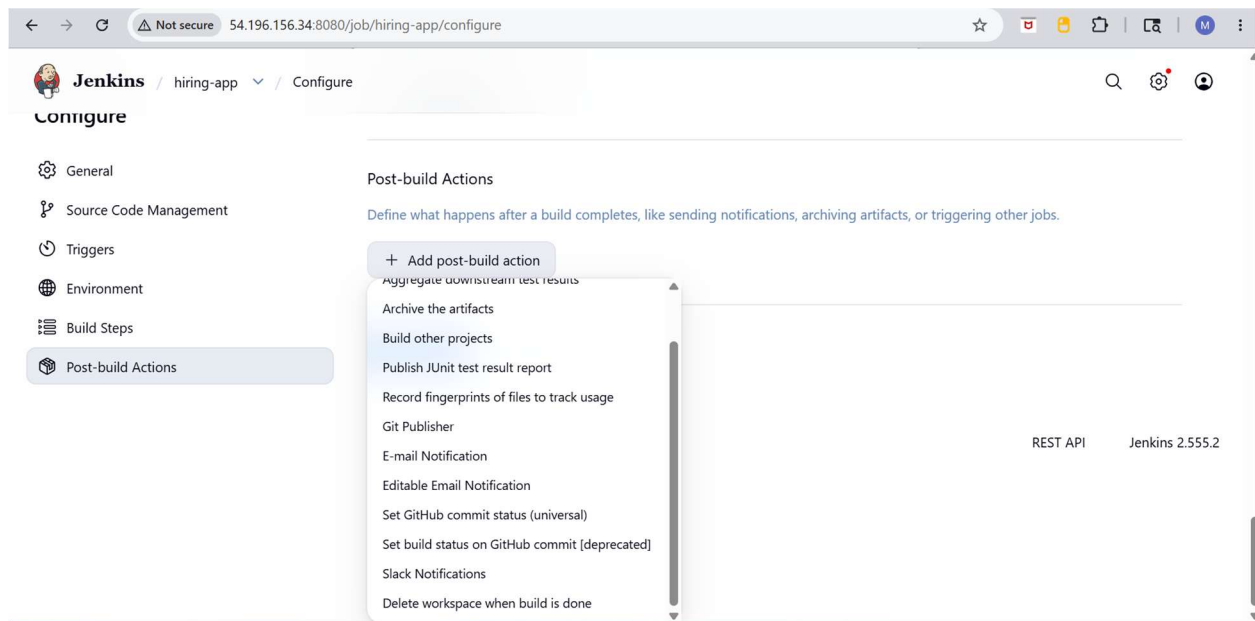

Provide workspace name → channel id → click on test connection

← → ↻ ⚠ Not secure 54.196.156.34:8080/job/hiring-app/configure ☆ 📄 🗑 📄 📄 📄 M ⋮

 **Jenkins** / hiring-app ▾ / Configure 🔍 ⚙️ 👤

Configure

- ⚙️ General
- 🔗 Source Code Management
- 🕒 Triggers
- 🌐 Environment
- 📋 Build Steps
- 🏠 Post-build Actions**

☐ Include Custom Message

Notification message includes

What commit information to include into notification message

nothing about commits ▾

☐ Upload build artifacts

Workspace ?

jenkins-sonargroup

Override url ?

Credential ?

[Save](#) [Apply](#)

← → ↻ ⚠ Not secure 54.196.156.34:8080/job/hiring-app/configure ☆ 📄 🗑 📄 📄 📄 M ⋮

 **Jenkins** / hiring-app ▾ / Configure 🔍 ⚙️ 👤

Configure

- ⚙️ General
- 🔗 Source Code Management
- 🕒 Triggers
- 🌐 Environment
- 📋 Build Steps
- 🏠 Post-build Actions**

☐ Custom slack app bot user ?

Icon Emoji ?

Username ?


Channel / member id ?

COB3UD3TXQX


Success

[Test Connection](#)


Click on build now

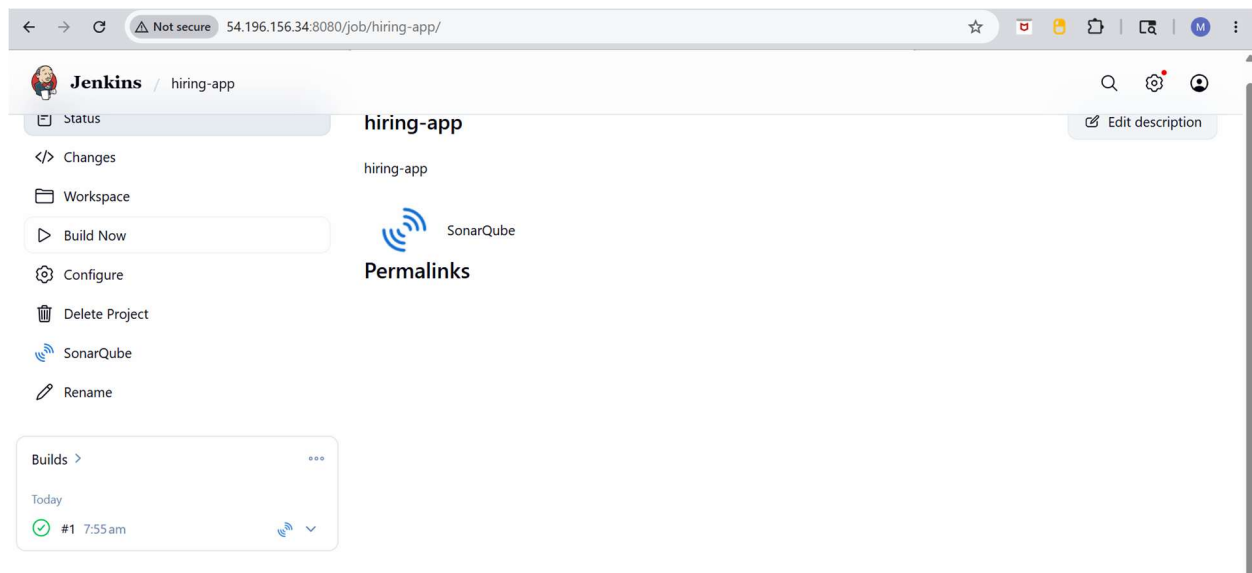

It ran successfully

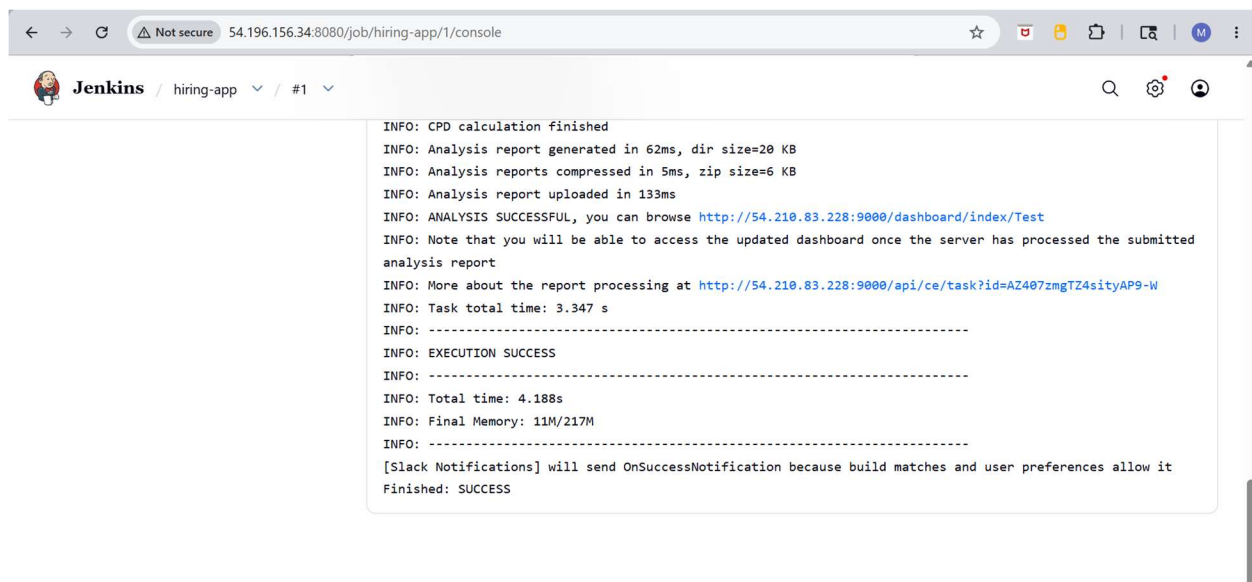

We are able to get the alerts

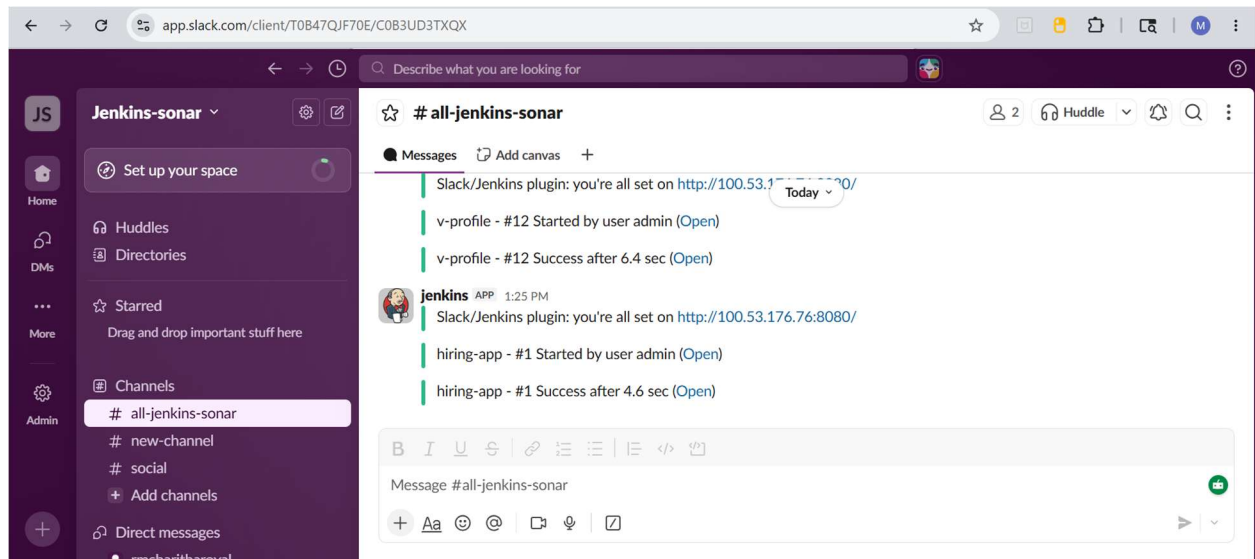

Also we can see the other project “TEST” is added in sonarqube

