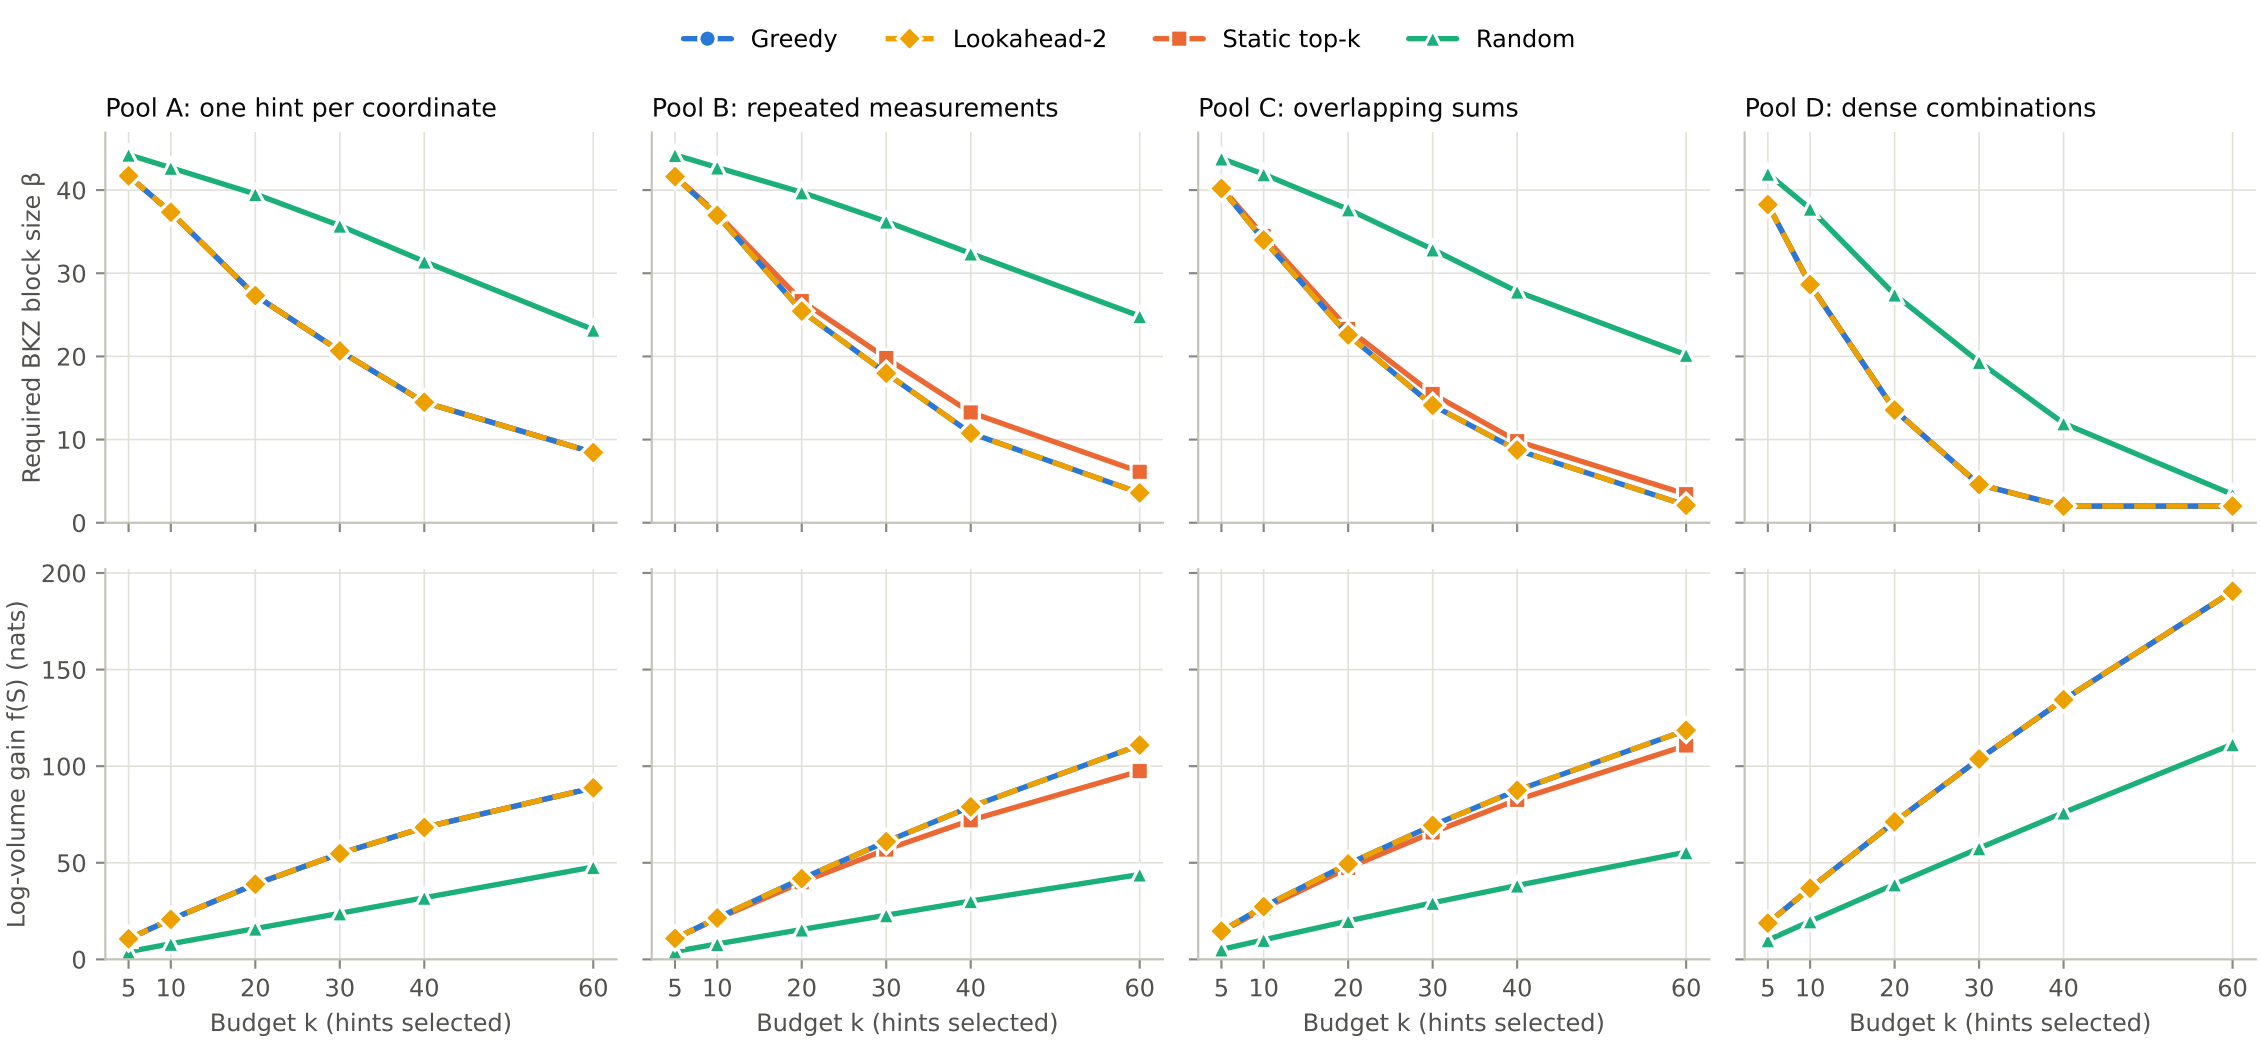
Greedy
Lookahead-2
Static top-k
Random
Pool A: one hint per coordinate
Pool B: repeated measurements
Pool C: overlapping sums
Pool D: dense combinations
Required BKZ block size β
Log-volume gain f(S) (nats)
Budget k (hints selected)
0
10
20
30
40
50
100
150
200
5
10
20
30
40
60