


Assignment 4: Version Control

1. Create a new GitHub repository.

- Clone the repository to your local machine using SSH (generate an SSH key if needed, add the public key to your GitHub account).
- Create a new branch named after your username (e.g., `Tutedude`).
- Add your Flask project files to this branch.
- Commit the changes and merge the branch into the `main` branch.

Solution 1 -

1. Copying the SSH repo key from GitHub.

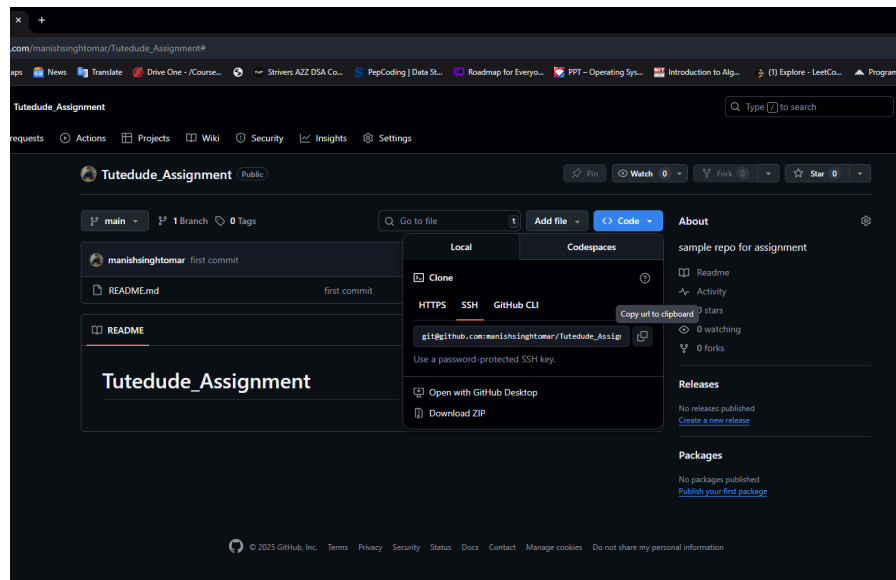

2. Cloning the repository using the git clone command.

```
Recent
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS powershell + -

PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git clone git@github.com:manishsinghtomar/Tutedude_Assignment.git
Cloning into 'Tutedude_Assignment'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 3 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4>
```

3. Creating a new branch named “manish_tomar/Tutedude”

```
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS powershell + v
• PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git clone git@github.com:manishsinghtomar/Tutedude_Assignment.git
Cloning into 'Tutedude_Assignment'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 3 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
• PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git branch manish_Tomar/Tutedude
• PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git branch -a
* main
  manish_Tomar/Tutedude
  remotes/origin/main
○ PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> |
```

4. Adding a Flask app using add . git command to this branch.

```
File Edit Selection View Go Run ... Assignment_4
EXPLORER PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
ASSIGNMENT_4
  Flask
  Tutedude_Assign...
    README.md
Tutedude_Assignment/
no changes added to commit (use "git add" and/or "git commit -a")
• PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
warning: adding embedded git repository: Tutedude_Assignment
hint: You've added another git repository inside your current repository.
hint: Clones of the outer repository will not contain the contents of
hint: the embedded repository and will not know how to obtain it.
hint: If you meant to add a submodule, use:
hint:   git submodule add <url> Tutedude_Assignment
hint:
hint: If you added this path by mistake, you can remove it from the
hint: index with:
hint:   git rm --cached Tutedude_Assignment
hint:
hint: See "git help submodule" for more information.
hint: Disable this message with "git config advice.addEmbeddedRepo false"
• PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git commit -m " flask project is added"
[manish_Tomar/Tutedude e31f4af] flask project is added
7 files changed, 182 insertions(+)
create mode 100644 Flask/app.py
create mode 100644 Flask/notes.txt
create mode 100644 Flask/tempCodeRunnerFile.py
create mode 100644 Flask/templates/form.html
create mode 100644 Flask/templates/index.html
delete mode 100644 README.md
create mode 160000 Tutedude_Assignment
○ PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> |
```


5. Commit the changes and merge the branch into the **main** branch

```
hint: See "git help submodule" for more information.
hint: Disable this message with "git config advice.addEmbeddedRepo false"
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git commit -m "flask project is added"
[manish_Tomar/Tutdude e31f4af] flask project is added
7 files changed, 182 insertions(+)
create mode 100644 Flask/app.py
create mode 100644 Flask/notes.txt
create mode 100644 Flask/tempCodeRunnerFile.py
create mode 100644 Flask/templates/form.html
create mode 100644 Flask/templates/index.html
delete mode 100644 README.md
create mode 160000 Tutdude_Assignment
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git push
fatal: The current branch manish_Tomar/Tutdude has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin manish_Tomar/Tutdude

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git push --set-upstream origin manish_Tomar/Tutdude
Enumerating objects: 10, done.
Counting objects: 100% (10/10), done.
Delta compression using up to 4 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (9/9), 2.55 KiB | 435.00 KiB/s, done.
Total 9 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Create a pull request for 'manish_Tomar/Tutdude' on GitHub by visiting:
remote:   https://github.com/manishsinghtomar/Tutdude_Assignment/pull/new/manish_Tomar/Tutdude
remote:
To github.com:manishsinghtomar/Tutdude_Assignment.git
 * [new branch]   manish_Tomar/Tutdude -> manish_Tomar/Tutdude
branch 'manish_Tomar/Tutdude' set up to track 'origin/manish_Tomar/Tutdude'.
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4>
```

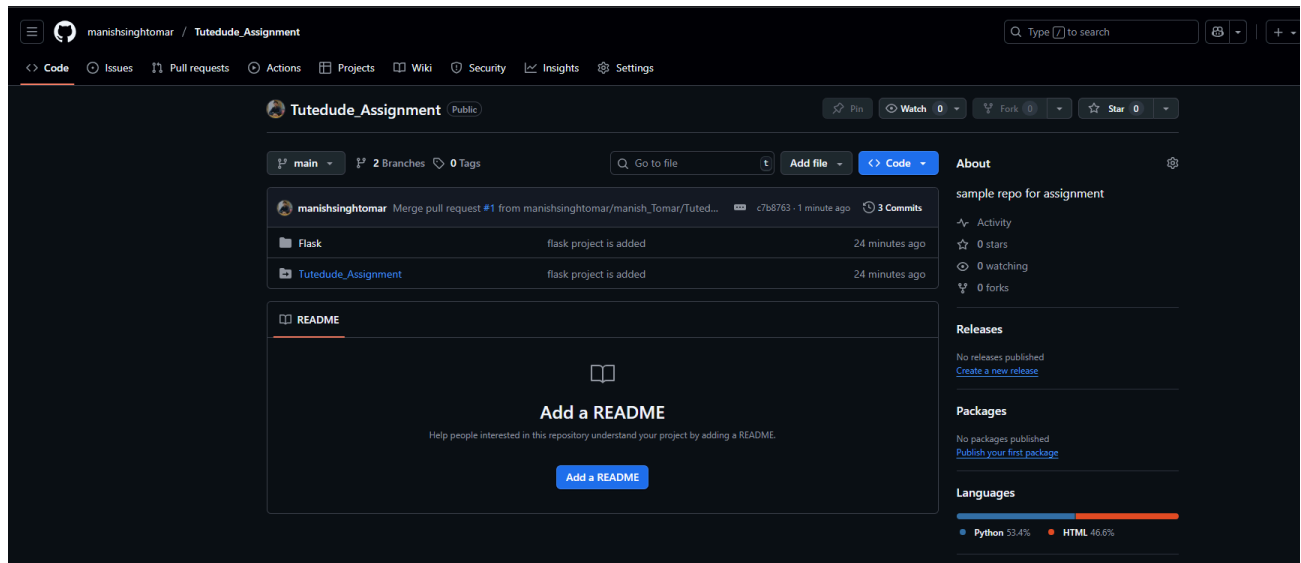


2. Create a new branch named `<your_name>_new` (e.g., `Tutedude_new`).

- Update the content of the JSON file used for the `/api` route in this branch.
- Merge the `<your_name>_new` branch into the `main` branch.
- If there are conflicts during the merge, resolve them by accepting the changes from the `<your_name>_new` branch.
- Add the resolved changes to the staging area, commit them, and push the updates to the remote repository.


Solution 2:

1. Update the content of the JSON file

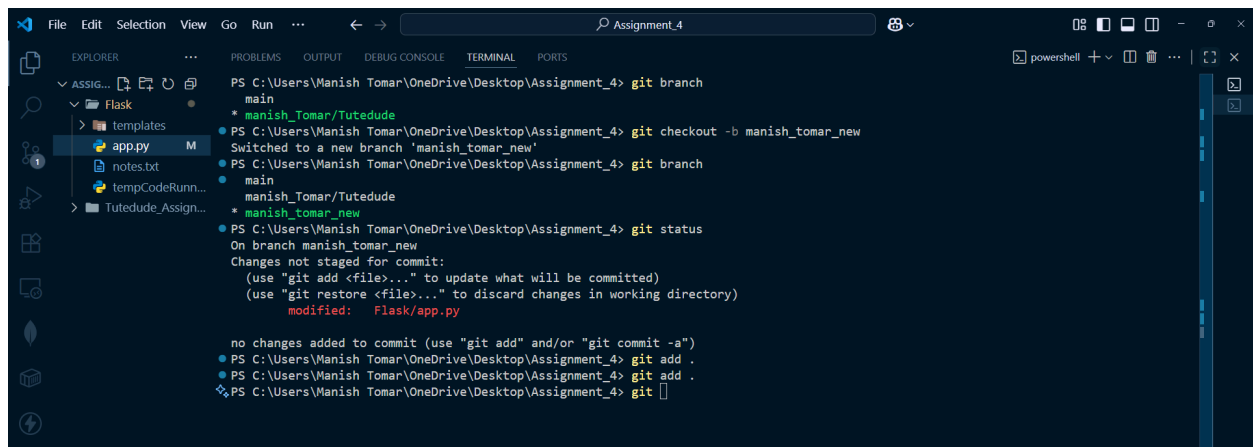

```
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git branch
main
* manish_Tomar/Tutedude
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git checkout -b manish_tomar_new
Switched to a new branch 'manish_tomar_new'
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git branch
main
manish_tomar_new
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git status
On branch manish_tomar_new
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   Flask/app.py

no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git
```

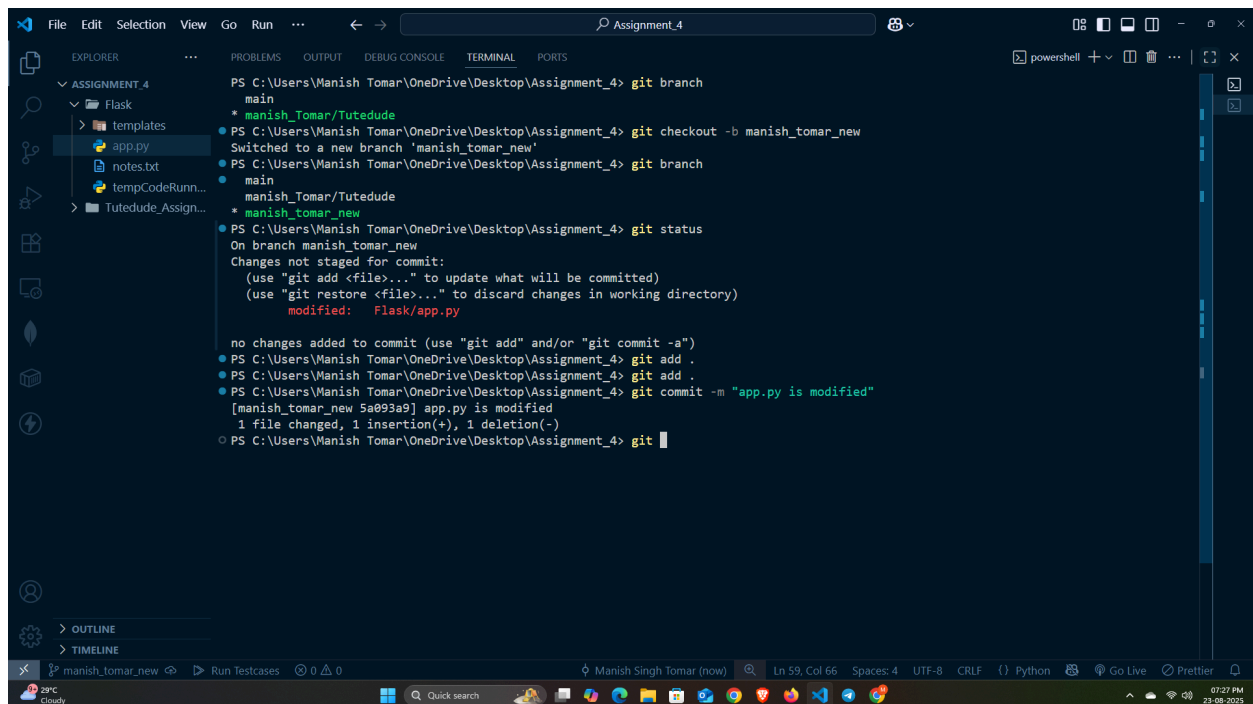

```
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git branch
main
* manish_Tomar/Tutedude
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git checkout -b manish_tomar_new
Switched to a new branch 'manish_tomar_new'
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git branch
main
manish_tomar_new
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git status
On branch manish_tomar_new
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   Flask/app.py

no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git commit -m "app.py is modified"
[manish_tomar_new 5a093a0] app.py is modified
 1 file changed, 1 insertion(+), 1 deletion(-)
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git
```

File Edit Selection View Go Run ... Assignment_4

EXPLORER

- ASSIGNMENT_4
 - Flask
 - templates
 - app.py
 - notes.txt
 - tempCodeRunn...
 - Tutedude_Assign...

TERMINAL

Changes not staged for commit:
(use "git add <file>..." to update what will be committed)
(use "git restore <file>..." to discard changes in working directory)
modified: Flask/app.py

no changes added to commit (use "git add" and/or "git commit -a")

```
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git commit -m "app.py is modified"
[manish_tomar_new 5a093a0] app.py is modified
1 file changed, 1 insertion(+), 1 deletion(-)
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git push
fatal: The current branch manish_tomar_new has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin manish_tomar_new

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.
```

PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git push --set-upstream origin manish_tomar_new

Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 4 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (4/4), 500 bytes | 250.00 KiB/s, done.
Total 4 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'manish_tomar_new' on GitHub by visiting:
remote: https://github.com/manishsinghtomar/Tutedude_Assignment/pull/new/manish_tomar_new
remote:
To github.com:manishsinghtomar/Tutedude_Assignment.git
* [new branch] manish_tomar_new -> manish_tomar_new
branch 'manish_tomar_new' set up to track 'origin/manish_tomar_new'.
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4>

manish_tomar_new Run Testcases 0 0 0 Manish Singh Tomar (now) Ln 59, Col 66 Spaces: 4 UTF-8 CRLF () Python Go Live Prettier 07:28 PM 23-08-2025

File Edit Selection View Go Run ... Assignment_4

EXPLORER

- ASSIGNMENT_4
 - Flask
 - templates
 - app.py
 - notes.txt
 - tempCodeRunn...
 - Tutedude_Assign...

TERMINAL

```
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git branch
main
* manish_Tomar/Tutedude
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git checkout -b manish_tomar_new
Switched to a new branch 'manish_tomar_new'
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git branch
main
manish_Tomar/Tutedude
* manish_tomar_new
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git status
On branch manish_tomar_new
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   Flask/app.py

no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git add .
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git commit -m "app.py is modified"
[manish_tomar_new 5a093a0] app.py is modified
1 file changed, 1 insertion(+), 1 deletion(-)
PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git push
fatal: The current branch manish_tomar_new has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin manish_tomar_new

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.
```

PS C:\Users\Manish Tomar\OneDrive\Desktop\Assignment_4> git push --set-upstream origin manish_tomar_new

Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 4 threads
Compressing objects: 100% (4/4), done.

manish_tomar_new Run Testcases 0 0 0 Manish Singh Tomar (now) Ln 59, Col 66 Spaces: 4 UTF-8 CRLF () Python Go Live Prettier 07:28 PM 23-08-2025

Visual Studio Code interface showing a Python Flask application named `app.py`. The code defines a `name1()` function that checks if a user is 18 or older and returns a welcome message. A `submit()` function is also defined to handle form submissions. The interface includes a Source Control panel on the left showing a pull request for `manish_tomar_new` and a terminal at the bottom.

```
def name1():
    from the request that the client send to the server
    name = request.values.get('name')
    age = request.values.get('age')
    # result = {
    #     'name': name,
    #     'age': age
    # }
    # return result
    age = int(age)
    if age > 18:
        return 'Welcome to the site, ' + name + '!'
    else:
        return 'Sorry, you are too young to use this site.'
```

```
@app.route('/submit', methods=['POST'])
def submit():
    # name = request.args.get('name')
    # not good practice
    # name = request.form.get('name')
    # password = request.form.get('password')
    form_data = dict(request.form)
    print(form_data)
    return form_data
# print(request.args)
```

GitHub pull request interface for the repository `manishsinghtomar / Tutude_Assignment`. The pull request is titled `app.py is modified #2` and is in the `merged` state. The interface shows the pull request details, including the commit message, the pull request description, and the pull request status. The pull request was successfully merged and closed, and the `manish_tomar_new` branch can be safely deleted. The interface also includes a comment section and a sidebar with various settings and notifications.

app.py is modified #2

manishsinghtomar merged 1 commit into `main` from `manish_tomar_new` now

Conversation

manishsinghtomar commented now

No description provided.

app.py is modified

manishsinghtomar merged commit `a238031` into `main` now

Pull request successfully merged and closed

You're all set — the `manish_tomar_new` branch can be safely deleted.



Add a comment

Write Preview

Add your comment here...

Notifications

Unsubscribe

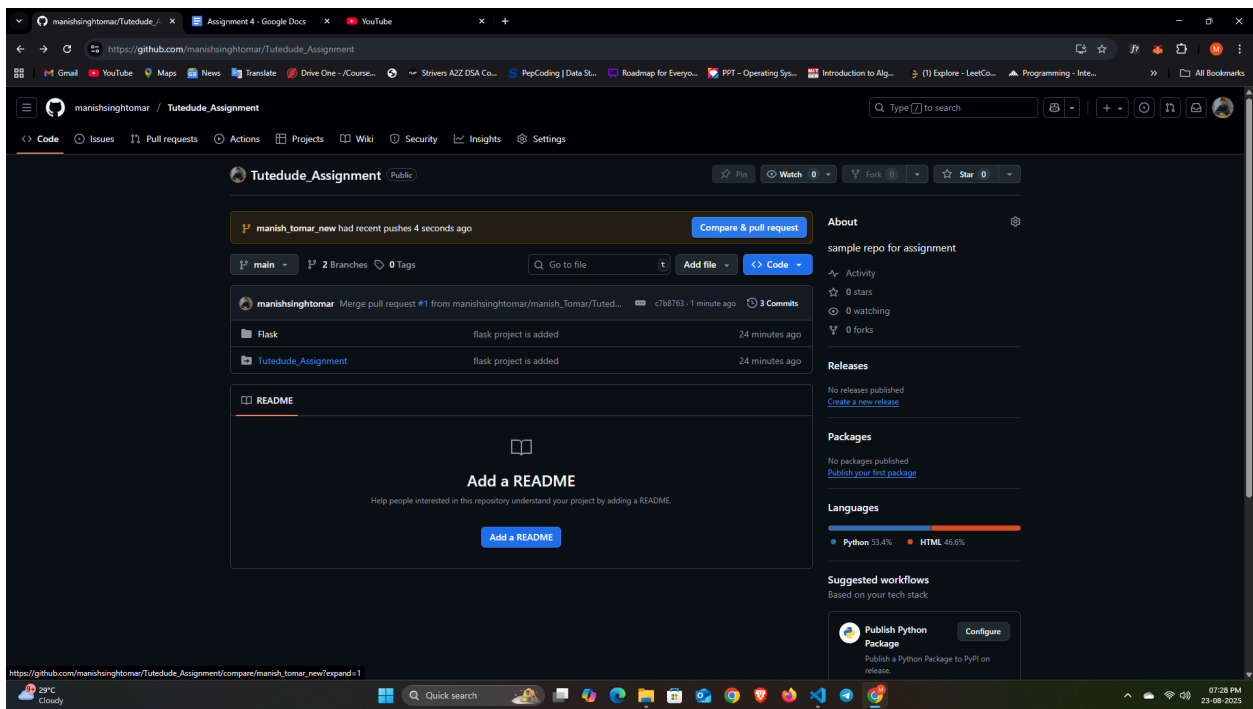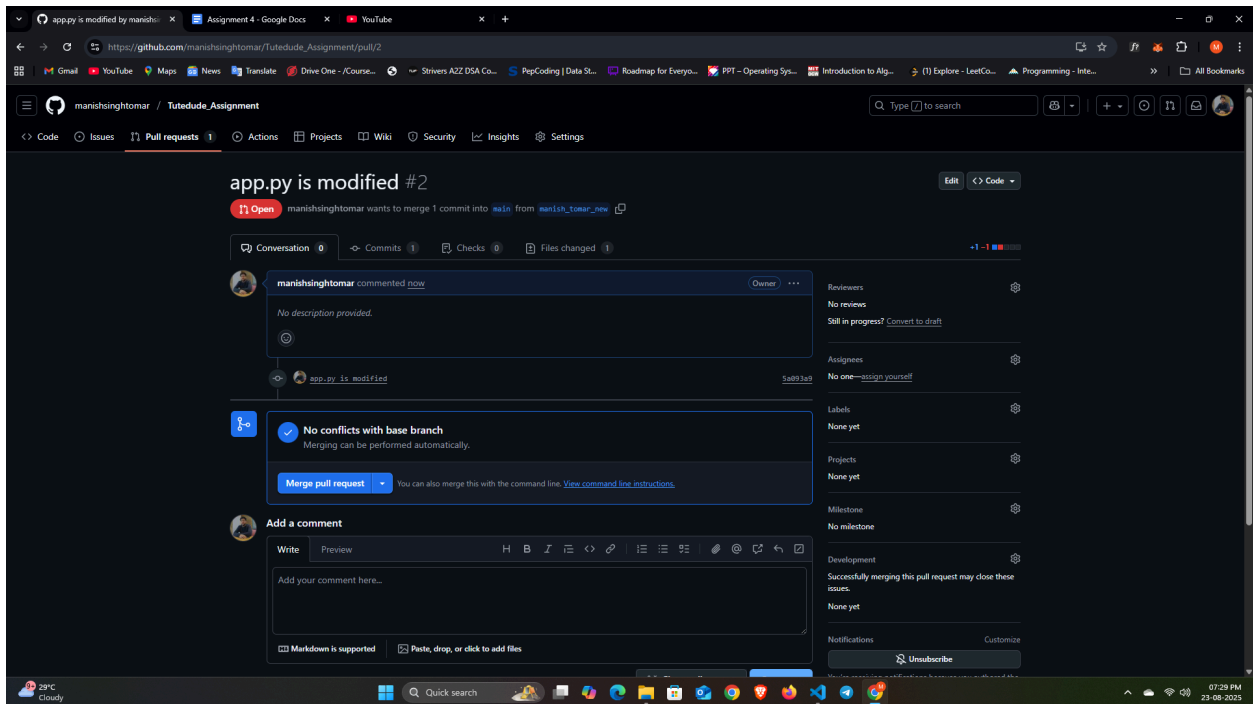


3. Branch Creation:

- Create two branches: `master_1` and `master_2` from the `main` branch.
- **Feature Development in `master_1`:**
- In the `master_1` branch, create a **To-Do Page** in the frontend.
 - The page should contain a form with the following fields:
 - **Item Name**
 - **Item Description**
- **Backend API in `master_2`:**
- In the `master_2` branch, create a backend route named `/submittodoitem`.
- This route will:
 - Accept `itemName` and `itemDescription` via a POST request.
 - Store these details in a MongoDB database.
- **Merging Changes:**
- Merge the changes from both `master_1` and `master_2` into the `main` branch.

Solution 3:

Step 1: Create a **To-Do Page** in the frontend

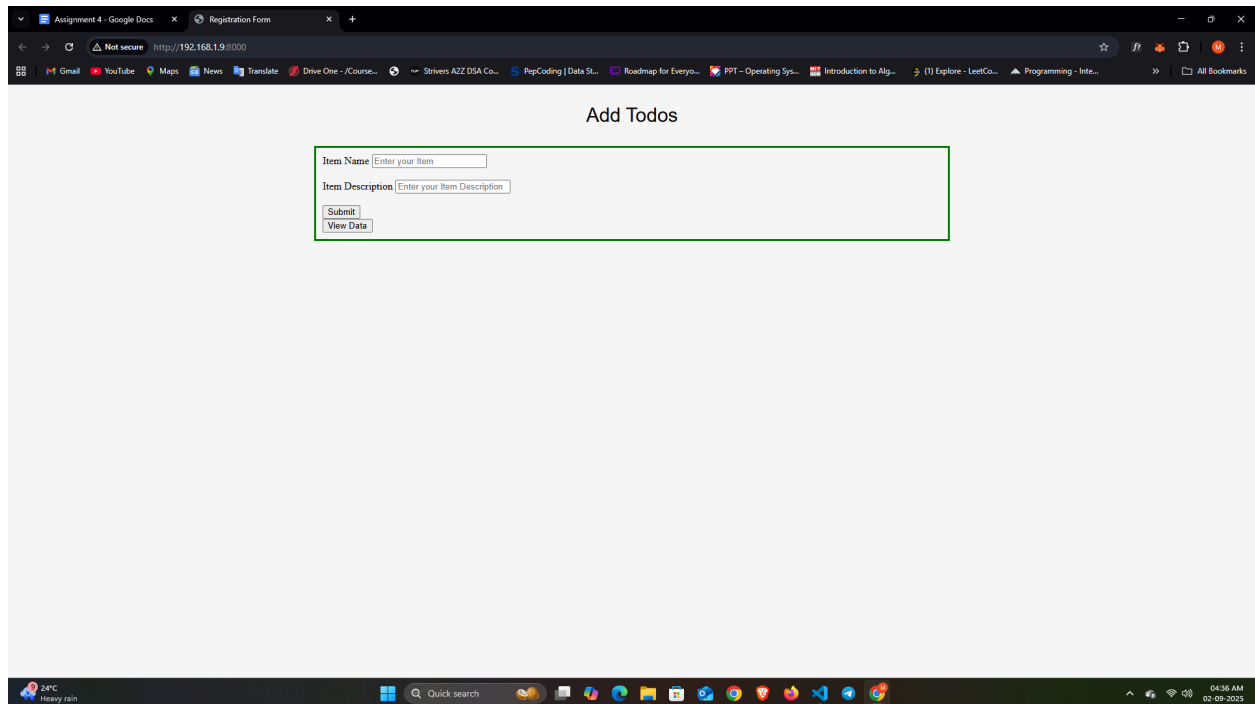

```
1 from flask import Flask, render_template, request
2
3 import requests # this module it allows you make HTTP request from inside python
4
5 BACKEND_URL = 'http://localhost:9000'
6
7 app = Flask(__name__) #instance of Flask
8
9 @app.route('/') #create route
10 def home():
11     return render_template('index.html')
12
13 @app.route('/submittodoitem', methods=['POST'])
14 def submit():
15
16     form_data = dict(request.form)
17
18     requests.post(BACKEND_URL + '/submittodoitem', json=form_data)
19
20     return 'Data submitted successfully'
21
22 @app.route('/get_data')
23 def get_data():
24
25     response = requests.get(BACKEND_URL + '/view')
26
27     data = response.json()
28
29     data['hello'] = 'world'
30
31     return data
32
33
34 if __name__ == '__main__': #good practice to run app
35
36     app.run(host='0.0.0.0',port=8000,debug=True) #debug=True look for the changes and apply changes too
```

Step 2: Create a branch named master_1 and push the Todo page.


```
PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment> git branch
* main
PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment> cd .\Frontend\
PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment\Frontend> ls

Directory: D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment\Frontend

Mode                LastWriteTime         Length Name
----                -
dar---             02-09-2025   03:57 AM             templates
-a---             02-09-2025   04:14 AM             884 app.py
-a---             07-08-2025   02:08 AM             78 requirements.txt


PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment\Frontend> git branch master_1
PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment\Frontend> git branch
* main
  master_1
PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment\Frontend> git switch master_1
Switched to branch 'master_1'
PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment\Frontend> git add .
PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment\Frontend> git commit -m 'Todo page-frontend added'
[master_1 7780673] Todo page-frontend added
 3 files changed, 110 insertions(+)
 create mode 100644 Frontend/app.py
 create mode 100644 Frontend/requirements.txt
 create mode 100644 Frontend/templates/index.html
PS D:\WRITTEN_CODE\Assignment_4\Tutude_Assignment\Frontend>
```

Step 3: Create a branch named master_2 and push the backend code.

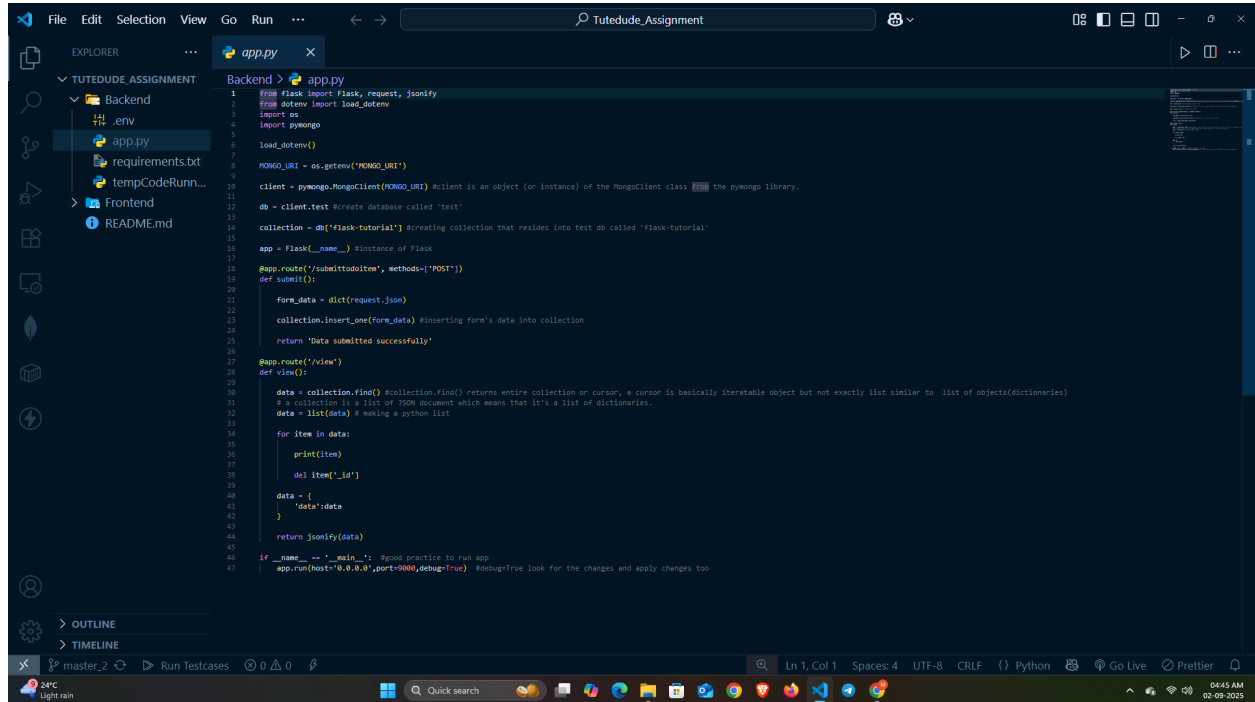

The screenshot shows the Visual Studio Code editor with the file explorer on the left displaying the project structure: TUTEDUDE_ASSIGNMENT > Backend > app.py. The main editor window shows the code for app.py, which is a Flask application. The code includes imports for Flask, request, jsonify, and pymongo, and defines routes for submitting data and viewing it. The status bar at the bottom indicates the current file is app.py, line 1, column 1, with a UTF-8 encoding and CRLF line endings.

```
1 from flask import Flask, request, jsonify
2 from dotenv import load_dotenv
3 import os
4 import pymongo
5
6 load_dotenv()
7
8 MONGO_URI = os.getenv('MONGO_URI')
9
10 client = pymongo.MongoClient(MONGO_URI) #client is an object (or instance) of the MongoClient class from the pymongo library.
11
12 db = client.test #create database called 'test'
13
14 collection = db['flask-tutorial'] #creating collection that resides into test db called 'flask-tutorial'
15
16 app = Flask(__name__) #instance of flask
17
18 @app.route('/submitdata', methods=['POST'])
19 def submit():
20
21     form_data = dict(request.json)
22
23     collection.insert_one(form_data) #inserting form's data into collection
24
25     return 'Data submitted successfully'
26
27 @app.route('/view')
28 def view():
29
30     data = collection.find() #collection.find() returns entire collection or cursor, a cursor is basically iterable object but not exactly list similar to list of objects(dictionaries)
31     # a collection is a list of JSON document which means that it's a list of dictionaries.
32     data = list(data) #making a python list
33
34     for item in data:
35
36         print(item)
37
38         del item['_id']
39
40     data = {
41         'data':data
42     }
43
44     return jsonify(data)
45
46 if __name__ == '__main__': #good practice to run app
47     app.run(host='0.0.0.0', port=5000, debug=True) #debug=True look for the changes and apply changes too
```

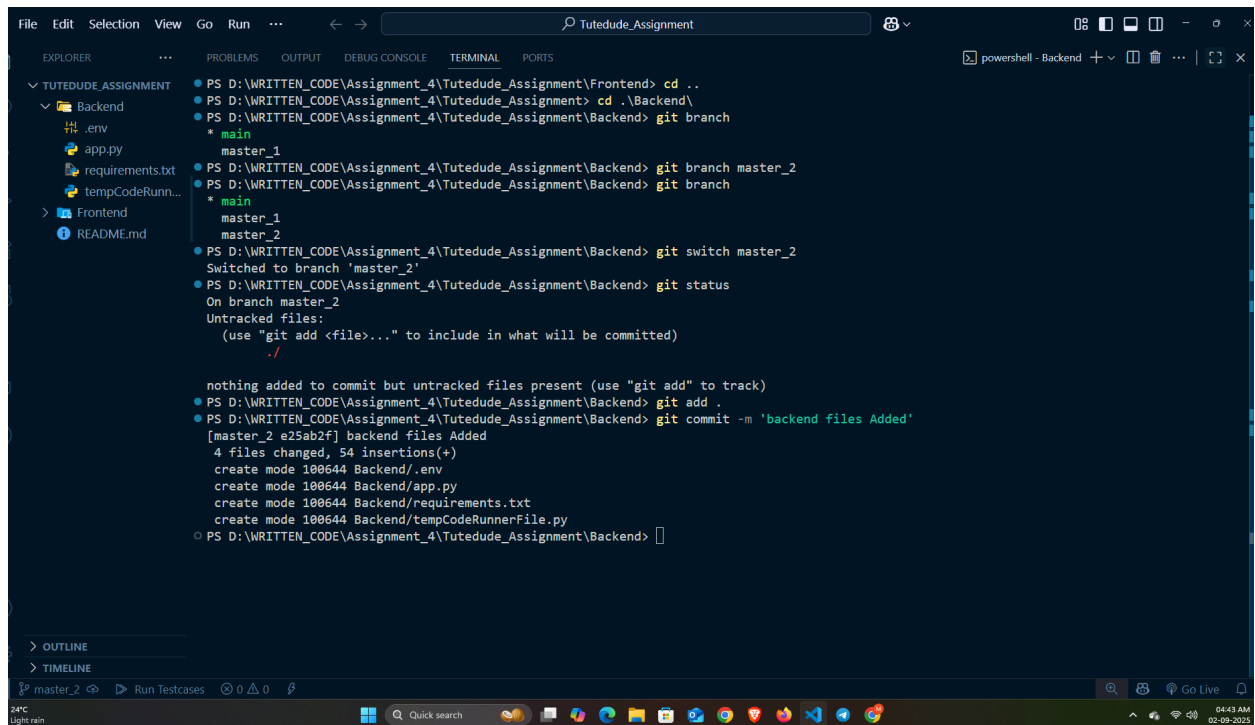

The screenshot shows the Visual Studio Code editor with the terminal window open. The terminal displays the output of a series of git commands executed in a PowerShell prompt. The commands include creating a new branch named master_2, switching to it, and committing the backend files. The output shows that the files were successfully committed to the master_2 branch.

```
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Frontend> cd ..
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> cd .\Backend\
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git branch
* master_1
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git branch master_2
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git branch
* master_1
  master_2
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git switch master_2
Switched to branch 'master_2'
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git status
On branch master_2
Untracked files:
  (use "git add <file>..." to include in what will be committed)
  ./

nothing added to commit but untracked files present (use "git add" to track)
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git add .
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git commit -m 'backend files Added'
[master_2 e25ab2f] backend files Added
4 files changed, 54 insertions(+)
 create mode 100644 Backend/app.py
 create mode 100644 Backend/.env
 create mode 100644 Backend/requirements.txt
 create mode 100644 Backend/tempCodeRunnerFile.py
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend>
```

```
File Edit Selection View Go Run ... Tutedude_Assignment
EXPLORER PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
TUTEDUDE_ASSIGNMENT
  Backend
    env
    app.py
    requirements.txt
    tempCodeRunn...
  Frontend
    README.md

nothing added to commit but untracked files present (use "git add" to track)
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git add .
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git commit -m 'backend files Added'
[master_2 e25ab2f] backend files Added
4 files changed, 54 insertions(+)
create mode 100644 Backend/.env
create mode 100644 Backend/app.py
create mode 100644 Backend/requirements.txt
create mode 100644 Backend/tempCodeRunnerFile.py
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git push
fatal: The current branch master_2 has no upstream branch.
To push the current branch and set the remote as upstream, use

    git push --set-upstream origin master_2

To have this happen automatically for branches without a tracking
upstream, see 'push.autoSetupRemote' in 'git help config'.

PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git push --set-upstream origin master_2
Enumerating objects: 8, done.
Counting objects: 100% (8/8), done.
Delta compression using up to 4 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (7/7), 1.30 KiB | 334.00 KiB/s, done.
Total 7 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'master_2' on GitHub by visiting:
remote:   https://github.com/manishsinghtomar/Tutedude_Assignment/pull/new/master_2
remote:
To github.com:manishsinghtomar/Tutedude_Assignment.git
 * [new branch]      master_2 -> master_2
branch 'master_2' set up to track 'origin/master_2'.
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend> git push
Everything up-to-date
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment\Backend>
```

manishsinghtomar / Tutedude_Assignment

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

Tutedude_Assignment Public

master_1 had recent pushes 6 minutes ago [Compare & pull request](#)

master_2 had recent pushes 1 minute ago [Compare & pull request](#)

main 5 Branches 0 Tags [Go to file](#) [Add file](#) [Code](#)

manishsinghtomar Merge pull request #2 from manishsinghtomar/manish_tomar_new x238031 · last week 5 Commits

- Flask app.py is modified last week
- Tutedude_Assignment flask project is added last week

[README](#)

Add a README

Help people interested in this repository understand your project by adding a README.

[Add a README](#)

About

sample repo for assignment

Activity

- 0 stars
- 0 watching
- 0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)

Languages

Python 33.6% HTML 66.4%

Suggested workflows

Based on your tech stack

[Django](#) [Configure](#)

Build and Test a Django Project

Step 4: merging both branches into the main branch.

This screenshot shows a GitHub pull request for the repository 'manishsinghtomar / Tutude_Assignment'. The pull request is titled 'backend files Added #3' and is in a 'Merged' state. It shows a commit from the 'master_3' branch merged into the 'main' branch. The pull request details include a conversation section with a comment from 'manishsinghtomar' stating 'No description provided.' and a commit history section showing the commit 'c709b79' merged into 'main'. The right sidebar contains metadata such as 'No reviews', 'Still in progress? Convert to draft', 'No one—assign yourself', 'None yet' for labels, projects, milestones, and development. A 'Delete branch' button is visible. The bottom of the screen shows a Windows taskbar with a weather widget indicating 24°C and light rain, and a system clock showing 04:46 AM on 02-09-2025.

This screenshot shows a GitHub pull request for the repository 'manishsinghtomar / Tutude_Assignment'. The pull request is titled 'Todo page-frontend added #4' and is in a 'Merged' state. It shows a commit from the 'master_1' branch merged into the 'main' branch. The pull request details include a conversation section with a comment from 'manishsinghtomar' stating 'No description provided.' and a commit history section showing the commit 'f2ec49f' merged into 'main'. The right sidebar contains metadata such as 'No reviews', 'Still in progress? Convert to draft', 'No one—assign yourself', 'None yet' for labels, projects, milestones, and development. A 'Delete branch' button is visible. The bottom of the screen shows a Windows taskbar with a weather widget indicating 24°C and light rain, and a system clock showing 04:47 AM on 02-09-2025.

4. Enhancing the To-Do Form in `master_1`:

- In the `master_1` branch, add the following fields to the To-Do form:
 - **Item ID**
 - **Item UUID**
 - **Item Hash**
 - **Committing in Sequence:**
 - Add and commit each field separately in the following order:
 - **First commit:** Add **Item ID** field.
 - **Second commit:** Add **Item UUID** field.
 - **Third commit:** Add **Item Hash** field.
 - **Merging to `main`:**
 - Merge the `master_1` branch into the `main` branch.
 - **Git Reset and Commit Deletion:**
 - In the `main` branch, use **Git Reset** to roll back to the commit where only the **Item ID** field was added.
 - Use `git reset --soft` to ensure changes remain staged.
 - Re-commit this state to the `main` branch.
 - Merge this updated state to the `main` branch.
 - **Rebasing Changes:**
 - Rebase the updated changes in the `main` branch to the `master_1` branch.
- Clarification:**
- During rebasing, **preserve individual commits** to maintain the commit history for each change (i.e., do not squash commits).
 - Use `git rebase main master_1` to integrate changes from the `main` branch back into the `master_1` branch.


Solution 4:

Step 1: add the following fields to the To-Do form:

- **Item ID**
- **Item UUID**
- **Item Hash**

In above sequence:

- **First commit:** Add **Item ID** field.
- **Second commit:** Add **Item UUID** field.
- **Third commit:** Add **Item Hash** field.

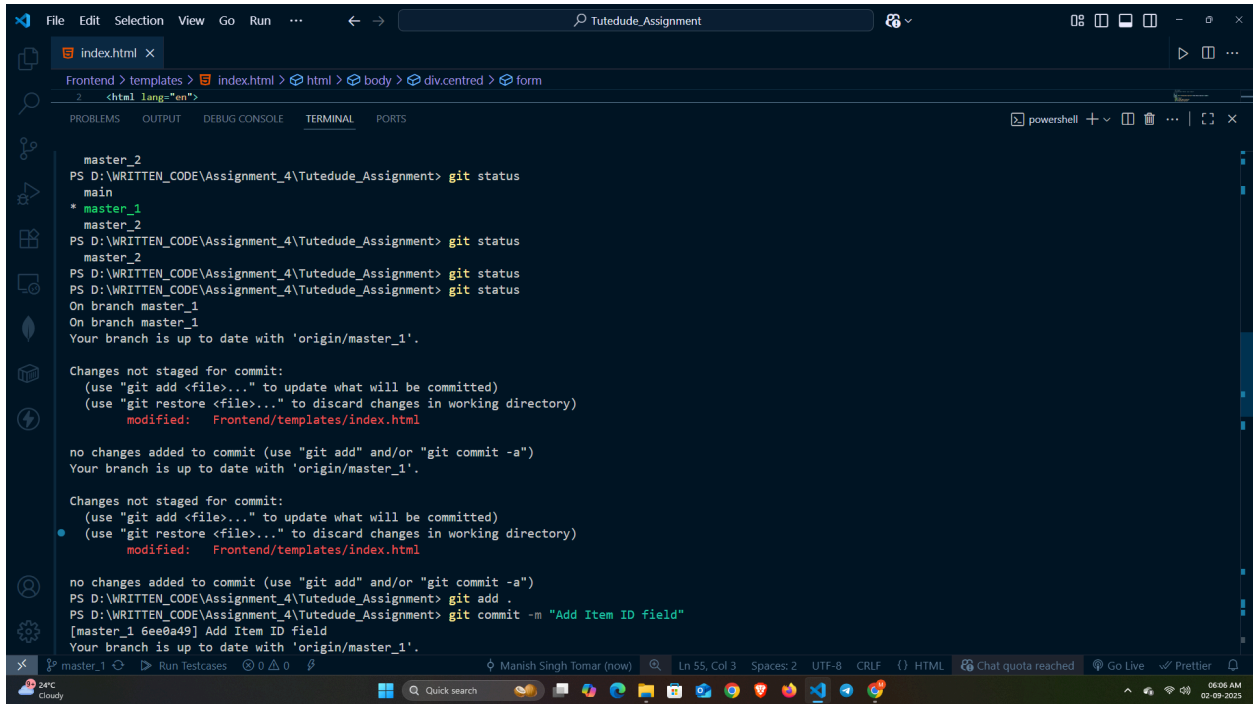

The screenshot shows a Visual Studio Code editor with a terminal window open. The terminal is running a series of git commands in a PowerShell environment. The commands and their outputs are as follows:

```
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git status
main
* master_1
* master_2
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git status
master_2
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git status
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git status
On branch master_1
On branch master_1
Your branch is up to date with 'origin/master_1'.


Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   Frontend/templates/index.html

no changes added to commit (use "git add" and/or "git commit -a")
Your branch is up to date with 'origin/master_1'.

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   Frontend/templates/index.html

no changes added to commit (use "git add" and/or "git commit -a")
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git add .
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git commit -m "Add Item ID field"
[master_1 6ee0a49] Add Item ID field
Your branch is up to date with 'origin/master_1'.
```

Step 2: After adding the above features, merge the master_1 into the main branch.

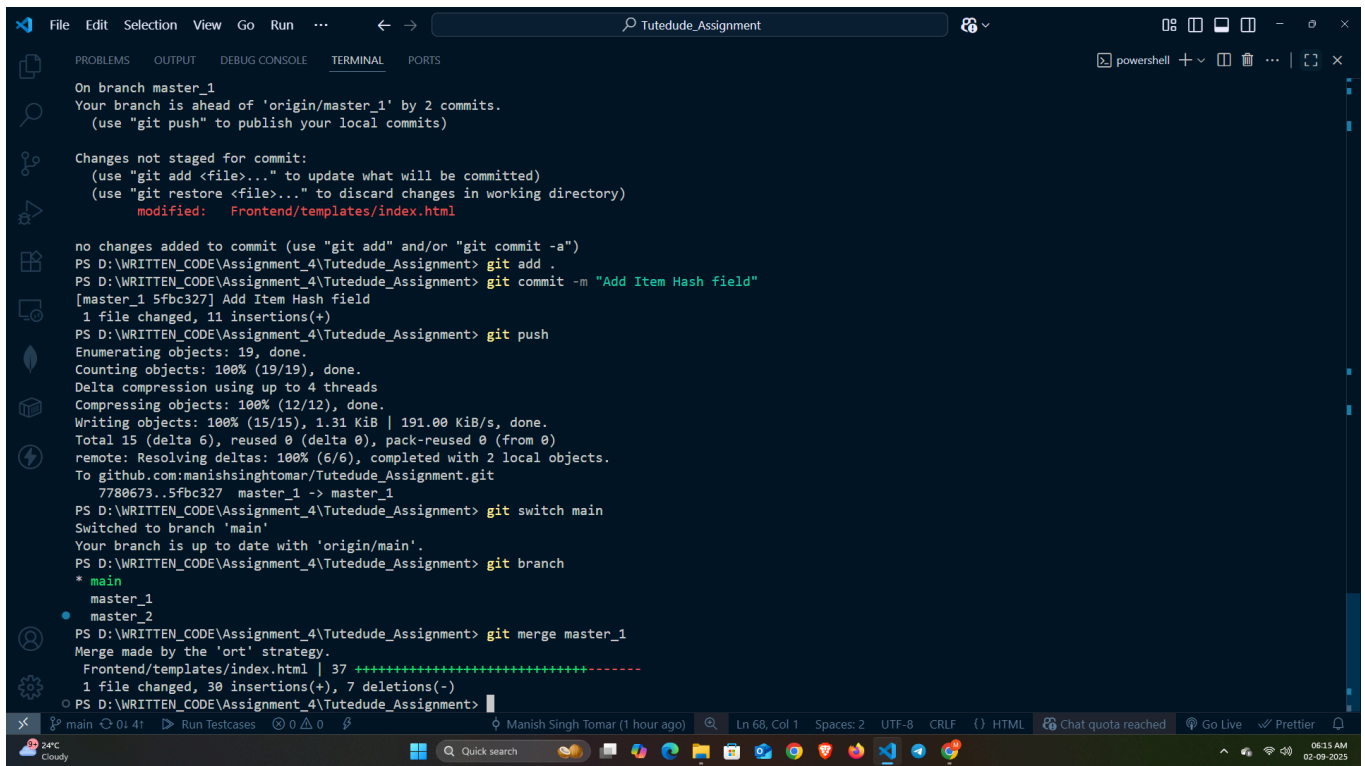

The screenshot shows a Visual Studio Code editor with a terminal window open. The terminal is running a series of git commands in a PowerShell environment. The commands and their outputs are as follows:

```
On branch master_1
Your branch is ahead of 'origin/master_1' by 2 commits.
  (use "git push" to publish your local commits)

Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   Frontend/templates/index.html

no changes added to commit (use "git add" and/or "git commit -a")
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git add .
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git commit -m "Add Item Hash field"
[master_1 5fbc327] Add Item Hash field
1 file changed, 11 insertions(+)
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git push
Enumerating objects: 19, done.
Counting objects: 100% (19/19), done.
Delta compression using up to 4 threads
Compressing objects: 100% (12/12), done.
Writing objects: 100% (15/15), 1.31 KiB | 191.00 KiB/s, done.
Total 15 (delta 6), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (6/6), completed with 2 local objects.
To github.com:manishsinghtomar/Tutedude_Assignment.git
  7780673..5fbc327  master_1 -> master_1
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git switch main
Switched to branch 'main'
Your branch is up to date with 'origin/main'.
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git branch
* main
  master_1
  master_2
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git merge master_1
Merge made by the 'ort' strategy.
Frontend/templates/index.html | 37 ++++++++
1 file changed, 30 insertions(+), 7 deletions(-)
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment>
```

```
File Edit Selection View Go Run ... Tutedude_Assignment
EXPLORER index.html M X
TUTEDUDE_ASSIGNMENT Frontend > templates > index.html > html > body > div.centred > form
index.html M X
app.py
requirements.txt
README.md
OUTLINE
TIMELINE

<html lang="en">
<body>
  <div class="centred">
    <form action="/submit" method="POST">
      <input
        id="item_description"
        placeholder="Enter your Item Description"
      />
      <br />
      <label for="Item_ID">Item ID</label>
      <input
        type="text"
        name="Item_ID"
        id="Item_ID"
        placeholder="Enter Item ID"
      />
      <br />
      <label for="Item_UUID">Item UUID</label>
      <input
        type="text"
        name="Item_UUID"
        id="Item_UUID"
        placeholder="Enter Item UUID"
      />
      <br />
      <label for="Item_Hash">Item Hash</label>
      <input
        type="text"
        name="Item_Hash"
        id="Item_Hash"
        placeholder="Enter Item Hash"
      />
      <br />
    </form>
  </div>
</body>
</html>
```

Assignment 4 - Google Docs x Registration Form x

Not secure http://192.168.1.9:3000

Item Name Enter your Item

Item Description Enter your Item Description

Item ID Enter Item ID

Item UUID Enter Item UUID


Item Hash Enter Item Hash

Submit

View Data

Step 3: Use `git reset --soft` to ensure changes remain staged.

- Re-commit this state to the `main` branch.
- Merge this updated state to the `main` branch.

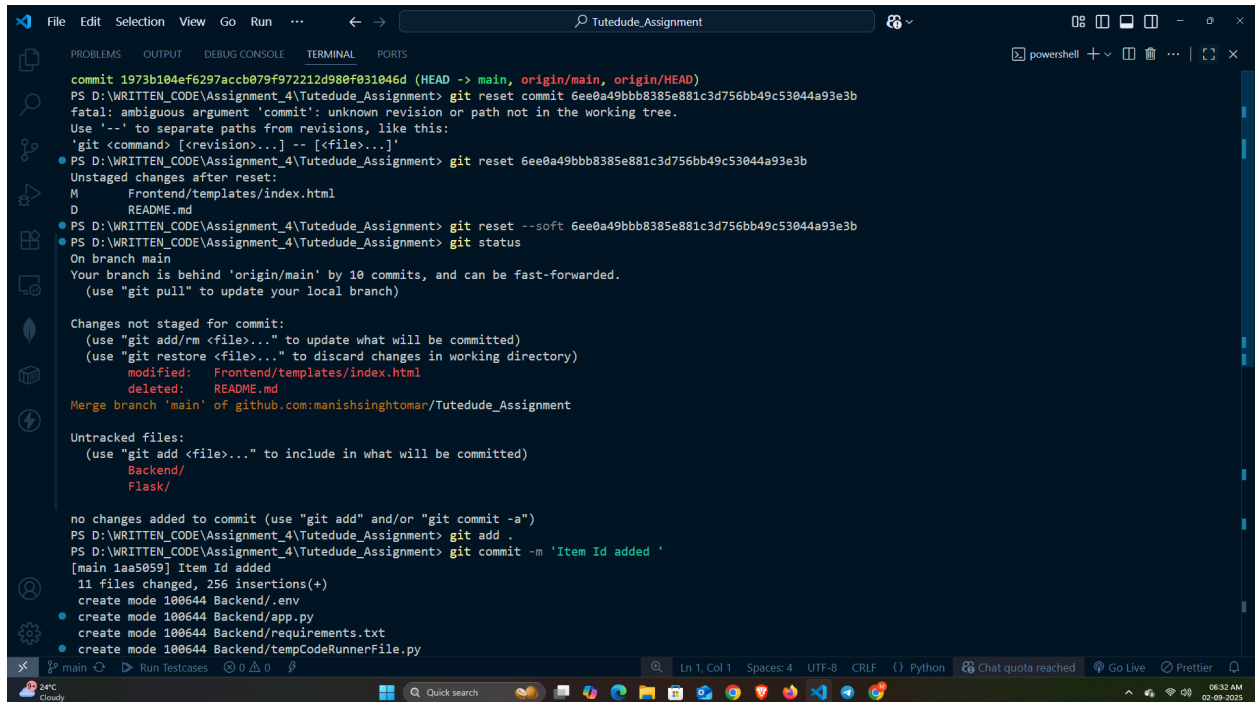


```
commit 1973b104ef6297accb079f972212d980f031046d (HEAD -> main, origin/main, origin/HEAD)
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git reset commit 6ee0a49bbb8385e881c3d756bb49c53044a93e3b
fatal: ambiguous argument 'commit': unknown revision or path not in the working tree.
Use '--' to separate paths from revisions, like this:
'git <command> [<revision>...] -- [<file>...]'
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git reset 6ee0a49bbb8385e881c3d756bb49c53044a93e3b
Unstaged changes after reset:
M   Frontend/templates/index.html
D   README.md
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git reset --soft 6ee0a49bbb8385e881c3d756bb49c53044a93e3b
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git status
On branch main
Your branch is behind 'origin/main' by 10 commits, and can be fast-forwarded.
(use "git pull" to update your local branch)

Changes not staged for commit:
  (use "git add/rm <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   Frontend/templates/index.html
        deleted:    README.md

Merge branch 'main' of github.com:manishsinghtomar/Tutudude_Assignment


Untracked files:
  (use "git add <file>..." to include in what will be committed)
        Backend/
        Flask/

no changes added to commit (use "git add" and/or "git commit -a")
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git add .
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git commit -m 'Item Id added'
[main 1aa5059] Item Id added
11 files changed, 256 insertions(+)
create mode 100644 Backend/.env
create mode 100644 Backend/app.py
create mode 100644 Backend/requirements.txt
create mode 100644 Backend/tempCodeRunnerFile.py
```

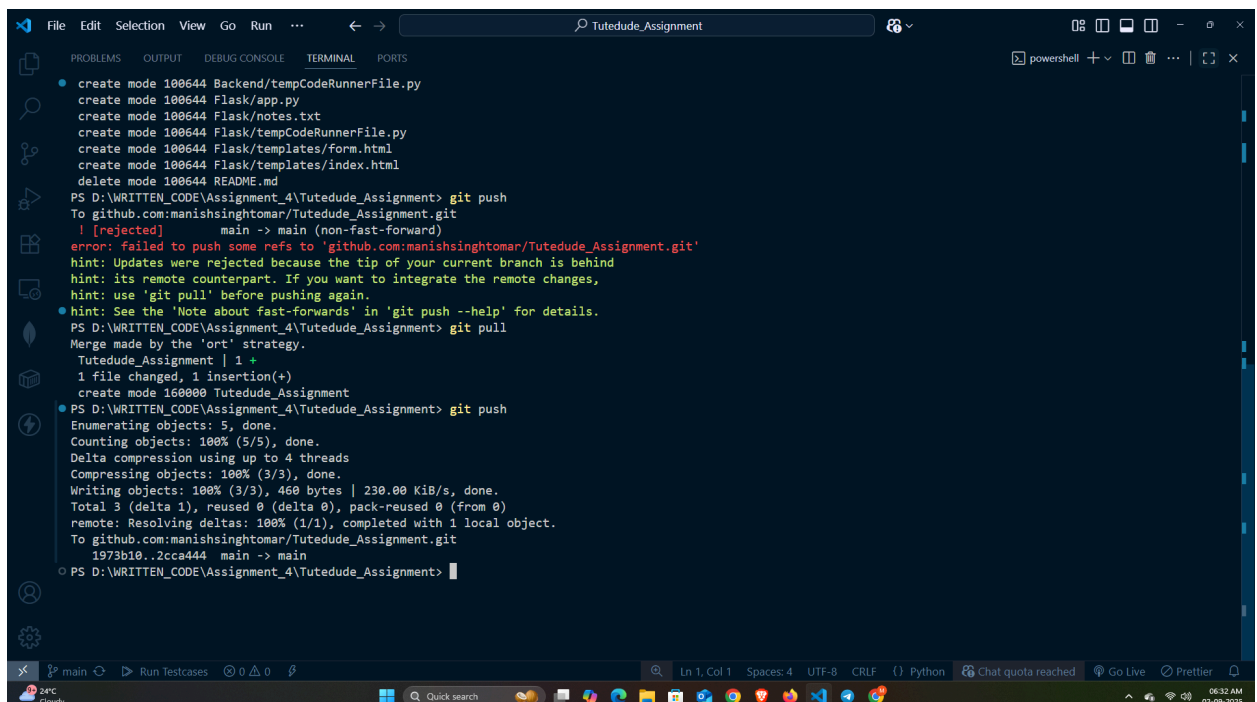

```
create mode 100644 Backend/tempCodeRunnerFile.py
create mode 100644 Flask/app.py
create mode 100644 Flask/notes.txt
create mode 100644 Flask/tempCodeRunnerFile.py
create mode 100644 Flask/templates/form.html
create mode 100644 Flask/templates/index.html
delete mode 100644 README.md
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git push
To github.com:manishsinghtomar/Tutudude_Assignment.git
 ! [rejected]        main -> main (non-fast-forward)
error: failed to push some refs to 'github.com:manishsinghtomar/Tutudude_Assignment.git'
hint: Updates were rejected because the tip of your current branch is behind
hint: its remote counterpart. If you want to integrate the remote changes,
hint: use 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git pull
Merge made by the 'ort' strategy.
 Tutudude_Assignment | 1 +
 1 file changed, 1 insertion(+)
create mode 160000 Tutudude_Assignment
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment> git push
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 4 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 460 bytes | 230.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To github.com:manishsinghtomar/Tutudude_Assignment.git
 1973b10..2cca444  main -> main
PS D:\WRITTEN_CODE\Assignment_4\Tutudude_Assignment>
```

Step 4: Use `git rebase main master_1` to integrate changes from the `main` branch back into the `master_1` branch.

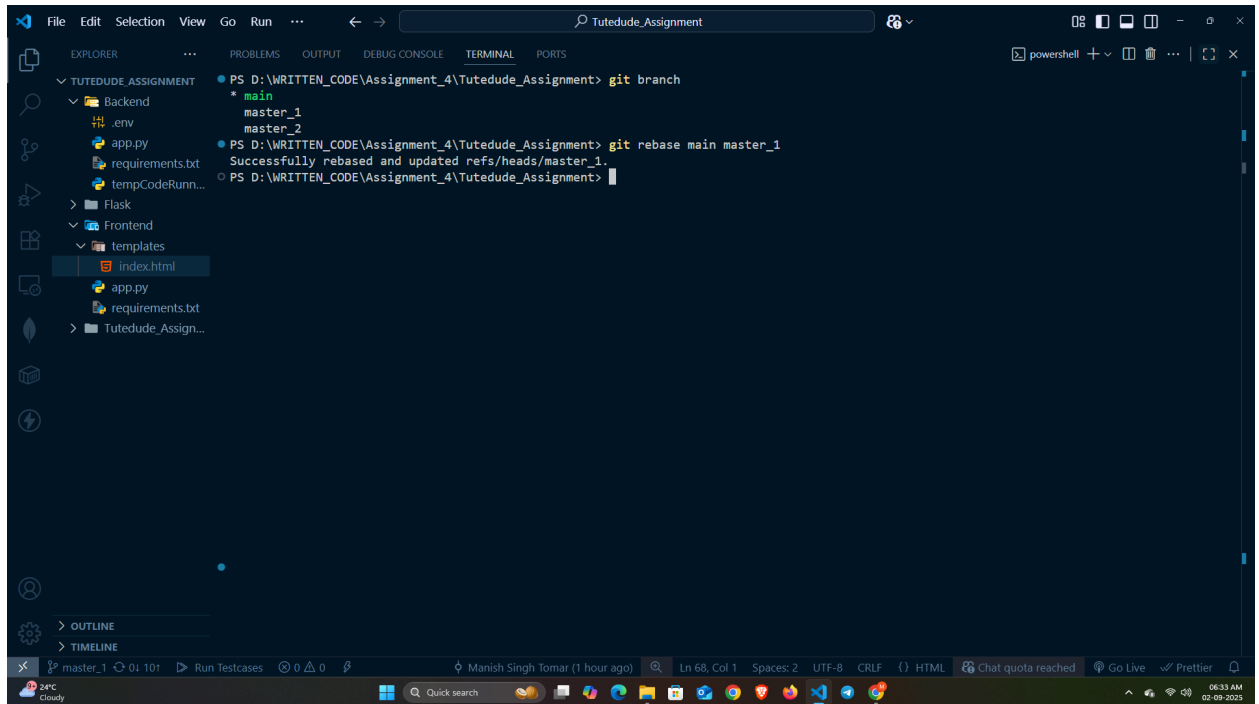

The screenshot shows the Visual Studio Code interface with a terminal window open. The terminal displays the following commands and output:

```
PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git branch
* main
  master_1
  master_2

PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment> git rebase main master_1
Successfully rebased and updated refs/heads/master_1.

PS D:\WRITTEN_CODE\Assignment_4\Tutedude_Assignment>
```

The file explorer on the left shows the project structure:

- TUTEDUDE_ASSIGNMENT
 - Backend
 - .env
 - app.py
 - requirements.txt
 - tempCodeRun...
 - Flask
 - Frontend
 - templates
 - index.html
 - app.py
 - requirements.txt
 - Tutedude_Assign...

The status bar at the bottom indicates the current branch is `master_1` with 0 changes. The system tray shows the time as 06:33 AM on 02-09-2023.