



WIKIPEDIA
The Free Encyclopedia

[Main page](#)
[Contents](#)
[Featured content](#)
[Current events](#)
[Random article](#)
[Donate to Wikipedia](#)
[Wikipedia store](#)

[Interaction](#)
[Help](#)
[About Wikipedia](#)
[Community portal](#)
[Recent changes](#)
[Contact page](#)

[Tools](#)
[What links here](#)
[Related changes](#)
[Upload file](#)
[Special pages](#)
[Permanent link](#)
[Page information](#)
[Wikidata item](#)
[Cite this page](#)

[Print/export](#)
[Create a book](#)
[Download as PDF](#)
[Printable version](#)

[Languages](#)
[Čeština](#)
[Deutsch](#)
[Français](#)
[Italiano](#)
[Polski](#)
[Русский](#)
[Simple English](#)
[Edit links](#)

[Create account](#) [Log in](#)

[Article](#) [Talk](#)

[Read](#) [Edit](#) [View history](#)

Search

Ambient occlusion

From Wikipedia, the free encyclopedia

In computer graphics, **ambient occlusion** is a shading and [rendering technique](#) used to calculate how exposed each point in a scene is to [ambient lighting](#). The interior of a tube is typically more occluded (and hence darker) than the exposed outer surfaces, and the deeper you go inside the tube, the more occluded (and darker) the lighting becomes.

Ambient occlusion can be seen as an accessibility value that is calculated for each surface point.^[1] In scenes with open sky this is done by estimating the amount of visible sky for each point, while in indoor environments only objects within a certain radius are taken into account and the walls are assumed to be the origin of the ambient light. The result is a diffuse, non-directional shading effect that casts no clear shadows but that darkens enclosed and sheltered areas and can affect the rendered image's overall tone. It is often used as a post-processing effect.

Unlike local methods such as [Phong shading](#), ambient occlusion is a global method, meaning that the illumination at each point is a function of other geometry in the scene. However, it is a very crude approximation to full [global illumination](#). The appearance achieved by ambient occlusion alone is similar to the way an object might appear on an overcast day.

Contents [\[hide\]](#)

- [1 Implementation](#)
- [2 Recognition](#)
- [3 See also](#)
- [4 References](#)
- [5 External links](#)

Implementation [\[edit\]](#)

In real-time applications, such as computer games, [Screen space ambient occlusion](#) can be used as a faster approximation of true ambient occlusion, using pixel depth rather than scene geometry to form an ambient occlusion map. However, newer technologies are making true ambient occlusion feasible even in real-time.^[*citation needed*]


Ambient occlusion is related to accessibility shading, which determines appearance based on how easy it is for a surface to be touched by various elements (e.g., dirt, light, etc.). It has been popularized in production animation due to its relative simplicity and efficiency. In the industry, ambient occlusion is often referred to as "sky light".^[*citation needed*]

The ambient occlusion shading model has the nice property of offering a better perception of the 3D shape of the displayed objects. This was shown in a paper where the authors report the results of perceptual experiments showing that depth discrimination under diffuse uniform sky lighting is superior to that predicted by a direct lighting model.^[2]

The occlusion $A_{\bar{p}}$ at a point \bar{p} on a surface with normal \hat{n} can be computed by integrating the visibility function over the hemisphere Ω with respect to projected solid angle:

$$A_{\bar{p}} = \frac{1}{\pi} \int_{\Omega} V_{\bar{p},\hat{\omega}}(\hat{n} \cdot \hat{\omega}) \, d\omega$$

where $V_{\bar{p},\hat{\omega}}$ is the visibility function at \bar{p} , defined to be zero if \bar{p} is occluded in the direction $\hat{\omega}$ and one

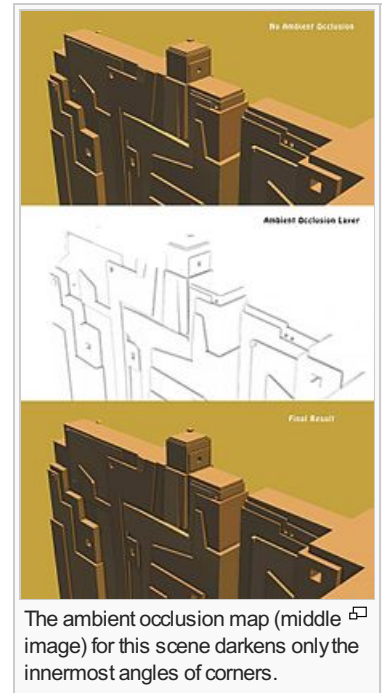


The ambient occlusion map (middle image) for this scene darkens only the innermost angles of corners.



3D animation of ambient occlusion

otherwise, and $d\omega$ is the infinitesimal [solid angle](#) step of the integration variable $\hat{\omega}$. A variety of techniques are used to approximate this integral in practice: perhaps the most straightforward way is to use the [Monte Carlo method](#) by casting rays from the point \bar{p} and testing for intersection with other scene geometry (i.e., [ray casting](#)). Another approach (more suited to hardware acceleration) is to render the view from \bar{p} by rasterizing black geometry against a white background and taking the (cosine-weighted) average of rasterized fragments. This approach is an example of a "gathering" or "inside-out" approach, whereas other algorithms (such as depth-map ambient occlusion) employ "scattering" or "outside-in" techniques.

In addition to the ambient occlusion value, a "bent normal" vector \hat{n}_b is often generated, which points in the average direction of unoccluded samples. The bent normal can be used to look up incident [radiance](#) from an [environment map](#) to approximate image-based lighting. However, there are some situations in which the direction of the bent normal is a misrepresentation of the dominant direction of illumination, e.g.,

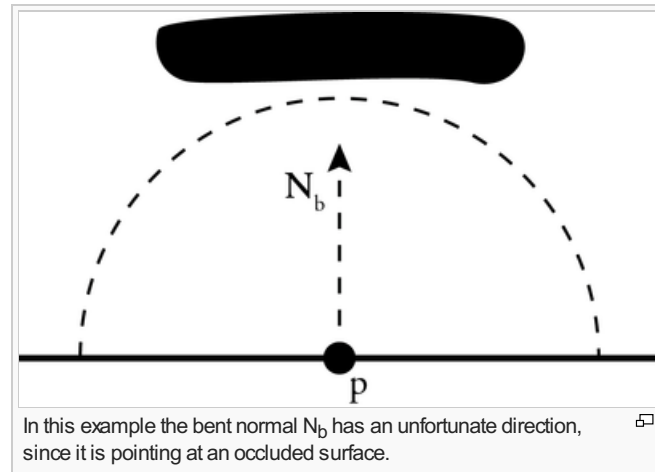

In this example, light may reach the point p only from the left or right sides, but the bent normal points to the average of those two sources, which is, unfortunately, directly toward the obstruction.

Recognition [\[edit\]](#)

In 2010, Hayden Landis, Ken McGaugh and Hilmar Koch were awarded a [Scientific and Technical Academy Award](#) for their work on ambient occlusion rendering.^[3]

See also [\[edit\]](#)

- [Global illumination](#)
- [Photon mapping](#)
- [Radiosity](#)
- [Ray tracing](#)
- [Reflection occlusion](#)
- [Screen space ambient occlusion](#)

References [\[edit\]](#)

- ↑ Miller, Gavin (1994). "Efficient algorithms for local and global accessibility shading". *Proceedings of the 21st annual conference on Computer graphics and interactive techniques*. pp. 319–326.
- ↑ Langer, M.S.; H. H. Buelthoff (2000). "Depth discrimination from shading under diffuse lighting". *Perception* **29** (6): 649–660. doi:10.1068/p3060 ↗. PMID 11040949 ↗.
- ↑ Oscar 2010: Scientific and Technical Awards ↗, *Alt Film Guide*, Jan 7, 2010

External links [\[edit\]](#)

- [Depth Map based Ambient Occlusion](#) ↗
- [NVIDIA's accurate, real-time Ambient Occlusion Volumes](#) ↗
- [Assorted notes about ambient occlusion](#) ↗
- [Ambient Occlusion Fields](#) ↗ — real-time ambient occlusion using cube maps
- [PantaRay ambient occlusion used in the movie Avatar](#) ↗
- [Fast Precomputed Ambient Occlusion for Proximity Shadows](#) ↗ real-time ambient occlusion using volume textures
- [Dynamic Ambient Occlusion and Indirect Lighting](#) ↗ ↗ a real time self ambient occlusion method from Nvidia's GPU Gems 2 book

- [GPU Gems 3 : Chapter 12. High-Quality Ambient Occlusion](#)
- [ShadeVis](#) an open source tool for computing ambient occlusion
- [xNormal](#) A free normal mapper/ambient occlusion baking application
- [3dsMax Ambient Occlusion Map Baking](#) Demo video about preparing ambient occlusion in 3dsMax

Categories: [Shading](#) | [Global illumination algorithms](#)

This page was last modified on 5 August 2015, at 01:44.

Text is available under the [Creative Commons Attribution-ShareAlike License](#); additional terms may apply. By using this site, you agree to the [Terms of Use](#) and [Privacy Policy](#). Wikipedia® is a registered trademark of the [Wikimedia Foundation, Inc.](#), a non-profit organization.

[Privacy policy](#) [About Wikipedia](#) [Disclaimers](#) [Contact Wikipedia](#) [Developers](#) [Mobile view](#)

