



WIKIPEDIA
The Free Encyclopedia

Main page
Contents
Featured content
Current events
Random article
Donate to Wikipedia
Wikipedia store

Interaction

Help
About Wikipedia
Community portal
Recent changes
Contact page

Tools

What links here
Related changes
Upload file
Special pages
Permanent link
Page information
Wikidata item
Cite this page

Print/export

Create a book
Download as PDF
Printable version

Languages

العربية
Беларуская (тарашкевіца)
Български
Bosanski
Català
Čeština
Dansk
Deutsch
Ελληνικά
Español
فارسی
Français
한국어
Hrvatski
Íslenska
Italiano
עברית
Latviešu
Lietuvių
■ ■ ■ ■ ■ ■ ■ ■
Монгол
Nederlands
日本語
Norsk bokmål
Polski
Română
Русский
Slovenčina
Slovenščina

Article Talk

Read Edit View history

Search

Queue (abstract data type)

From Wikipedia, the free encyclopedia
(Redirected from [Queue \(data structure\)](#))




This article includes a [list of references](#), related reading or [external links](#), **but its sources remain unclear because it lacks [inline citations](#)**. Please [improve](#) this article by introducing more precise citations. (*January 2014*)

In [computer science](#), a **queue** (/ˈkjuː/ ***kew[ⓘ]***) is a particular kind of [abstract data type](#) or [collection](#) in which the entities in the collection are kept in order and the principal (or only) operations on the collection are the addition of entities to the rear terminal position, known as *enqueue*, and removal of entities from the front terminal position, known as *dequeue*. This makes the queue a [First-In-First-Out \(FIFO\) data structure](#). In a FIFO data structure, the first element added to the queue will be the first one to be removed. This is equivalent to the requirement that once a new element is added, all elements that were added before have to be removed before the new element can be removed. Often a *peek* or *front* operation is also entered, returning the value of the front element without dequeuing it. A queue is an example of a [linear data structure](#), or more abstractly a sequential collection.

Queues provide services in [computer science](#), [transport](#), and [operations research](#) where various entities such as data, objects, persons, or events are stored and held to be processed later. In these contexts, the queue performs the function of a [buffer](#).

Queues are common in computer programs, where they are implemented as data structures coupled with access routines, as an [abstract data structure](#) or in object-oriented languages as classes. Common implementations are [circular buffers](#) and [linked lists](#).

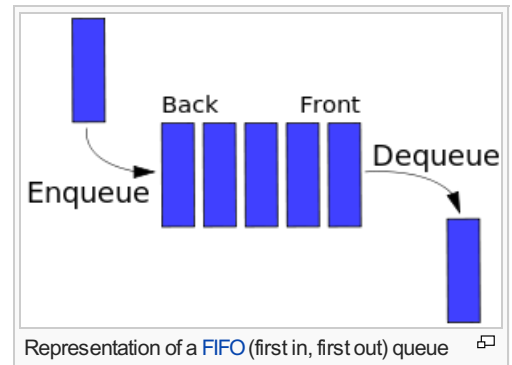

Contents

- Queue implementation
 - Queues and programming languages
 - Examples
- See also
- References
- External links

Queue implementation [[edit](#)]

Theoretically, one characteristic of a queue is that it does not have a specific capacity. Regardless of how many elements are already contained, a new element can always be added. It can also be empty, at which point removing an element will be impossible until a new element has been added again.

Fixed length arrays are limited in capacity, but it is not true that items need to be copied towards the head of the queue. The simple trick of turning the array into a closed circle and letting the head and tail drift around endlessly in that circle makes it unnecessary to ever move items stored in the array. If *n* is the size of the array, then computing indices modulo *n* will turn the array into a circle. This is still the conceptually simplest way to construct a queue in a high level language, but it does admittedly slow things down a little, because the array indices must be compared to zero and the array size, which is comparable to the time taken to check whether an array index is out of bounds, which some languages do, but this will certainly be the method of choice for a quick and dirty implementation, or for any high level language that does not have pointer syntax. The array size must be declared ahead of time, but some implementations simply double the declared array size when overflow occurs. Most modern languages with objects or [pointers](#) can implement or come with libraries for dynamic lists. Such [data structures](#) may have not specified fixed capacity limit besides memory constraints. Queue *overflow*

results from trying to add an element onto a full queue and queue *underflow* happens when trying to remove an element from an empty queue.

A *bounded queue* is a queue limited to a fixed number of items.^[1]

There are several efficient implementations of FIFO queues. An efficient implementation is one that can perform the operations—enqueueing and dequeueing—in *O*(1) time.

- **Linked list**

- A **doubly linked list** has *O*(1) insertion and deletion at both ends, so is a natural choice for queues.
- A regular singly linked list only has efficient insertion and deletion at one end. However, a small modification—keeping a pointer to the *last* node in addition to the first one—will enable it to implement an efficient queue.

- A **deque** implemented using a modified dynamic array

Queues and programming languages [[edit](#)]

Queues may be implemented as a separate data type, or may be considered a special case of a **double-ended queue** (deque) and not implemented separately. For example, **Perl** and **Ruby** allow pushing and popping an array from both ends, so one can use **push** and **shift** functions to enqueue and dequeue a list (or, in reverse, one can use **unshift** and **pop**), although in some cases these operations are not efficient.

C++'s **Standard Template Library** provides a "queue" templated class which is restricted to only push/pop operations. Since J2SE5.0, Java's library contains a [Queue](#) interface that specifies queue operations; implementing classes include [LinkedList](#) and (since J2SE 1.6) [ArrayDeque](#). PHP has an [SplQueue](#) class and third party libraries like **beanstalk'd** and **Gearman**.

Examples [[edit](#)]

A simple queue implemented in **Ruby**:

```
class Queue
  def initialize
    @list = Array.new
  end

  def enqueue(element)
    @list << element
  end

  def dequeue
    @list.shift
  end
end
```

See also [[edit](#)]

- [Circular buffer](#)
- [Deque](#)
- [Priority queue](#)
- [Queueing theory](#)
- [Stack](#) – the "opposite" of a queue: **LIFO** (Last In First Out)



References [[edit](#)]

- ↑ "Queue (Java Platform SE 7)" [Docs.oracle.com](#). 2014-03-26. Retrieved 2014-05-22.
- ↑ Donald Knuth. *The Art of Computer Programming*, Volume 1: *Fundamental Algorithms*, Third Edition. Addison-Wesley, 1997. ISBN 0-201-89683-4. Section 2.2.1: Stacks, Queues, and Deques, pp. 238–243.
- ↑ Thomas H. Cormen, Charles E. Leiserson, Ronald L. Rivest, and Clifford Stein. *Introduction to Algorithms*, Second Edition. MIT Press and McGraw-Hill, 2001. ISBN 0-262-03293-7. Section 10.1: Stacks and queues, pp. 200–204.
- ↑ William Ford, William Topp. *Data Structures with C++ and STL*, Second Edition. Prentice Hall, 2002. ISBN 0-13-085850-1. Chapter 8: Queues and Priority Queues, pp. 386–390.
- ↑ Adam Drozdek. *Data Structures and Algorithms in C++*, Third Edition. Thomson Course Technology, 2005. ISBN 0-534-49182-0. Chapter 4: Stacks and Queues, pp. 137–169.

External links [\[edit \]](#)

- [Queue Data Structure and Algorithm](#)
- [Queues with algo and 'c' programme](#)
- [STL Quick Reference](#)
- [VBScript implementation of stack, queue, deque, and Red-Black Tree](#)



Wikimedia Commons has media related to *[Queue data structure](#)*.

v · t · e	Data structures
Types	Collection · Container
Abstract	Associative array · Double-ended priority queue · Double-ended queue · List · Map · Multimap · Priority queue · Queue · Set (multiset) · Disjoint Sets · Stack
Arrays	Bit array · Circular buffer · Dynamic array · Hash table · Hashed array tree · Sparse array
Linked	Association list · Linked list · Skip list · Unrolled linked list · XOR linked list
Trees	B-tree · Binary search tree (AA · AVL · red-black · self-balancing · splay) · Heap (binary · binomial · Fibonacci) · R-tree (R* · R+ · Hilbert) · Trie (Hash tree)
Graphs	Binary decision diagram · Directed acyclic graph · Directed acyclic word graph
List of data structures	

Black, Paul E. "Bounded queue" [↗](#). *Dictionary of Algorithms and Data Structures*. NIST.

Categories: [Abstract data types](#)