


ABG Interpretation Workshop — Design Handoff

13-case blood-gas teaching tool · single-file HTML app + 4 PDFs · live at stellar-griffin-9c37be.netlify.app


1 · THREE VIEWS, ONE FILE

Participant

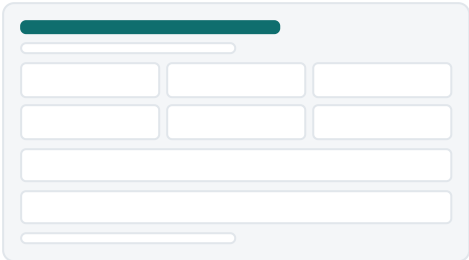


Route: /
Name + group → 13 cases. Fill interpretation, SID, case Qs. Autosave. Locked until moderator reads code.

Faculty

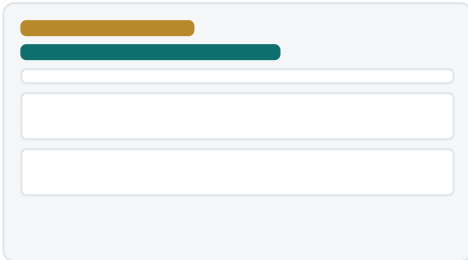


Route: /?faculty=1
Gold banner + two tabs (Cases & Answers · Cheat Sheet). No codes. Each case expands to full walkthrough.

Moderator

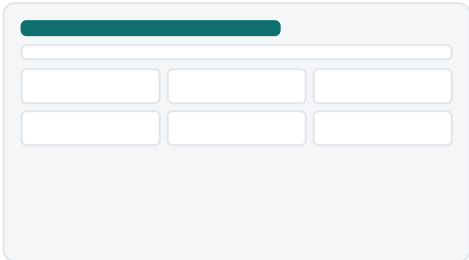

Route: /?mod=1
Three tabs. Codes & QR tab shows big 4-char code + join QR. Plus Cases & Answers and Cheat Sheet.

2 · LIVE SESSION FLOW

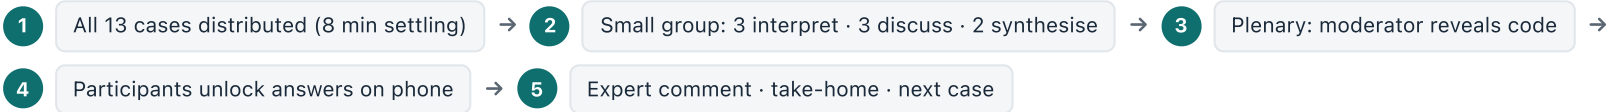

13 cases × 15 min ≈ 3.25 hrs · or select 8 for 2 hrs.

3 · DESIGN TOKENS



#0F6E6E	#0A4E4E	#E6F1F1	#1B2A3A	#B8892B	#FBF7EC	#F4F6F8	#E1E6EB	#5A6672
TOKEN		VALUE				NOTES		
Body font		15px, line-height 1.55				-apple-system stack		
Textarea font		16px mobile, 14px desktop				16px prevents iOS zoom		
Radii		6–12px				7px inputs, 10–12px cards		
Shadow		0 1px 3px rgba(15,30,40,.06)				Subtle, one level		
Spacing unit		4px				Used 4/6/8/12/16/20/24/32		
4 · COMPONENT INVENTORY								
COMPONENT		WHERE USED				STATES		
Gas card		Label over value in bordered grid				Default only		
Interpretation row		Step label + textarea				Empty, filled, focused		
SID table		3-column: tool, value, interpretation				Editable, revealed		
Case-specific Q & A		Question + answer block				Input, model answer		
Unlock bar		4-char code input + button				Locked, wrong code, unlocked		
Answer panel		Model answers after unlock				Revealed		
Post-intervention card		Gold-tinted, repeat gas + steps				Revealed		
Sidebar case item		Number + title + status				Not started, in progress, unlocked, active		
Moderator tab bar		3 tabs (or 2 for faculty)				Active, inactive		
QR block		Image + URL + buttons				Default		
Collapsible case		Used in faculty walkthrough				Closed, open		
Cheat sheet table		Formulas, patterns, pitfalls				Static		

5 · DATA SHAPE — ONE CASE

```
{ id: 1, title: "DKA",
  vignette: "...",
  gas_in:   { pH, PaCO2, HCO3, PaO2, Na, K, Cl, Albumin, Glucose, b-OHB },
  steps_in: [{"1. Clinical history","..."], ...8 rows},
  sid_in:   [{"SID","132 - 98 = 34","Low-normal..."], ...4 rows},
  intervention: "...",
  gas_post: { ...same keys as gas_in... },
  steps_post:[...],
  qs: ["Calculate corrected sodium.", ...],
  ans:["..."], qs_post:[...], ans_post:[...],
  pitfalls:["..."], synthesis:"...", take:"..." }
```

6 · WHAT WORKS TODAY

✓ Working

- All 13 cases in all 3 views
- Deterministic 4-char unlock codes (FNV-1a)
- LocalStorage autosave, per group
- Mobile-first single-column layout, bottom-sheet nav
- Faculty view hides codes tab
- QR auto-generation from moderator URL
- 4 PDFs generated from same data

Gaps · improvement ideas

- No cross-device sync (each phone isolated)
- No live analytics for moderator
- QR relies on external service (offline breaks)
- No per-case timer visible
- No “reset my answers” in participant view
- No exit-ticket summary screen
- Case data embedded — hard for non-devs to edit
- ARIA / keyboard nav on mobile nav is minimal

7 · QUESTIONS FOR THE DESIGNER

Product: should participants see a peer-comparison view (how did my group answer vs others) after unlock?

Visual: how to unify the print PDFs with the web app so they feel like one product?

Flow: should the moderator be able to broadcast the case switch to all participants?

Content: what's the clearest way to show a “persistently low HCO_3^- = the acid has changed character” teaching moment?

Motion: does the unlock reveal want a specific animation (rather than instant)?

Accessibility: WCAG AA pass — focus rings, contrast on gold-soft, screen reader labels.

