

Emergence of Compositional Language with Deep Generational Transmission

Michael Cogswell¹, Jiasen Lu¹, Stefan Lee², Devi Parikh^{1,3}, Dhruv Batra^{1,3}

¹Georgia Tech ²Oregon State University ³Facebook AI Research

{cogswell, jiasenlu, parikh, dbatra}@gatech.edu, leestef@oregonstate.edu

Abstract

Recent work has studied the emergence of language among deep reinforcement learning agents that must collaborate to solve a task. Of particular interest are the factors that cause language to be compositional—*i.e.* express meaning by combining words which themselves have meaning. Evolutionary linguists have found that in addition to structural priors like those already studied in deep learning, the dynamics of transmitting language from generation to generation contribute significantly to the emergence of compositionality. In this paper, we introduce these cultural evolutionary dynamics into language emergence by periodically replacing agents in a population to create a knowledge gap, implicitly inducing cultural transmission of language. We show that this implicit cultural transmission encourages the resulting languages to exhibit better compositional generalization.

1 Introduction

Compositionality is an important structure of language that reflects a disentangled understanding of the world – enabling the expression of infinitely many concepts using finitely many elements. Agents that have compositional understandings of the world generalize in obviously correct ways even in the face of limited training examples [Lake and Baroni, 2018]. For example, an agent with a compositional understanding of blue squares and purple triangles should also understand purple squares without directly observing any of them. Developing artificial agents that can ground, understand, and produce compositional (and therefore more interpretable) language could greatly improve generalization to new instances and ease human-AI interactions.

In building theories of how compositionality emerges in human languages, work in evolutionary linguistics looks to the process of cultural transmission [Kirby, 2001; Kirby *et al.*, 2008]. Cultural transmission of language occurs when a group of agents pass their language on to a new group of agents, *e.g.* parents who teach their children to speak as they do. Because this education is incomplete and biased, it allows the language itself to change over time via a process known as *cultural evolution*. This paradigm [Kirby *et al.*, 2014] explains the emergence of compositionality as a result

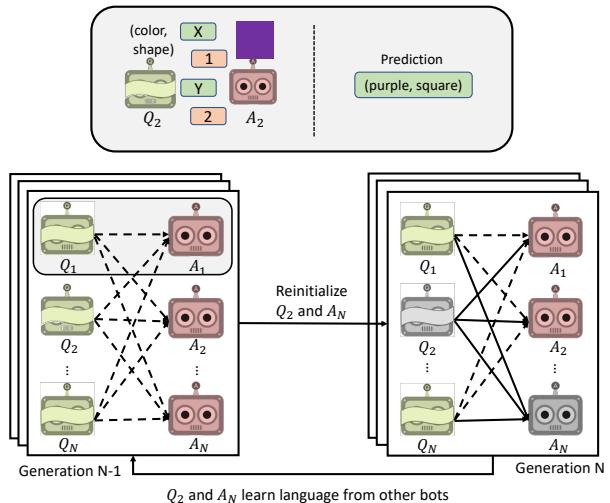


Figure 1: We introduce cultural transmission into language emergence between neural agents. Start with the goal-oriented dialog task at the top of the figure (similar to that of [Kottur *et al.*, 2017]). During learning we periodically replace some agents with new ones (gray agents). These new agents do not know any language, but instead of creating one they learn it from older agents. This creates generations of language that become more compositional over time.

of expressivity and compressibility – *i.e.* to be most effective, a language should be expressive enough to differentiate between all possible meanings (*e.g.*, objects) and compressible enough to be learned easily. Work in the evolutionary linguistics community has shown that over multiple ‘generations’ these competing pressures result in the emergence of compositional languages both in simulation [Kirby, 2001] and with human subjects [Kirby *et al.*, 2008]. These studies aim to understand humans whereas we want to understand and design artificial neural networks.

Approaching the problem from another direction, recent work in AI has studied language emergence in such multi-agent, goal-driven tasks. These works have demonstrated that agent languages will emerge to enable coordination-centric tasks to be solved without direct or even indirect language supervision [Foerster *et al.*, 2016; Sukhbaatar *et al.*, 2016; Lazaridou *et al.*, 2017; Das *et al.*, 2017]. However, the resulting languages are usually not compositional and are difficult to interpret, even by other machines [Andreas *et al.*, 2017]. Some existing work has studied means to encourage com-

positional language formation [Mordatch and Abbeel, 2018; Kottur *et al.*, 2017], but these settings study fixed populations of agents – *i.e.* examining language within a single generation.

In this work we bridge these two areas – examining the effect of generational cultural transmission on the compositionality of emergent languages in a multi-agent, goal-driven setting.

We study this in the context of a cooperative dialog-based reference game involving two agents communicating in discrete symbols [Kottur *et al.*, 2017]; an example dialog is shown at the top of Fig. 1. To examine cultural transmission, we extend this setting to a population of agents (bottom of Fig. 1) and introduce a simple mechanism to induce the expressivity and compressibility pressures inherent in cultural transmission. Specifically, we periodically re-initialize some subset of the agents in the population. In order to perform well at the task, the population’s emergent language must be sufficiently expressive to reference all the objects (expressivity) and must be easily learnable by these ‘new’ agents (compressibility). The new agents have a randomized language whereas the surviving agents already know a grounded language. This “knowledge gap” creates an implicit ‘teaching’ setting that is analogous to the explicit transmission stage in models of *iterative learning* [Kirby, 2001].

Through our experiments and analysis, we show that periodic agent replacement is an effective way to induce cultural transmission and yields more compositionally generalizable language in our setting. To summarize, our contributions are:

- We propose a method for inducing implicit cultural transmission in neural language models.
- We measure the similarity between agent languages and verify cultural transmission has occurred as a result of our periodic agent replacement protocol.
- We show our cultural transmission procedure induces compositionality in neural language models, going from 13% accuracy on a compositionally novel test set to 46% in the best configuration. Further, we show this is complementary with previous priors which encourage compositionality.

2 Task & Talk: A Testbed for Compositional Language Emergence

We consider the cooperative *Task & Talk* reference game introduced in [Kottur *et al.*, 2017]. Shown in the top of Fig. 1, the game is played by two agents – one who observes an attributed object – *e.g.* (purple, solid, square) – and another who is given a task to retrieve a subset of these attributes over the course of the dialog – *e.g.* (color, shape). The dialog itself consists of two rounds of agents exchanging single-token utterances from fixed vocabularies. At the end of the dialog, the task-aware agent must report the requested attributes and both agents are rewarded for correct predictions. This causes a language grounded in the objects to *emerge* because there is no other way to solve the task.

A compositional solution to this task can look like a question-answer style dialog where the task-aware agent queries the other for specific attributes (top of Fig. 1) – *e.g.* uttering “X” requesting the color to which the other agent

replies “1” indicating purple. Importantly, this pattern would persist regardless of the other attribute values of the object (*e.g.* for all (purple, *, *) objects). However, as there is no grounding supervision provided, agents must learn to associate specific meanings to specific words and it is unlikely for compositional languages to emerge purely by chance. Given the same color task, a non-compositional agent might use “1” for (purple, solid, square) and then “2” for a novel instance (purple, solid, circle). Other agents have no way to know that “2” means purple instead of “1”, so compositional language is essential for generalization to compositionally novel instances.

Models. To formalize this setting, let Q-bot and A-bot be agent policies parameterized by neural networks Q and A respectively. At each round t , Q-bot observes the task x_Q and its memory of the dialog so far h_Q^{t-1} and produces a single-token utterance $m_Q^t \in \mathcal{V}$ from the vocabulary \mathcal{V} . Functionally, $m_Q^t, h_Q^t = Q(m_A^{t-1}, x_Q, h_Q^{t-1})$ where m_A^{t-1} is A-bot’s reply in the previous round. Likewise, A-bot responds by computing $m_A^t, h_A^t = A(m_Q^t, x_A, h_A^{t-1})$ where x_A is the object instance represented symbolically by concatenating 3 one-hot vectors, one per attribute. After two rounds, Q-bot must respond to the task, predicting the requested attribute pair $\hat{u} = U(x_Q, h_Q^T)$ as a function of the task and Q-bot’s final memory state. Both agents are rewarded if both attributes are correct (no partial credit). We follow the neural network architectures of Q , A , and U from [Kottur *et al.*, 2017].

Measuring Compositional Generalization. [Kottur *et al.*, 2017] generated a synthetic dataset consisting of three attribute types (color, shape, style) each with four values (*e.g.*, red, blue, square, star, dotted, solid, ...) and six tasks, one task for each ordered pair of different attribute types. This results in 64 unique instances and 384 task-instance pairs. To evaluate compositionality, [Kottur *et al.*, 2017] held out 12 random instances for testing. Given the closed-world set of instances, these 12 triplets of attributes is not seen during training; however, each individual value is seen in other triplets that do appear in training. As such, test accuracy is a measure of compositional generalization.

Shortcomings of [Kottur *et al.*, 2017] Evaluation. In our investigations, we found some shortcomings in the evaluation protocol of [Kottur *et al.*, 2017]. First, the authors do not report variance over multiple runs or different random test-sets which we found to be significant. Second, the strategy of randomly selecting the test set can still reward some only partially compositional strategies. For instance, suppose agents develop a language that uses single words to refer to attribute pairs like (red, *, triangle) and (red, filled, *). Such agents might generalize to an unseen instance (red, filled, triangle) by composing the ‘paired’ words above instead of disentangling individual attributes.

We make two modifications to address these issues. Our results are reported as means and variances estimated from multiple training runs with 4 different random seeds and 4-way cross-validation (16 experiments). We also introduce a harder dataset where instead of withholding random individual instances (*e.g.*,

(green, dotted, triangle),...) as in [Kottur *et al.*, 2017], we withhold all instances for a set of attribute pairs (e.g., (green, dotted, *), (red, solid, *),...). We will refer to datasets generated in this fashion as **novel pair** and the original dataset as **novel instance**. We report on both settings for comparison (see appendix A.1), but find our new setting to be significantly more challenging in practice – requiring a stricter notion of compositionality more closely aligned with human intuitions about these attributes.

3 Compositional Language Emergence with Cultural Transmission

In iterative learning models of cultural transmission from evolutionary linguistics, competing pressures towards expressivity and compressibility have been shown to induce compositionality over multiple ‘generations’ of language transfer [Kirby, 2001; Kirby *et al.*, 2008]. The goal-driven nature of our reference game already encourages expressivity – agents must be able to refer to the objects in order to succeed. To introduce compressibility pressure and parallel literature in evolutionary linguistics, we introduce a population of agents which regularly has members replaced by new agents that lack any understanding of the remaining population’s language. As this paradigm lacks explicit teaching steps where new agents are trained to ground existing words, we consider this approach as a means of implicit cultural transmission.

Algorithm 1: Training with **Replacement** and **Multiple Agents**

```

1 for epoch  $e = 1, \dots, N_{\text{epochs}}$  do
2   Sample Q-bot  $i_Q$  from  $\mathcal{U}\{1, N_Q\}$  and A-bot  $i_A$  from
       $\mathcal{U}\{1, N_A\}$ 
3   for  $x_Q, x_A, u$  in each batch do
4     for dialog rounds  $t = 1, \dots, T$  do
5        $m_Q^t, h_Q^t = Q^{i_Q}(m_A^{t-1}, x_Q, h_Q^{t-1})$ 
6        $m_A^t, h_A^t = A^{i_A}(m_Q^{t-1}, x_A, h_A^{t-1})$ 
7        $\hat{u} = U^{i_Q}(x_Q, h_Q^T)$ 
8       Policy gradient update w.r.t. both Q-bot and
          A-bot parameters
9     if  $e \bmod E = 0$  then
10      Sample replacement set  $B$  under policy  $\pi$  and
          re-initialize all agents in  $B$ 
11 return all Q-bots and A-bots.

```

Populations of Agents. We consider a population of Q-bots $\{Q^1, \dots, Q^{N_Q}\}$ and a population of A-bots $\{A^1, \dots, A^{N_A}\}$ with each agent having a different set of parameters. At each iteration during learning, we sample a random Q-bot-A-bot pair to interact and receive updates – *i.e.* the red line (2) in Alg. 1. As any Q-bot may be made to communicate with any A-bot, there is pressure for the population to adopt a unified language. Likewise, when an agent is reinitialized it will receive positive reward much more quickly when it happens to use language that its conversational partners understand. Furthermore, ‘compressible’ languages that are easier to learn will result in greater reward for the population in the face of periodic re-initialization of agents.

Introducing multiple agents may in itself add compressibility pressure and improve generalizations even without replacement [Raviv *et al.*, 2018]. Agents in a population have to model minor linguistic differences between conversational partners given the same memory capacity. Further, each agent provides another potential language variation that can be mimicked and perpetuated–increasing language diversity early in training. We examine these effects through no-replacement baselines, but find that generational pressure where some agents know less than others can also be important for compositionality in our setting.

Replacement. In order to create a notion of ‘generations’ we replace agents periodically. Let π be a replacement strategy, returning a subset of the population. Every E epochs, we call π and reinitialize the parameters and optimizers for the returned agents (blue lines 9-10 in Alg. 1). We investigate three settings of π (see appendix A.2 for more details):

- **Uniform Random.** Sample an A-bot and Q-bot from uniform random distributions.
- **Epsilon Greedy.** With probability $1 - \varepsilon$ replace the A-bot and Q-bot with the lowest validation accuracy. We use $\varepsilon = 0.2$ in our experiments.
- **Oldest.** Replace the oldest A-bot and Q-bot, breaking ties with uniform random sampling.

4 Experimental Setting

Experimental Setting. We evaluate on both our novel pair dataset and the novel instance dataset from [Kottur *et al.*, 2017] (see appendix A.1), as described in Section 2. All results are reported as means and variances computed from a total of 16 trials (four random seeds each with 4-way cross-validation). We report accuracy based on Q-bot getting both elements of the task correct – corresponding to the more restrictive “Both” setting from [Kottur *et al.*, 2017].

[Kottur *et al.*, 2017] examined a series of increasingly restrictive settings in order to study conditions under which compositionality emerges. The primary variables are whether A-bot has memory (ablated by setting $h_A^t = 0$) and the vocabulary sizes V_Q and V_A for Q-bot and A-bot respectively. For comparison we also evaluate in these settings: **Minimal Vocab** ($V_Q=3, V_A=4$). **Memoryless + Minimal Vocab** ($V_Q=3, V_A=4, h_A^t=0$), **Overcomplete** ($V_Q=V_A=64$). We also introduce **Memoryless + Overcomplete** ($V_Q=V_A=64, h_A^t=0$) to complete the cross product of settings and examine the role of memory restriction in overcomplete vocabularies.

The Memoryless + Minimal Vocabulary setting results in the best compositional generalization; however, this is an extreme setting – requiring not only that the minimum number of groundable symbols be known but also that A-bot not be able to remember its previous utterance. While we do report these settings and see quite large performance gains due to cultural transmission, we are mainly interested in the more realistic Overcomplete setting where a large pool of possible tokens is provided and both dialog agents have memory.

Model and Training Details. Our A-bots and Q-bots have the same architecture as in [Kottur *et al.*, 2017]. All agents are trained with $E = 25000$, a batch size of 1000,¹ and

¹ All 384 instances (64 objects \times 6 tasks) fit in 1 batch.

the Adam [Kingma and Ba, 2015] optimizer (one per bot) with learning rate 0.01. In the Multi Agent setting we use $N_A = N_Q = 5$. We stop training after 8 generations (199000 epochs Multi Agent; 39000 epochs Single Agent). This differs from [Kottur *et al.*, 2017], which stopped once train accuracy reached 100%. Further, we do not mine negatives.

Baselines. These help isolate the effects of our approach.

- **Single Agent Populations.** We ablate the effect of multi-agent populations by training individual A-bot-Q-bot pairs (*i.e.* populations with $N_A = N_Q = 1$). We apply the *uniform random* (either A-bot or Q-bot at random) and *oldest* (alternating between A-bot and Q-bot) replacement strategies to these agents; however, the *epsilon greedy* strategy is not well-defined here. In this setting we decrease E from 25000 to 5000 to keep the average number of gradient updates for each agent constant with respect to the multi-agent experiments.
- **No Replacement.** We also consider the effect of replacing no agents at all, but still allowing the agents to train for the full 199,000 (39,000) epochs. Improvement over this baseline shows the gains from our replacement strategy under identical computational budgets.

The code used to implement all experiments is available at <https://github.com/mcogswell/evolang>.

5 Results and Analysis

5.1 Impact of Cultural Transmission on Compositional Generalization

Results with standard deviations against our harder dataset are reported in Fig. 2. We compared methods and models using dependent paired t-tests and reported the resulting p-values in Section A.4 of the appendix. Result on the original Task & Talk dataset are in Section A.1 of the appendix.

Cultural transmission induces compositionality. Our main result is that cultural transmission approaches outperform baselines without cultural transmission. This can be seen by noting that for each model type in Fig. 2, the 3 darker blue bars (Multi Agent Replacement approaches) are largest. After running a dependent paired t-test against all pairs of baselines and cultural transmission approaches we find a meaningful difference in all cases ($p \leq 0.05$). This is strong support for our claim that our version of cultural transmission encourages compositional language because it causes better generalization to novel compositions of attributes.

Next we go on to discuss some additional trends we hope the community will find useful.

Population dynamics without replacement usually lead to some compositionality. The *Multi Agent No Replacement* policies usually outperform than the *Single Agent No Replacement* policies, though the difference isn't very significant in the except in the *Overcomplete* and *Minimal Vocab* settings. This agrees with recent work from evolutionary linguistics, where multiple agents can lead to compositionality without generational transmission [Raviv *et al.*, 2018].

Variations in replacement strategy tend to not affect performance. The *Multi Agent Uniform Random/Epsilon Greedy/Oldest* replacement strategies are not largely or consistently different from one another across model variations.

This suggests that while some agent replacement needs to occur, it is not critical whether agents with worse language are replaced or whether there is a pool of similarly typed agents to remember knowledge lost from older generations. The main factor is that new agents learn in the presence of others who already know a language.

Cultural transmission is complementary with other factors that encourage compositionality. As in [Kottur *et al.*, 2017], we find the *Memoryless + Small Vocab* model is clearly the best. This agrees with factors noted elsewhere [Kottur *et al.*, 2017; Mordatch and Abbeel, 2018; Nowak *et al.*, 2000] and shows how many different factors can affect the emergence of compositionality.

Removing memory makes only minor differences. Removing memory makes no difference (negative or positive) in Single Agent settings, but it can have a relatively small effect in Multi Agent settings, helping *Small Vocab* models and hurting *Overcomplete* models. While our approach is complementary with minimizing vocab size to increase compositionality, its makes memory removal less useful. As the *Memoryless + Overcomplete* setting has not been reported before, these results suggest that the relationship between inter-round memory and compositionality is not clear.

Overall, these results show that adding cultural transmission to neural dialog agents improves the compositional generalization of the languages learned by those agents in a way complementary to other priors. It thereby shows how to transfer the cultural transmission principle from evolutionary linguistics to deep learning.

5.2 Is Generational Transmission Occurring?

Because it is implicit, cultural transmission may not actually be occurring; improvements may be from other sources. How can we measure cultural transmission? We focus on A-bots and take a simple approach. We assume that if two A-bots ‘speak the same language’ then that language was culturally transmitted. There is a combinatorial explosion of possible languages that could refer to all the objects of interest, so if the words that refer to the same object for two agents are the same then they were very likely transmitted from the other agents, rather than similar languages emerging from scratch just by chance. This leads to a simple approach: consider pairs of bots and see if they say similar things in the same context. If they do, then their language was likely transmitted.

More formally, consider the distribution of tokens A-bot A^i might use to describe its object x_A when talking to Q-bot Q^k : $p_{k,i}(m_A^t | x_A)$ or $p_{k,i}$ for short. We want to know how similar A^i 's language is to that of another A-bot A^j . We'll start by comparing those two distributions by computing the KL divergence between them and then taking an average over context (objects, Q-bots, and dialog rounds) to get our pairwise agent language similarity metric D_{ij} :

$$D_{ij} = \hat{E}_{x_A, k, t} [D_{KL}(p_{k,i}(m_A^t | x_A), p_{k,j}(m_A^t | x_A))] \quad (1)$$

Taking another average, this time over all pairs of bots (and also random seeds and cross-val folds), gives our final measure of language similarity reported in Fig. 3.

$$D = \hat{E}_{i,j \text{ s.t. } i \neq j} [D_{ij}] \quad (2)$$

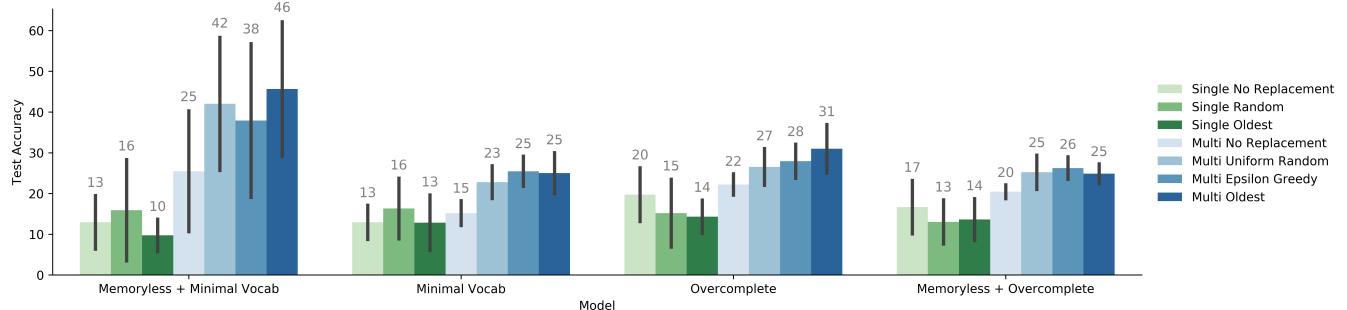


Figure 2: Test set accuracies (with standard deviations) are reported against our new harder dataset using models similar to those in [Kottur *et al.*, 2017]. Our variations on cultural transmission (darker blue bars) outperform the baselines without cultural transmission.

D is smaller the more similar language is between bots. Note that even though D_{ij} is not symmetric (because KL divergence is not), D is symmetric because it averages over both directions of pairs.

We compute D by sampling an empirical distribution over all messages and observations, taking 10 sample dialogues in each possible test state (x_A, x_Q) of the world using the final populations of agents as in Fig. 2. Note that this metric applies to a group of agents, so we measure it for only the *Multi Agent* settings, including two new baselines colored red in Fig. 3. The *Single Agents Combined* baseline trains 4 *Single Agent* *No Replacement* models independently then puts them together and computes D for that group. These agents only speak similar languages by chance, so D is high. The *Random Initialization* baseline evaluates language similarity using newly initialized models. These agents have about a uniform distribution over words at every utterance, so their languages are both very similar and useless. For each model these baselines act like practical (not strict) upper and lower bounds on D , respectively.

Fig. 3 shows this language dissimilarity metric for all our settings. As we expect, the paired *Single Agents* are highly dissimilar compared to agents from *Multi Agent* populations. Further, all the replacement strategies result in increased language similarity—although the degree of this effect seems dependent on vocabulary setting. This provides some evidence that cultural transmission is occurring in *Multi Agent* settings and is encouraged by the replacement strategy in our approach. While all *Multi Agent* settings resulted in language transmission, our replacement strategies results in more compositional languages due to repeated teaching of new generations of agents.

5.3 Visualizing Emergent Languages

In this section we visualize the language learned by a pair of bots to show its compositionality. In the appendix we compare these bots to others at different stages of learning and from earlier generations to help understand how the language developed over generations.

Figure 4 shows all 64 conversations between Q-bot 4 and A-bot 3 for the *(shape, color)* task. These bots are from the 8th generation of the *Multi Agent Oldest* setting.

To interpret the visualization, start by looking at only the dashed blue circle in the top left. To the right of it are the two tokens “0” and “3”, which are the words A-bot used to describe the object in the two dialog rounds. The green check one more step to the right indicates that Q-bot was able to guess the *circle blue* from these tokens. Now look at

all 4 blue circles in the top left grid cells. Only shape and color matter for this task, so A-bot uttered “0 3” for every blue circle, appropriately ignoring style (*i.e.*, dashed, dotted, filled, or solid).

By looking at the entire visualization with its 4x4 grid delineated by black separators we can see that the language is indeed compositional. Rows of the 4x4 grid group objects by shape and columns group objects by color. This makes it convenient to qualitatively evaluate language compositionality with respect to the *(shape, color)* task. If A-bot’s language is compositional then it should use one token to indicate row / shape and one token for column / color.

Looking at the first row, A-bot’s first utterance is always “0”, but is not “0” anywhere else, so when “0” is uttered first it means *circle*. Similarly, A-bot’s second utterance is always “3” in the first column, so “3” means *blue*. Continuing with this analysis we find each character has meaning: (0=*circle*, 2=*square*, 1=*star*, 3=*triangle*), and (3=*blue*, 2=*green*, 1=*purple*, 0=*red*). Individual symbols have meaning, so the language is compositional.

6 Related work

Language Evolution Causes Structure. Researchers have spent decades studying how unique properties of human language like compositionality could have emerged. There is general agreement that people acquire language using a combination of innate cognitive capacity and learning from other language speakers (cultural transmission), with the degree of each being widely disputed [Perfors, 2002; Pinker and Bloom, 1990]. Both innate cognitive capacity and specific modern human languages like English co-evolved [Briscoe, 2000] via biological [Pinker and Bloom, 1990] and cultural [Tomasello, 1999; Smith, 2006] evolution, respectively.

In particular, explanations of how the cultural evolution of languages could cause structure like compositionality are in abundance [Nowak and Krakauer, 1999; Nowak *et al.*, 2000; Smith *et al.*, 2003; Brighton, 2002; Vogt, 2005; Kirby *et al.*, 2014; Spike *et al.*, 2017]. An important piece of the explanation of linguistic structure is the iterated learning model [Kirby *et al.*, 2014; Kirby, 2001; Kirby *et al.*, 2008] used to motivate our approach. Indeed it shows that cultural transmission causes structure in computational [Kirby, 2001; Kirby, 2002; Christiansen and Kirby, 2003; Smith *et al.*, 2003] and human [Kirby *et al.*, 2008; Cornish *et al.*, 2009; Scott-Phillips and Kirby, 2010] experiments. Even though cultural transmission may aid the emergence of compositionality, recent results in evolutionary linguistics [Raviv *et al.*,

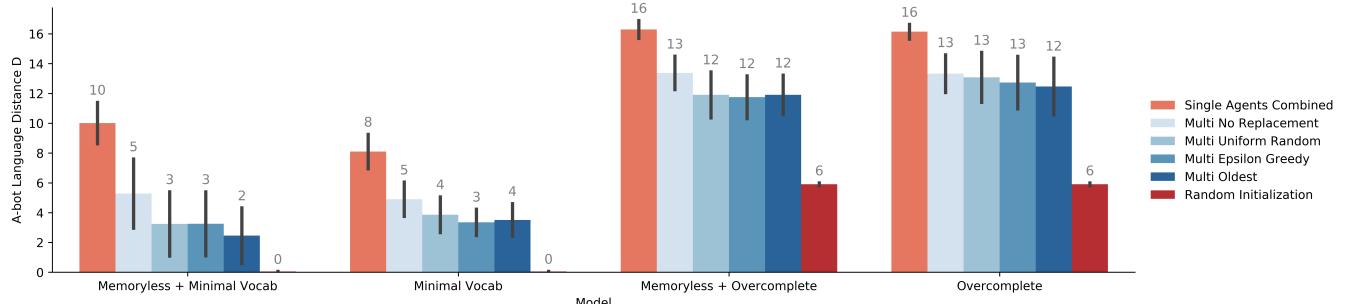


Figure 3: Do bots in a population learn similar languages? On the y-axis (eq. (2)) lower values indicate more similar language. Bots from our method speak similar languages, but independently evolved agents do not. Thus our implicit procedure induces cultural transmission.

Model		A-bot Language Distance D		
Object	Q-bot 4	Q-bot 3	Q-bot 4	Q-bot 3
Circle	0 3 ✓	0 2 ✗	0 1 ✗	0 0 ✓
Circle	0 3 ✓	0 2 ✗	0 1 ✗	0 0 ✓
Circle	0 3 ✓	0 2 ✗	0 1 ✗	0 0 ✓
Circle	0 3 ✓	0 2 ✗	0 1 ✗	0 0 ✓
Square	2 3 ✓	2 2 ✓	2 1 ✓	2 0 ✓
Square	2 0 ✗	2 2 ✓	2 1 ✓	2 0 ✓
Square	2 3 ✓	2 2 ✓	2 1 ✓	2 0 ✓
Square	2 3 ✓	2 2 ✓	2 1 ✓	2 0 ✓
Star	1 3 ✓	1 2 ✓	1 1 ✓	1 0 ✓
Star	1 3 ✓	1 2 ✓	1 1 ✓	1 0 ✓
Star	1 3 ✓	1 2 ✓	1 1 ✓	1 0 ✓
Star	1 3 ✓	1 2 ✓	1 1 ✓	1 0 ✓
Triangle	3 3 ✓	3 2 ✓	3 1 ✓	3 0 ✗
Triangle	3 3 ✓	3 2 ✓	3 1 ✓	3 0 ✗
Triangle	3 3 ✓	3 2 ✓	3 1 ✓	3 0 ✗
Triangle	3 3 ✓	3 2 ✓	3 1 ✓	3 0 ✗
Task: (shape, color)	Train	Val	Test	

Figure 4: All conversations between Q-bot 4 and Q-bot 3 for the (shape, color) task. These bots were trained in the *Multi Agent Oldest* setting. The figure shows A-bot’s utterances for each object and whether or not Q-bot guessed the object correctly, as described in Section 5.3. This language is compositional because each token refers to a color or shape.

2018] and deep learning [Kottur *et al.*, 2017; Mordatch and Abbeel, 2018] also emphasize other factors.

While existing work in deep learning has focused on biases that encourage compositionality, it has not considered settings where language is permitted to evolve over generations of agents. We have shown such an approach is viable and even complementary with other approaches.

Language Emergence in Deep Learning. Recent work in deep learning has increasingly focused on multi-agent environments where deep agents learn to accomplish goals (possibly cooperative or competitive) by interacting appropriately with the environment and each other. Some of this work has shown that deep agents will develop their own language where none exists initially if driven by a task which requires communication [Foerster *et al.*, 2016; Sukhbaatar *et al.*, 2016; Lazaridou *et al.*, 2017]. Most relevant is work which focuses on conditions under which *compositional* language emerges as deep agents learn to cooperate [Mordatch and Abbeel, 2018; Kottur *et al.*, 2017]. Both [Mordatch and Abbeel, 2018] and [Kottur *et al.*, 2017] find that limiting the vocabulary size so that there aren’t too

many more words than there are objects to refer to encourages compositionality, which follows earlier results in evolutionary linguistics [Nowak *et al.*, 2000]. Follow up work has continued to investigate the emergence of compositional language among neural agents, mainly focusing on perceptual as opposed to symbolic input and how the structure of the input relates to the tendency for compositional language to emerge [Choi *et al.*, 2018; Havrylov and Titov, 2017; Lazaridou *et al.*, 2018]. Other work has shown that Multi Agent interaction leads to better emergent translation [Lee *et al.*, 2018], but it does not measure compositionality.

Cultural Evolution and Neural Nets. Somewhat recently, [Bengio, 2012] suggested that culturally transmitted ideas may help in escaping from local minima. Experiments in [Gülçehre and Bengio, 2016] support this idea by showing that supervision of intermediate representations allows a more complex toy task to be learned. Unlike our work, these experiments use direct supervision provided by the designed environment rather than indirect and implicit supervision provided by other agents.

Two concurrent works examine the role of periodic agent replacement on language emergence – albeit in different environments. In [Li and Bowling, 2019] replacement is used to encourage languages to be easy to teach, and this in turn causes compositionality. In [Dagan *et al.*, 2019] neural language is transmitted through a bottleneck caused by replacement. The resulting language has increased efficiency and effectiveness, with further results showing that co-evolving the agents themselves with the language amplifies the effect. Both of these works support our central observations.

7 Conclusion

In this work we investigated cultural transmission in deep neural dialog agents, applying it to language emergence. The evolutionary linguistics community has long used cultural transmission to explain how compositional languages could have emerged. The deep learning community, having recently become interested in language emergence, has not investigated that link until now. Instead of explicit models of cultural transmission familiar in evolutionary linguistics, we favor an implicit model where language is transmitted from generation to generation only because it helps agents achieve their goals. We show that this does indeed cause cultural transmission and compositionality.

Future work. While our work used an implicit version of cultural transmission, we are interested in the effect of explicit versions of cultural transmission on language structure.

Cultural transmission may also provide an appropriate prior for neural representations of non-language information.

Acknowledgements

We would like to thank Satwik Kottur for code and comments as well as Karan Desai for additional code. We would also like to thank Douwe Kiela, Diane Bouchacourt, Sainbayar Sukhbaatar, Marco Baroni, and Erik Wijmans for comments on earlier versions of this paper.

The Georgia Tech effort was supported in part by NSF, AFRL, DARPA, ONR YIPs, ARO PECASE, and Amazon. The views and conclusions contained herein are those of the authors and should not be interpreted as necessarily representing the official policies or endorsements, either expressed or implied, of the U.S. Government, or any sponsor.

References

- [Andreas *et al.*, 2017] Jacob Andreas, Anca D. Dragan, and Dan Klein. Translating neuralese. In *ACL*, 2017.
- [Bengio, 2012] Yoshua Bengio. Evolving culture vs local minima. *CoRR*, abs/1203.2990, 2012.
- [Brighton, 2002] Henry Brighton. Compositional syntax from cultural transmission. *Artificial Life*, 8:25–54, 2002.
- [Briscoe, 2000] Ted Briscoe. Grammatical acquisition: Inductive bias and coevolution of language and the language acquisition device. In *Language*, volume 76. Linguistic Society of America, 2000.
- [Choi *et al.*, 2018] Edward Choi, Angeliki Lazaridou, and Nando de Freitas. Compositional obverter communication learning from raw visual input. In *International Conference on Learning Representations (ICLR)*, 2018.
- [Christiansen and Kirby, 2003] Morten H. Christiansen and Simon Kirby. Language evolution: consensus and controversies. *Trends in cognitive sciences*, 7(7):300–307, 2003.
- [Cornish *et al.*, 2009] Hannah Cornish, Monica Tamariz, and Simon Kirby. Complex adaptive systems and the origins of adaptive structure: What experiments can tell us. *Language Learning*, 59(s1):187–205, 2009.
- [Dagan *et al.*, 2019] Gautier Dagan, Dieuwke Hupkes, and Elia Bruni. Co-evolution of language and agents in referential games. *pre-print*, 2019.
- [Das *et al.*, 2017] Abhishek Das, Satwik Kottur, José M.F. Moura, Stefan Lee, and Dhruv Batra. Learning cooperative visual dialog agents with deep reinforcement learning. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, 2017.
- [Foerster *et al.*, 2016] Jakob Foerster, Ioannis Alexandros Assael, Nando de Freitas, and Shimon Whiteson. Learning to communicate with deep multi-agent reinforcement learning. In *Advances in Neural Information Processing Systems*, pages 2137–2145, 2016.
- [Gülçehre and Bengio, 2016] Çağlar Gülcöhre and Yoshua Bengio. Knowledge matters: Importance of prior information for optimization. *Journal of Machine Learning Research*, 17(8):1–8:32, 2016.
- [Havrylov and Titov, 2017] Serhii Havrylov and Ivan Titov. Emergence of language with multi-agent games: Learning to communicate with sequences of symbols. In *NIPS*, 2017.
- [Kingma and Ba, 2015] Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations (ICLR)*, 2015.
- [Kirby *et al.*, 2008] Simon Kirby, Hannah Cornish, and Kenny Smith. Cumulative cultural evolution in the laboratory: An experimental approach to the origins of structure in human language. *Proceedings of the National Academy of Sciences*, 2008.
- [Kirby *et al.*, 2014] Simon Kirby, Tom Griffiths, and Kenny Smith. Iterated learning and the evolution of language. *Current Opinion in Neurobiology*, 28:108–114, 2014.
- [Kirby, 2001] Simon Kirby. Spontaneous evolution of linguistic structure—an iterated learning model of the emergence of regularity and irregularity. *IEEE Trans. Evolutionary Computation*, 5:102–110, 2001.
- [Kirby, 2002] Simon Kirby. Natural language from artificial life. In *Artificial Life*, 2002.
- [Kottur *et al.*, 2017] Satwik Kottur, José M. F. Moura, Stefan Lee, and Dhruv Batra. Natural language does not emerge ‘naturally’ in multi-agent dialog. In *EMNLP*, 2017.
- [Lake and Baroni, 2018] Brenden M. Lake and Marco Baroni. Generalization without systematicity: On the compositional skills of sequence-to-sequence recurrent networks. In *ICML*, 2018.
- [Lazaridou *et al.*, 2017] Angeliki Lazaridou, Alexander Peysakhovich, and Marco Baroni. Multi-agent cooperation and the emergence of (natural) language. In *International Conference on Learning Representations (ICLR)*, 2017.
- [Lazaridou *et al.*, 2018] Angeliki Lazaridou, Karl Moritz Hermann, Karl Tuyls, and Stephen Clark. Emergence of linguistic communication from referential games with symbolic and pixel input. In *International Conference on Learning Representations (ICLR)*, 2018.
- [Lee *et al.*, 2018] Jason D. Lee, Kyunghyun Cho, Jason Weston, and Douwe Kiela. Emergent translation in multi-agent communication. *CoRR*, abs/1710.06922, 2018.
- [Li and Bowling, 2019] Fushan Li and Michael Bowling. Ease-of-teaching and language structure from emergent communication. *CoRR*, abs/1906.02403, 2019.
- [Mordatch and Abbeel, 2018] Igor Mordatch and Pieter Abbeel. Emergence of grounded compositional language in multi-agent populations. In *AAAI*, 2018.
- [Nowak and Krakauer, 1999] Martin A. Nowak and David C. Krakauer. The evolution of language. *Proceedings of the National Academy of Sciences of the United States of America*, 96(14):8028–33, 1999.
- [Nowak *et al.*, 2000] Martin A. Nowak, Joshua B. Plotkin, and Vincent A A Jansen. The evolution of syntactic communication. *Nature*, 404:495–498, 2000.

- [Perfors, 2002] Amy Perfors. Simulated evolution of language: a review of the field. *J. Artificial Societies and Social Simulation*, 5, 2002.
- [Pinker and Bloom, 1990] Steven Pinker and Paul Bloom. Natural language and natural selection. *Behavioral and brain sciences*, 13(4):707–727, 1990.
- [Raviv *et al.*, 2018] Limor Raviv, Antje Meyer, and Shiri Lev-Ari. Compositional structure can emerge without generational transmission. *Cognition*, 182:151–164, 2018.
- [Scott-Phillips and Kirby, 2010] Thomas C. Scott-Phillips and Simon Kirby. Language evolution in the laboratory. *Trends in cognitive sciences*, 14 9:411–7, 2010.
- [Smith *et al.*, 2003] Kenny Smith, Simon Kirby, and Henry Brighton. Iterated learning: A framework for the emergence of language. *Artificial Life*, 9:371–386, 2003.
- [Smith, 2006] Kenny Smith. Cultural evolution of language. *Encyclopedia of Language and Linguistics 2 Edition*, 2:315–322, 2006.
- [Spike *et al.*, 2017] Matthew Spike, Kevin Stadler, Simon Kirby, and Kenny Smith. Minimal requirements for the emergence of learned signaling. In *Cognitive Science*, 2017.
- [Sukhbaatar *et al.*, 2016] Sainbayar Sukhbaatar, Arthur Szlam, and Rob Fergus. Learning multiagent communication with backpropagation. In *NIPS*, 2016.
- [Tomasello, 1999] Michael Tomasello. *The cultural origins of human cognition*. Harvard university press, 1999.
- [Vogt, 2005] Paul Vogt. The emergence of compositional structures in perceptually grounded language games. *Artificial intelligence*, 167(1-2):206–242, 2005.

A Appendix

A.1 Results on Novel Instance Dataset of [Kottur et al., 2017]

In section 2 of the main paper we discuss the difference between the novel instance and novel pair datasets. Our novel pair dataset is a more difficult compositional split, than the one in [Kottur et al., 2017]. For comparison, in this section we train and evaluate our models on the novel instance from [Kottur et al., 2017] to show that our approach still improves compositionality in this setting and to show that our new dataset is indeed more difficult.

In Fig. 5 test set accuracies (with standard deviations) are reported by training and evaluating the same models as in our main results (figure 2 main paper) against the dataset from [Kottur et al., 2017]. These results do not perform cross-validation, following [Kottur et al., 2017]. They only vary across 4 different random seeds. Our proposed approach still outperforms models without replacement and without multiple agents. Furthermore, by comparing the approaches from Fig. 5 to figure 2 from the main paper we can see much lower performance across the board on the novel pair than on the novel instance dataset used here. This indicates the novel instance dataset is significantly easier than our new dataset, and that our models encourage compositionality in both settings.

A.2 Replacement Strategies

Our approach to cultural transmission periodically replaces agents by re-initializing them. The approach section outlines various replacement strategies (policy π), but does not detail their implementation. We do so here.

These strategies depend on a number of possible inputs:

- e the current epoch
- E the period of agent replacement
- v_i^Q/v_i^A the validation accuracy of agent i for Q-bots/A-bots. For Q-bots this is averaged over all potential A-bot partners, and vice-versa for A-bots.
- a_i^Q/a_i^A the age in epochs of agent i for Q-bots/A-bots

Single Agent strategies are given in Alg. 2 and Alg. 3. Multi Agent strategies are given in Alg. 4, Alg. 5, and Alg. 6. Note that Single Agent strategies always replace one agent while Multi Agent strategies always replace one Q-bot and one A-bot.

Algorithm 2: Single Agent - Random Replacement

```

1  $d \sim \mathcal{U}\{0, 1\}$ 
2 if  $d = 0$  then
3   return { A-bot }
4 else
5   return { Q-bot }
```

A.3 Visualization for Language Comparison at Different Training Stages

In this section we visualize the language learned by agents at various stages of training to reinforce our previous conclu-

Algorithm 3: Single Agent - Alternate Replacement

```

1 Input:  $e$ 
2 if  $\lfloor e/E \rfloor = 0$  then
3   return { A-bot }
4 else
5   return { Q-bot }
```

Algorithm 4: Multi Agent - Uniform Random Replacement

```

1  $i_A \sim \mathcal{U}\{1, N_A\}$ 
2  $i_Q \sim \mathcal{U}\{1, N_Q\}$ 
3 return { A-bot  $i_A$ , Q-bot  $i_Q$  }
```

Algorithm 5: Multi Agent - Epsilon Greedy Replacement

```

1 Input:  $v_i^Q \forall i, v_i^A \forall i, \varepsilon \in [0, 1)$  (usually 0.2)
2  $d \sim \mathcal{U}[0, 1)$ 
3 if  $d < \varepsilon$  then
4    $i_A \sim \mathcal{U}\{1, N_A\}$ 
5    $i_Q \sim \mathcal{U}\{1, N_Q\}$ 
6 else
7    $i_A = \operatorname{argmin}_i v_i^A$  (unique in our experiments)
8    $i_Q = \operatorname{argmin}_i v_i^Q$  (unique in our experiments)
9 return { A-bot  $i_A$ , Q-bot  $i_Q$  }
```

Algorithm 6: Multi Agent - Oldest Replacement

```

1 Input:  $a_i^Q \forall i, a_i^A \forall i$ 
2  $i_A = \mathcal{U}\{\operatorname{argmax}_i a_i^A\}$ 
3  $i_Q = \mathcal{U}\{\operatorname{argmax}_i a_i^Q\}$ 
4 return { A-bot  $i_A$ , Q-bot  $i_Q$  }
```

sions and build intuition. This builds on the visualization described in section 5.3 of the main paper, so reference that section to individually understand the three sub-figures in Fig. 6.

Each of the three sub-figures in Fig. 6 summarizes all of the conversations between a particular pair of bots for the (shape, color) task. From left to right: Fig. 6a summarizes the single pair from a Single Agent No Replacement run (3000 iterations old); Fig. 6b summarizes dialogs between an old Q-bot (about 23000 iterations) and a recently re-initialized A-bot (about 3000 iterations) at the 8th and final generation of a Multi Oldest run; Fig. 6c summarizes dialogs between the same old Q-bot as in Fig. 6b and an old A-bot (13000 iterations) from the same Multi Oldest experiment.

Even though the A-bots in Fig. 6a and Fig. 6b have trained for about² the same number of iterations, the A-bot trained in the presence of other bots which already know a functional language has already learned a somewhat compositional language whereas the Single Agent A-bot has not (Q-bot's gets

²Due to the stochastic nature of our Multi Agent approach.

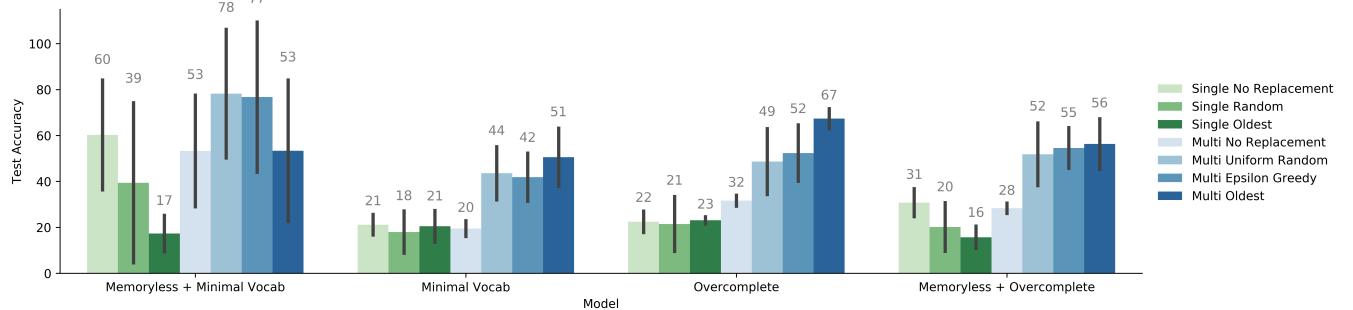


Figure 5: Test set accuracies (with standard deviations) are reported by training and evaluating the same models as in our main results (figure 2 main paper) against the dataset from [Kottur *et al.*, 2017]. These results do not perform cross-validation, following [Kottur *et al.*, 2017]. They only vary across 4 different random seeds. See Section A.1.

almost all star instances wrong in Fig. 6a, but not in Fig. 6b). Furthermore, by comparing the old A-bot’s language Fig. 6c with the new one Fig. 6b we can see that they are extremely similar. They even lead to the same mistakes (green circles, purple circles, red triangles). This correlation in mistakes again suggests that language is transmitted between bots, in agreement with our previous experiments.

A.4 Detailed Results

In our experiments we compare models and we compare replacement strategies. We ran dependent paired t-tests across random seeds, cross-val folds, and replacement strategies to compare models. We ran dependent paired t-tests across random seeds, cross-val folds, and models to compare replacement strategies. The p-values for all of these t-tests are reported here.

Replacement strategy comparisons are in Fig. 8 (Single Agent) and Fig. 9 (Multi Agent). Model comparisons are in Fig. 7.

Task: (shape, color)				Train	Val	Test
○ 20 ✓ ○ 21 ✓ ○ 22 ✗ ○ 22 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓			
○ 20 ✓ ○ 21 ✓ ○ 21 ✗ ○ 22 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓			
● 20 ✓ ● 21 ✓ ● 21 ✗ ● 22 ✓	● 03 ✓ ● 02 ✗ ● 01 ✗ ● 00 ✓	● 03 ✓ ● 02 ✗ ● 01 ✗ ● 00 ✓	● 03 ✓ ● 02 ✗ ● 01 ✗ ● 00 ✓			
○ 20 ✓ ○ 21 ✓ ○ 20 ✗ ○ 22 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓	○ 03 ✓ ○ 02 ✗ ○ 01 ✗ ○ 00 ✓			
□ 13 ✓ □ 21 ✗ □ 11 ✓ □ 12 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓			
□ 13 ✓ □ 23 ✓ □ 11 ✓ □ 12 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓			
■ 13 ✓ ■ 23 ✓ ■ 11 ✓ ■ 12 ✓	■ 23 ✓ ■ 22 ✓ ■ 21 ✓ ■ 20 ✓	■ 23 ✓ ■ 22 ✓ ■ 21 ✓ ■ 20 ✓	■ 23 ✓ ■ 22 ✓ ■ 21 ✓ ■ 20 ✓			
□ 13 ✓ □ 23 ✓ □ 11 ✓ □ 12 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓	□ 23 ✓ □ 22 ✓ □ 21 ✓ □ 20 ✓			
☆ 21 ✗ ☆ 21 ✗ ☆ 21 ✗ ☆ 02 ✓	☆ 13 ✓ ☆ 12 ✓ ☆ 11 ✓ ☆ 10 ✓	☆ 13 ✓ ☆ 12 ✓ ☆ 11 ✓ ☆ 10 ✓	☆ 13 ✓ ☆ 12 ✓ ☆ 11 ✓ ☆ 10 ✓			
☆ 21 ✗ ☆ 21 ✗ ☆ 21 ✗ ☆ 02 ✓	☆ 13 ✓ ☆ 12 ✓ ☆ 11 ✓ ☆ 10 ✓	☆ 13 ✓ ☆ 12 ✓ ☆ 11 ✓ ☆ 10 ✓	☆ 13 ✓ ☆ 12 ✓ ☆ 11 ✓ ☆ 10 ✓			
★ 21 ✗ ★ 21 ✗ ★ 21 ✗ ★ 22 ✗	★ 13 ✓ ★ 12 ✓ ★ 11 ✓ ★ 10 ✓	★ 13 ✓ ★ 12 ✓ ★ 11 ✓ ★ 10 ✓	★ 13 ✓ ★ 12 ✓ ★ 11 ✓ ★ 10 ✓			
★ 22 ✗ ★ 22 ✗ ★ 22 ✗ ★ 22 ✗	★ 13 ✓ ★ 12 ✓ ★ 11 ✓ ★ 10 ✓	★ 13 ✓ ★ 12 ✓ ★ 11 ✓ ★ 10 ✓	★ 13 ✓ ★ 12 ✓ ★ 11 ✓ ★ 10 ✓			
△ 03 ✓ △ 31 ✓ △ 01 ✓ △ 03 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗			
△ 03 ✓ △ 33 ✓ △ 01 ✓ △ 02 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗			
▲ 03 ✓ ▲ 33 ✓ ▲ 01 ✓ ▲ 02 ✗	▲ 33 ✓ ▲ 32 ✓ ▲ 31 ✓ ▲ 30 ✗	▲ 33 ✓ ▲ 32 ✓ ▲ 31 ✓ ▲ 30 ✗	▲ 33 ✓ ▲ 32 ✓ ▲ 31 ✓ ▲ 30 ✗			
△ 03 ✓ △ 33 ✓ △ 00 ✓ △ 02 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗	△ 33 ✓ △ 32 ✓ △ 31 ✓ △ 30 ✗			

(a) Gen 1 (Single) - New A-bot

(b) Gen 8 (Multi) - New A-bot

(c) Gen 8 (Multi) - Old A-bot

Figure 6: Each sub-figure summarizes an A-bot’s language, as described in section 5.3 of the main paper. By comparing the baseline of Fig. 6a to a similar pair of bots from our approach Fig. 6b we can see that our approach encourages compositional language to emerge. Furthermore, the similarity between Fig. 6b and Fig. 6c suggests language is indeed transmitted in our approach.

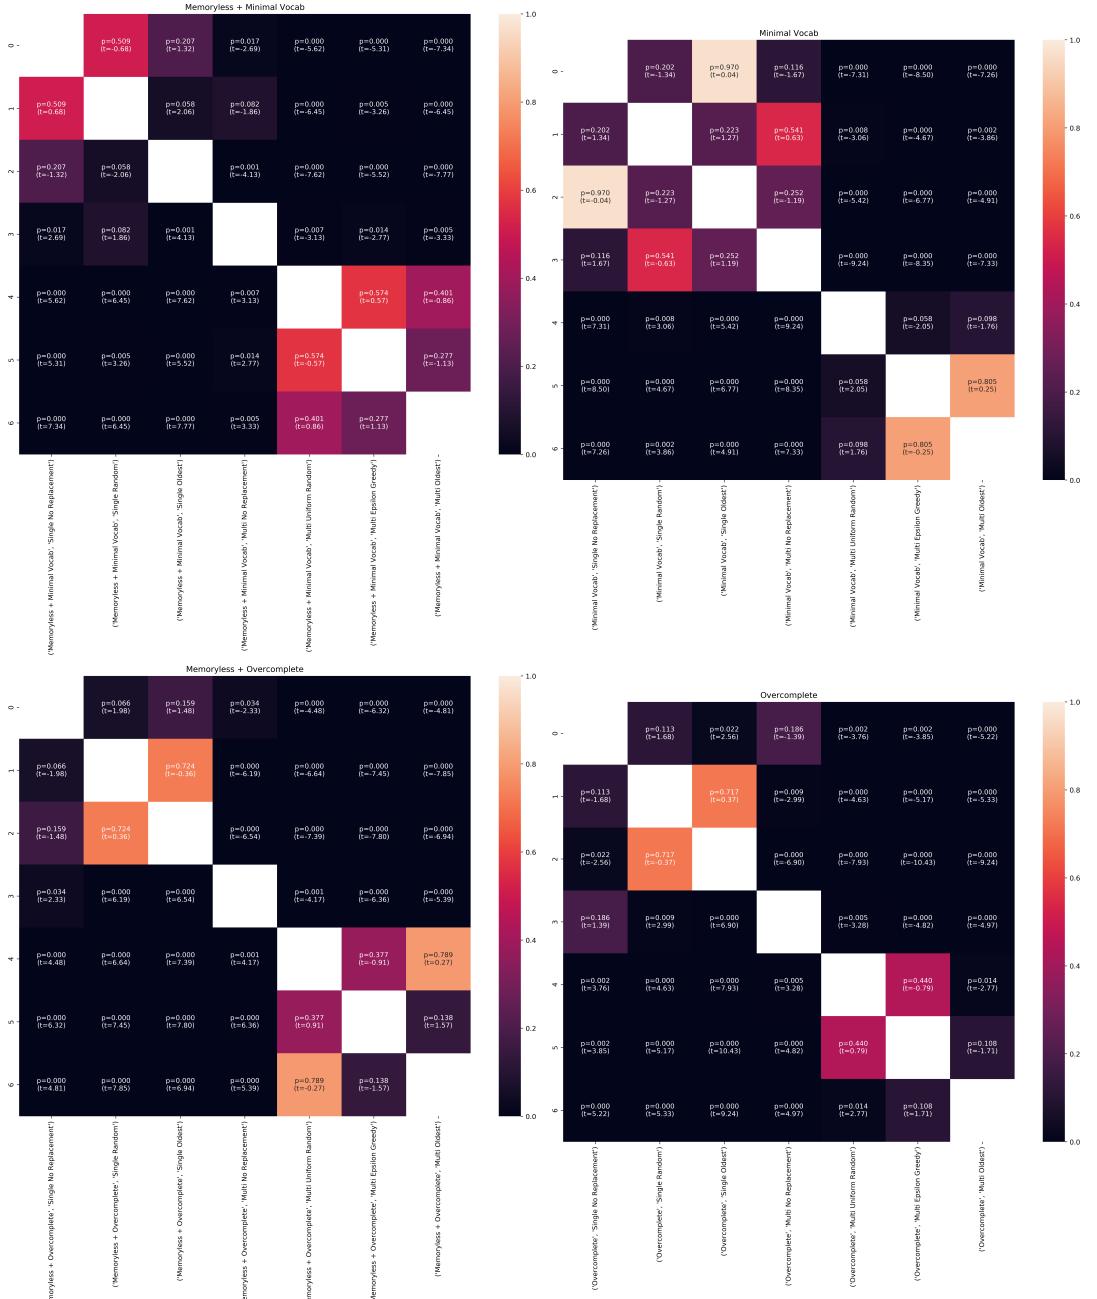


Figure 7: Replacement strategy comparison p-values.

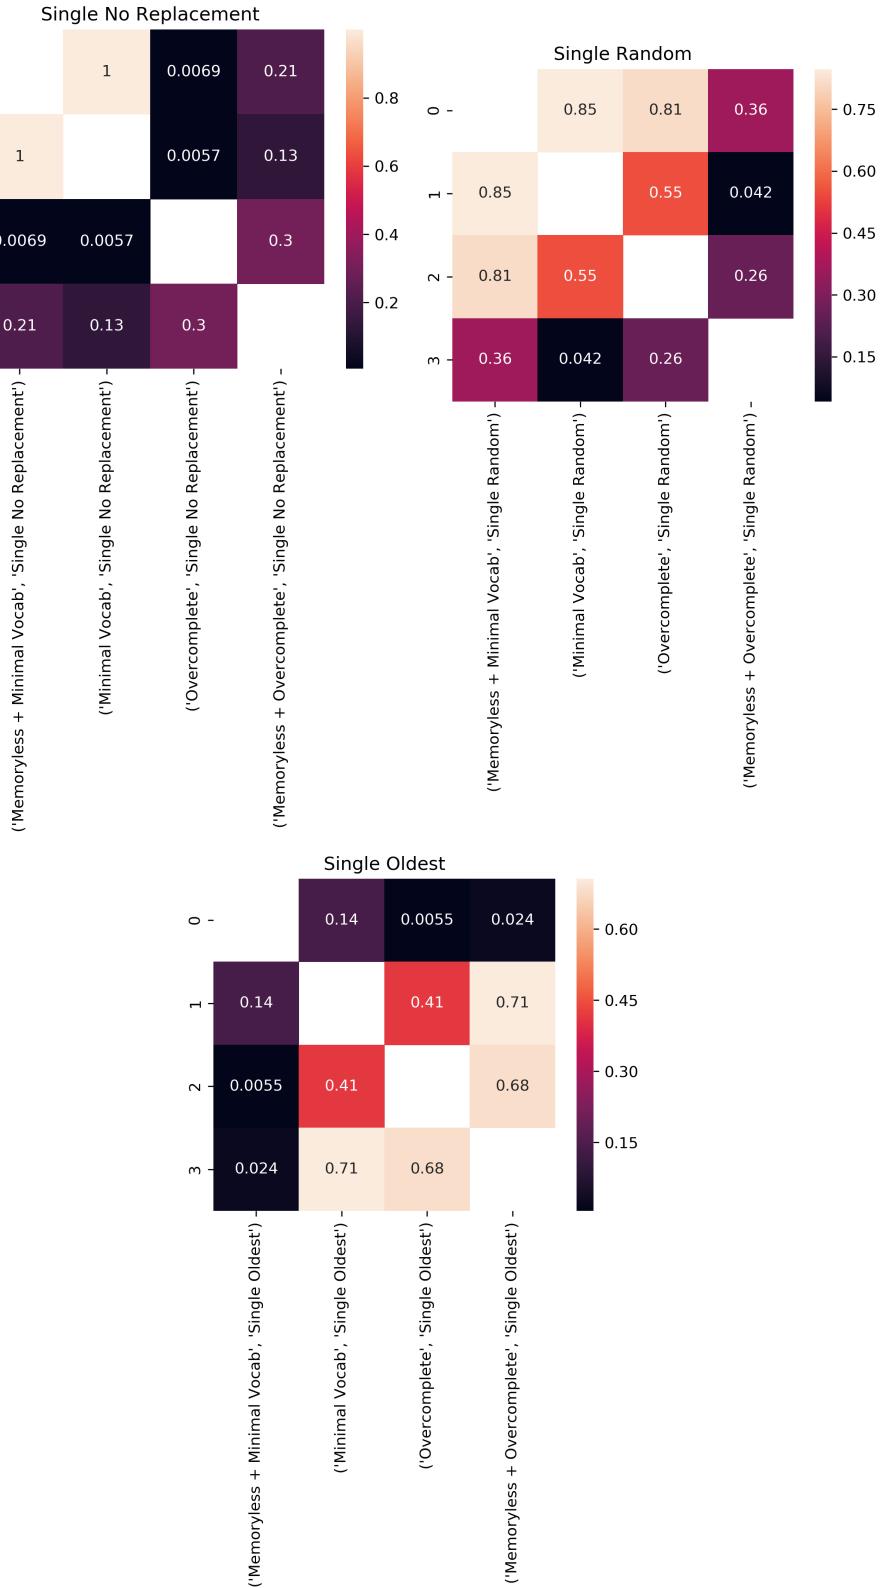


Figure 8: Single Agent model comparison p-values.



Figure 9: Multi Agent model comparison p-values.