

Amazon S3

Amazon S3 is an object storage service that offers industry-leading scalability, data availability, security, and performance.

Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.

Create bucket

 Introduction to Amazon S3 [Copy link](#)

With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.

[View pricing details](#) 

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region

US East (N. Virginia) us-east-1

Bucket type	Info
-------------	------

- ☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
 - ☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name	Info
bucket1	Info for bucket1
bucket2	Info for bucket2
bucket3	Info for bucket3
bucket4	Info for bucket4
bucket5	Info for bucket5
bucket6	Info for bucket6
bucket7	Info for bucket7
bucket8	Info for bucket8
bucket9	Info for bucket9
bucket10	Info for bucket10

bucket-01-25-11-2024

Bucket name must be unique within the global namespace and follow the bucket naming rules. See rules for bucket naming [2]

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

- ☐ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
 - ☒ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

⚠️ We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

- Bucket owner preferred

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**

Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ **Block public access to buckets and objects granted through *new* access control lists (ACLs)**

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ **Block public access to buckets and objects granted through *any* access control lists (ACLs)**

S3 will ignore all ACLs that grant public access to buckets and objects.

☐ **Block public access to buckets and objects granted through *new* public bucket or access point policies**

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ **Block public and cross-account access to buckets and objects through *any* public bucket or access point policies**

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

⚠ Turning off block all public access might result in this bucket and the objects within becoming public

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ Disable

☐ Enable

Tags - *optional* (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

Search

[Alt+S]

Amazon S3

Buckets

Create bucket

N. Virginia

man

Bucket Versioning

☒ Disable

☐ Enable

Tags - *optional* (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

Add tag

Default encryption Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type

Info

☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)

☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)

☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Secure your objects with two separate layers of encryption. For details on pricing, see DSSE-KMS pricing on the [Storage](#) tab of the [Amazon S3 pricing page](#).

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable

☒ Enable

► Advanced settings

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel

Create bucket

Objects **Properties** **Permissions** **Metrics** **Management** **Access Points**

Objects (0) Info

Copy S3 URI

 Copy URL

Download

Open

Delete

Actions ▼

Create folder

⬆ Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

< 1 > | ⚙

Name	Type	Last modified	Size	Storage class
------	------	---------------	------	---------------

No objects

You don't have any objects in this bucket.

Upload

Upload Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (0)

All files and folders in this table will be uploaded.

Find by name

	Name	Folder	Type	Size
--	------	--------	------	------

No files or folders

You have not chosen any files or folders to upload.

Destination [Info](#)

Destination

s3://bucket-01-25-11-2024 [↗](#)

► **Destination details**

Destination details
Bucket settings that impact new objects stored in the specified destination.

► Permissions

Grant public access and access to other AWS accounts.

► Properties

Properties
Specify storage class, encryption settings, tags, and more.

Cancel

Upload

Upload: status Close


Summary

Destination s3://bucket-01-25-11-2024	Succeeded ✔ 1 file, 81.4 KB (100.00%)	Failed ⚠ 0 files, 0 B (0%)
---	---	--------------------------------------

Files and folders

Configuration

Files and folders (1 total, 81.4 KB)

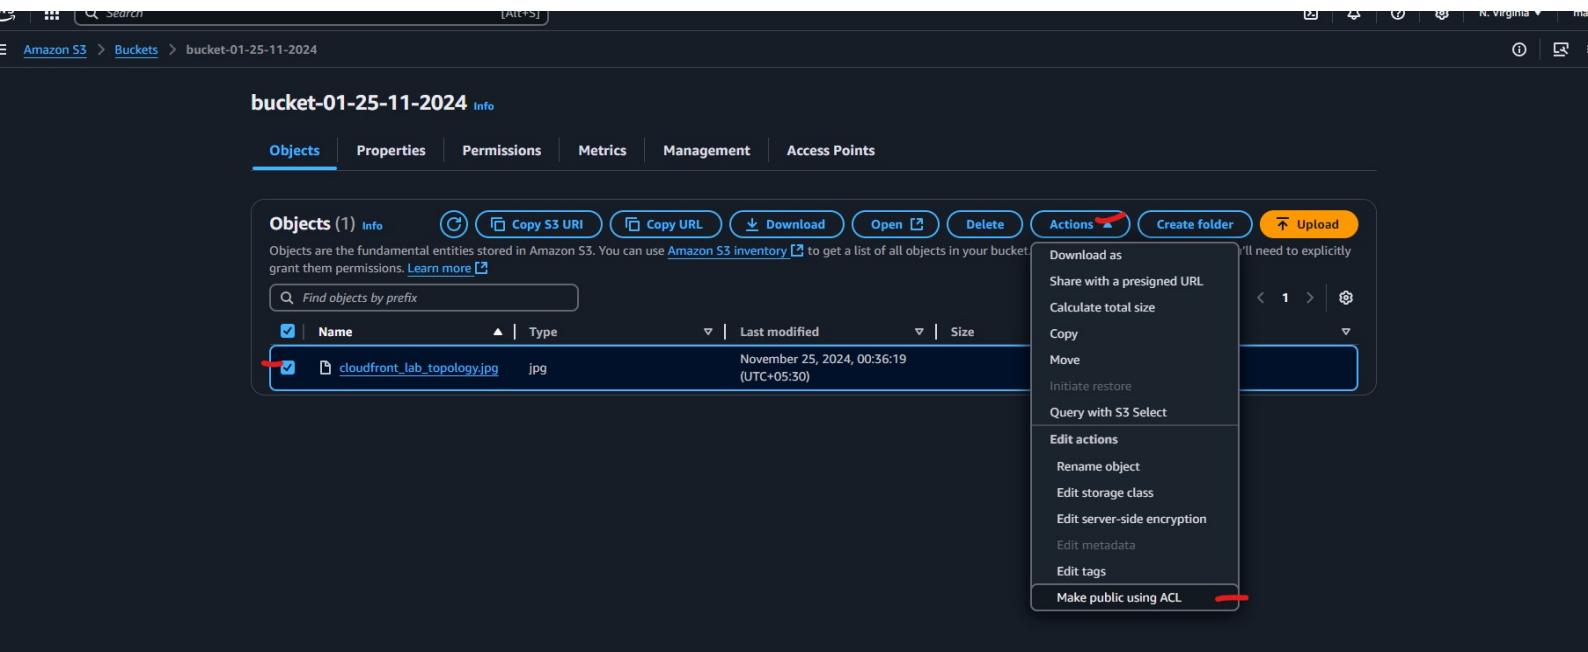

Search

[Alt+F5]

🔍

🔔

🔄

🔒

N. Virginia

main

🔍

🔗

🔍 Successfully edited public access

View details below.

✕

Make public: status

Close

🔔 After you navigate away from this page, the following information is no longer available.

Summary

Source

s3://bucket-01-25-11-2024

Successfully edited public access

🟢 1 object, 81.4 KB

Failed to edit public access

0 objects

Failed to edit public access

Configuration

🔔 Failed to edit public access (0)

🔍 Find objects by name

Name

▲

Folder

▼

Type

▼

Last modified

▼

Size

▼

Error

▼

No objects failed to edit

Amazon S3 > Buckets > bucket-01-25-11-2024 > cloudfront_lab_topology.jpg

cloudfront_lab_topology.jpg Info

Copy S3 URIDownloadOpenObject actions

PropertiesPermissionsVersions

Object overview

Owner

mann9776

AWS Region

US East (N. Virginia) us-east-1

Last modified

November 25, 2024, 00:36:19 (UTC+05:30)

Size

81.4 KB

Type

jpg

Key

cloudfront_lab_topology.jpg

S3 URI

s3://bucket-01-25-11-2024/cloudfront_lab_topology.jpg

Amazon Resource Name (ARN)

arn:aws:s3:::bucket-01-25-11-2024/cloudfront_lab_topology.jpg

Entity tag (Etag)

9aca72cfaa6c1fb253eb3edcb28c2552

Object URL

https://bucket-01-25-11-2024.s3.us-east-1.amazonaws.com/cloudfront_lab_topology.jpg

