

Letter Sections:

A	1
B	1
C	1
D	1
E	1
F	1
G	1
H	1
I	1
J	1
K	1
L	1
M	1
N	1
O	1
P	1
Q	1
R	1
S	1
T	1
U	1
V	1
W	1
X	1
[.....	1

Table of Contents

Letter Sections:

A	pg. [TBD]
B	pg. [TBD]
C	pg. [TBD]
D	pg. [TBD]
E	pg. [TBD]
F	pg. [TBD]
G	pg. [TBD]
H	pg. [TBD]
I	pg. [TBD]
J	pg. [TBD]
K	pg. [TBD]
L	pg. [TBD]
M	pg. [TBD]
N	pg. [TBD]
O	pg. [TBD]
P	pg. [TBD]
Q	pg. [TBD]
R	pg. [TBD]
S	pg. [TBD]
T	pg. [TBD]
U	pg. [TBD]
V	pg. [TBD]
W	pg. [TBD]
X	pg. [TBD]
[.....	pg. [TBD]

A

Access Level

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Accordion

Expandable/collapsible content container.

Categories: UX

ACS Data Collection

The new name for Launch.

Categories: ACS Data Collection

Action Type

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

ActionBar

Row of context-aware buttons (e.g. Save, Edit, Delete).

Categories: UX

ActionButton

A button that performs an action with minimal visual weight.

Categories: UX

Activation

The process of making audience segments available for use in marketing channels and destinations.

Categories: CJA, RT-CDP Collaboration

Admin Console

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Admin Controls Dashboard


> Admin Controls Dashboard It provides centralized setup access for : Data Sources Events Actions Reporting Each of these is a configurable building block used to power journeys, decisions, and activations. In the context of documentation or your dictionary, you could define it as : Admin Controls Dashboard : The primary configuration hub in Adobe Journey Optimizer used to manage data inputs (sources), event triggers, outbound actions, and reporting schemas.

Categories: AJO

Adobe Analytics source connector (AASC)

Connect AA report suites + classifications into .AEP.0 for unified profile + analysis What Is It? .AASC.0 streams hit-level data and classifications from .0Adobe Analytics.0 into .0AEP.0 via the .0Sources.0 interface. Supports both real-time and historical data flow (up to 13 months back). Use Case : Unified Ingestion < Bring in AA + SAINT data for activation in .0RTCDP.0 and analysis in .0CJA.0. < Stream current activity + enrich with historical classifications (e.g. campaign, product). Behavior Notes Æ Backfill is limited to 13 months from setup — even if AA stores 25 + months. Æ Classification changes (SAINT) take ~4–6 hours to reflect in AEP. Æ If disabled, no new data ingests , but existing data remains in .0datasets.0 + .0profiles.0. Æ Re-enabling after > 13 months triggers fresh 13mo backfill , not resume. Æ Changing schemas or remapping fields may trigger duplicates or errors . Best Practice Æ ' Set it up once and don't mess with it. Avoid disabling/re-enabling unless strictly necessary. Treat as a production-grade pipeline , not a testbed.

Image:

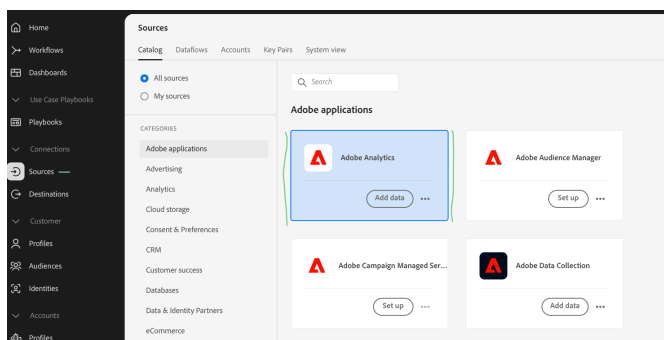

Adobe Spark

Adobe Spark (Misnomer) Ø>Ý/ Not Spark. Not Adobe. Just legacy confusion. Ø>Ýà AEP Query Service runs on Trino, not Spark SQL. Ø>Ýé What Is “Adobe Spark”? The term “Adobe Spark SQL” appears in some early Adobe Experience Platform (AEP) documentation and training materials, but it’s a misleading label . It does not refer to Apache Spark, nor is there a real Adobe product called “Adobe Spark” within the AEP ecosystem. Instead, it was an early brand or internal codename for Adobe’s evolving data infrastructure. In practice, when you query datasets in AEP using the Query Service , you’re actually using Trino — a distributed SQL engine formerly known as PrestoSQL . This engine allows you to run SQL queries over Parquet-based datasets using schema-on-read, powered by the XDM (Experience Data Model) schema framework. Ø=Ü; So What Is Trino? Trino is an open-source, massively parallel SQL query engine designed for interactive analytics over large-scale data lakes. It supports many backends, including Hive, MySQL, S3, and Google Cloud Storage. Originally developed at Facebook as Presto , it was forked by the original engineers into Trino (formerly PrestoSQL) in 2019. Today, Trino is widely adopted by companies like Netflix, LinkedIn, Shopify, Uber, and Adobe , and is known for its speed, scalability, and support for ANSI SQL. Adobe uses Trino behind the scenes to power the AEP Query Service , letting users write queries using standard SQL to interact with data stored in Parquet format. The system allows identity-stitched data to be queried without moving it into traditional relational databases. Ø=Ý Why This Matters for AEP Users If you tell GPT or another system to write “Adobe Spark SQL,” it will likely produce Apache Spark SQL , which is not compatible with what Adobe Query Service expects. Instead, AEP users should write Trino-style ANSI SQL , with awareness of JSON field navigation and schema-on-read practices. So when working in AEP Query Service : You’re using Trino SQL , not Spark There’s no “Adobe Spark engine” The term is a leftover from Adobe’s early marketing and documentation ' Summary “Adobe Spark SQL” = ' þ Not real AEP Query Service = ' Trino / PrestoSQL Adobe Spark = Ø>Ýè Confusion, not a product If you’re working with Query Service, always think in terms of Trino SQL , and ignore references to “Adobe Spark” unless you’re reading legacy materials.

Adobe-supplied lookups

See <https://lexicon.aep.com/term/standard-lookups>

Advertiser

Any entity that will spend marketing budget to reach audiences across publishers or other brand partners to achieve goals of brand awareness, prospecting, re-engagement, and conversions.

Categories: RT-CDP Collaboration

Algorithmic Pruning

Algorithmic Pruning (CJA) - Automated removal of low-value dimensions or metrics in .CJA.0 to enhance query performance

What Is Algorithmic Pruning? .0Algorithmic pruning.0 is a behind-the-scenes performance optimization used in .0Customer Journey Analytics (CJA).0. Adobe's query engine automatically excludes unused or irrelevant data fields during query execution — especially in wide schemas with high cardinality.

Use Case : Large Schema Optimization

When a dataset has : 100 + dimensions or metrics

- High-cardinality fields not used in current report
- Sparse data with low impact on output .0CJA.0 prunes unused fields to reduce processing time and memory usage.

Old AA Analogy ; an advancement on how it would put big rocks of data in buckets when > 2m customers (big In USA, UK not so much as not many companies have > 2m customers)

Categories: CJA

Analytics Inventory

New in May 2025

Categories: [New Term Dropzone]

API Connector

A tool that allows users to bring data from third-party sources into Adobe Experience Platform via RESTful APIs.

Categories: CJA, UX

Approved Components

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Attribution

A way to identify marketing touchpoints along the customer journey that contribute to success. Commonly applied to conversion events, it can also be used to assign credit for any success event throughout the customer lifecycle. Attribution helps marketers understand which parts of their marketing efforts are most effective.

Categories: CJA

Attribution Analysis

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Attribution Model

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Average number of daily events

On the connection create dialog Ø=ÛË Reflects the typical volume of event records ingested per day into .0CJA.0 from linked event datasets. Ø=Ý Used for performance planning, billing awareness, and system scaling. What Is It? This is the calculated average of all ingested rows from .0event datasets.0, measured daily. It gives Adobe and users a sense of how large the dataset is — not in GB, but in record count. UC : Monitoring Data Scale If your connection shows 2.4M daily events , it likely includes web tracking, app events, and backend signals. That insight helps you anticipate Workspace speed, retention windows, and cost thresholds. Why It Matters ' Forecasts ingestion volume ' Identifies heavy datasets ' Supports retention and windowing decisions Gives a rough health check on whether you need to optimize event granularity or schema usage.

Categories: CJA

Backfill

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Bar Chart

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Binding Dimension

In a connection, the component that is used to join datasets together. It is selected when creating a connection between datasets.

Categories: CJA

Binding dimensions

use to be called merchie evars!

Categories: AA (Adobe Analytics)

Breadcrumbs

Navigation path shown at the top of a page.

Categories: UX

Breakdown

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Business Event

A derived or meaningful user interaction composed of one or more unitary events. Examples include cart abandonment, product purchase, or booking confirmation. Often used to trigger journeys and measure business outcomes.

Categories: AEP

C

C12 Field

What Is .OC12.0? C12 is a data usage label (DULE) in Adobe Experience Platform that means “No General Data Export.” When assigned to a schema field, it allows that field to be used for analysis inside Adobe Customer Journey Analytics (CJA), but prevents the field from being exported through any of CJA’s external interfaces. This includes CSV downloads, Report Builder, Workspace exports, APIs, and the BI Extension (PostgreSQL access through Query Service). **Use Case : Internal-Only Metrics or Sensitive Fields** C12 is often used for sensitive fields such as internal classification codes, licensing-restricted data, or legally protected attributes. It allows analysts to work with the data inside Workspace while preventing downstream leakage into external systems or reports. **Why It Matters** C12 ensures that certain fields are kept strictly within the Adobe ecosystem, even if analysts interact with them. This enforces data residency policies, commercial confidentiality, or data sharing restrictions — all without sacrificing analytical capabilities inside the product.

Categories: Data Governance

C8 Field

.OC8 – No Measurement. Ø=Ý Prevents data from being used in analytics or reporting **What Is .OC8.0?** C8 is a data usage label defined in Adobe Experience Platform’s governance framework that stands for “No Measurement.” When applied to a schema field, it prevents that data from being surfaced or used in any Adobe Customer Journey Analytics (CJA) reporting or segmentation functionality. Fields marked with C8 are ingested and stored in the AEP Data Lake, but they are strictly excluded from all measurement surfaces — including Connections, Data Views, components, calculated metrics, filters, and visualizations. **Use Case : Restricting PII from Analytics** A common use case for C8 is when sensitive data — such as national ID numbers, free-text search queries, or email addresses — must be stored for personalization, profile identity resolution, or compliance audit purposes but should never appear in analytical interfaces or reports. **Why It Matters** C8 ensures that organizations can maintain high data governance standards by explicitly excluding certain fields from analytical usage. It reduces legal exposure, enforces consent restrictions, and supports regulatory compliance (e.g., GDPR, HIPAA) by guaranteeing that specific data will not be accessible to analysts or exportable through any CJA reporting path.

Categories: Data Governance

Calculated Metric

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Callout

Highlighted box showing tips or warnings.

Categories: UX

Channel Surfaces

Ø=Ý' Channel Surface Configuration Includes : Channel Type – Email, Push, SMS (via custom action), Webhook, etc. Sender Name – Display name that appears in the recipient's inbox (e.g., "Adobe Store"). Sender Email Address (From) – Email address used to send the message (e.g., noreply@yourbrand.com). Reply-To Email Address – Where replies are sent if the recipient responds. Technical Integration Details – API credentials, endpoints, or partner configurations for SMS, webhook, or custom channels. Associated Brand or Subdomain – Helps tie deliverability and tracking to a verified domain. Message Rendering Options – In some surfaces, configuration for content type or fallback options. Authentication Setup (Optional) – SPF/DKIM setup for email authentication (linked via domain configuration). Fallback Options (Push/Custom Only) – Backup behaviours if delivery fails (e.g., retry, skip). Activation Status – Whether the surface is live and usable in journeys.

Categories: AJO

Checkbox

Allows users to select one or more items from a set.

Categories: UX

Chiclet

Small box element showing applied filters or segments.

Categories: UX

Cloud storage

A cloud computing solution that enables storing data and files on the internet through a provider like AWS, Azure, or GCP.

Categories: RT-CDP Collaboration

Columnar

Refers to how data is stored by columns rather than rows. In Adobe Analytics, this enables fast reporting across predefined fields like eVars and props. In Adobe Experience Platform, columnar storage (e.g., Parquet) powers scalable querying of flexible ExperienceEvent-based schemas used in CJA.

Categories: AEP

Combined event datasets

Combined Event Datasets (CJA) > Merge multiple data streams into a single timeline view > Stitch sessions across platforms with shared identities

What Are Combined Event Datasets?

Combined event datasets are multiple .event datasets. from .Adobe Experience Platform (AEP)., merged in one .CJA connection. This enables cross-channel journey analysis using a shared identity key like ECID or CRM ID.

Use Case : Web + App Journeys

A retail brand merges website clickstream, mobile app events, and in-store transactions and call centre using email. Analysts gain one unified customer journey, without needing to switch reports.

Why They Matter

- Enable true omnichannel analytics
- Power accurate deduplication (e.g. Orders)
- Support identity stitching via .identity namespaces.

Unlock richer, multi-source visualizations in .CJA Workspace.

Ensure :

- Timestamp consistency
- Identity resolution setup
- Schema alignment (matching .field groups.)

Ø=βã

Always deduplicate metrics when combining overlapping sources.

Categories: CJA, [New Term Dropzone]

Complete Customer View

By stitching together data points, CJA provides a holistic view of individual customer journeys across all channels.

Categories: AJO

Component Governance

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Component Lookup

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Component Selection

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Component Usage Analytics

Component Usage Analytics refers to tracking how frequently metrics, segments, and dimensions are used across projects, users, and visualizations. It supports maturity assessments by showing which analytical assets are adopted, reused, or underutilized. Why It Matters This gap makes it harder to : Build a true maturity report based on feature and asset adoption Identify orphaned or unused components Prioritize enablement and governance efforts eg our org uses fallout reports, venn diagrams, etc Good for planning internal xcomms and Knowledge Transfer Sessions Use Case : Missing from CJA Customer Journey Analytics does not currently track how often a component is used. You cannot report on : How many projects use a key metric like “Form Opens” Which segments are most applied across teams Reuse of calculated metrics or shared components in dashboards We had this in R&A

Categories: CJA

Connection

A set of Customer Journey Analytics datasets that combines data from different sources. Connections enable the integration of data across datasets for use in reporting.

Image:

[Image available online: 1746738147231-612828381.webp]

Categories: CJA

Connection Errors

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Connection map

What Is a Connection Map in CJA? A Connection Map is a visual tool in .0Customer Journey Analytics (CJA).0 that shows how datasets (event, profile, lookup) are linked using foreign keys. It displays the relationships between datasets in a connection, helping you understand how identity stitching and lookups are configured. Use Case : Relationship Visualization It helps analysts and architects : Verify joins between .0event datasets.0 and .0lookup datasets.0 (e.g.

```
product_id
,
account_id
) Confirm which identity fields are used (e.g.
ECID
,
email
,
CRM ID
) Debug broken joins or missing schema fields
```

Image:

[Image available online: 1746743653990-25135869.webp]

Categories: CJA

Connection request

A formal request sent from one organization to another to establish a data-sharing connection.

Categories: RT-CDP Collaboration

Connection settings

Settings sent by the connection initiator to the collaborator after a request is accepted, governing collaboration rules.

Categories: RT-CDP Collaboration

Container

eg person

Image:



Containers

Person container name *

Household

Session container name *

Visit

Event container name *

Event

Categories: [New Term Dropzone]

Content Fragments

Content Fragment (Simple) Ø=Ý Reusable blocks of copy or assets used inside messages Ø=Üç Keeps tone, copy, and legal text consistent across journeys What Are Content Fragments (Simple)? In Adobe Journey Optimizer, a simple content fragment is a modular block of content—such as text, disclaimers, or images—that can be reused across multiple messages. These fragments are created within AJO and are meant for repeatable use cases like headers, legal footers, promotional banners, or call-to-action text. Use Case : Reusable Email Footer Rather than rewriting or copy-pasting your legal disclaimer in every email journey, you can create a content fragment once (e.g., “Offer valid while supplies last. T&Cs apply.”) and insert it into any email. If the wording needs to be updated, you edit the fragment once and the changes reflect wherever it’s used. Why They Matter Simple content fragments in AJO save time and maintain consistency. They are especially useful when scaling campaigns, collaborating across teams, or enforcing brand/legal standards. While they lack the advanced governance and multilingual tools of AEM Content Fragments, they deliver structured content reuse directly in the journey context.

Categories: AJO

Content Simulations

Categories: AJO

Conversion Event

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Conversion Variable

Also known as eVars, these are custom variables that allow you to see how different characteristics or actions relate to success events on your site or app.

Categories: CJA

Core Services

Foundational services in Adobe Experience Platform, including : Identity Service, Profile Service, Segmentation, Consent Catalog DULE. These services support key functionality across AEP applications like RTCDP, AJO, and CJA.

Categories: AEP

Create Sources (AJO Only)

What is "Create Sources" in AJO and why is it unique to AJO? It allows you to set up inbound APIs so that external systems (like weather services, POS systems, or flight status feeds) can send events directly into AJO . These sources often represent business events — not tied to a specific individual — and are designed to trigger journeys programmatically. Its incoming only Common Uses : Weather alert APIs Flight delay notifications In-store inventory updates Any real-time external system pushing JSON payloads These sources are often wired to business events in a journey, and followed by a Read Segment activity to find impacted users. Why It's AJO-Specific Unlike tools like Adobe Analytics or RT-CDP that rely on broader ingestion pipelines (e.g., streaming, batch), AJO lets you create a source right from the UI to accept journey-triggering payloads , which is powerful for event-driven orchestration.

Categories: AJO

Cross-channel analysis

Cross-channel analysis

Categories: CJA, [New Term Dropzone]

Cross-Channel Analysis

The ability to analyze customer behavior across different channels and devices. In CJA, this allows you to understand how customers interact with your business across web, mobile, in-store, and other touchpoints.

Categories: CJA

Curation

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Customer Journey Analytics

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

D

Data center region eg. VA7

What is VA7 ? VA = Virginia , USA (East Coast) 7 = Adobe's internal designation for a specific data center cluster Common in North American tenants of Adobe Experience Platform (AEP) , RTCDP , AJO , CJA , etc. ¿>Ýí Why does it matter? It affects data residency , latency , and endpoint URLs Example : Real-time API :

```
https://va7.adobedc.net
```

Streaming endpoint :

```
https://dcs.adobedc.net/collection/va7
```

Certain features may roll out to some regions (like va7) before others

Categories: [New Term Dropzone]

Data clean room

A secure environment allowing participants to use data assets with strict access controls for agreed uses.

Categories: RT-CDP Collaboration

Data collaboration

Combining and analyzing data within a company or with partners for targeting, measurement, and insights.

Categories: RT-CDP Collaboration

Data Collection Center

Data Collection Center

Categories: [New Term Dropzone]

Data connection

The source from where data is imported into RT-CDP Collaboration ; currently, only Experience Platform is supported.

Categories: RT-CDP Collaboration

data retention (CJA)

In the CJA context Rolling Retention Windows (CJA) Defines how long datasets are retained and available for query. Automatically enforces retention based on time of data ingest . What Are Rolling Retention Windows? In Customer Journey Analytics, each dataset has a rolling retention period (e.g. 13 months). This means data older than the retention window is automatically deleted from the dataset — not from the source system, just from CJA access. UC : 13-Month Retention You set a rolling window of 13 months. CJA will only retain and analyze events ingested in the most recent 13 months . On day 395, day 1's data is dropped automatically. Snag ; Correct — CJA data retention runs in fixed blocks : ' 3 months ' 6 months ' 13 months (default) ' 25 months ' 37 months 4 7 months is not possible You must choose one of the supported rolling windows — no custom durations. Yeah, 37 months is oddly specific — but intentional. Why 37 months? 3 years + 1 month Useful for brands needing : Fiscal YTD + prior 3 years Compliance with 3-year lookbacks Long-term attribution / CLTV analysis Adobe reasoning : “Many

enterprise clients asked for a 3-year view, but needed a buffer for delays in ingestion, late-arriving data, or fiscal year alignment.” Ø>Ýà It’s the maximum rolling window in .0CJA.0. &Ô Anything longer = not supported ' Example 1 : Rolling Window Checked (6 months) .0CJA Connection Setting.0 = 6-month rolling window .0Platform data availability.0 = 25 months .0Result.0 : CJA only ingests last 6 months .0Older data (19 months).0 is excluded, even if present in Platform ' p Use Case : Keep reports light, focused on recent behavior, control costs ' Example 2 : Rolling Window Unchecked (default) .0CJA.0 uses whatever data exists in .0AEP.0 .0Platform has.0 13 months of event data .0Result.0 : CJA backfills and shows full 13 months If Platform deletes 5 months !' CJA auto-shrinks to 8 months ' p Use Case : Trust .0AEP.0 to control retention centrally

Categories: CJA

Data sharing agreement

A contract outlining terms and conditions for data sharing between parties.

Categories: RT-CDP Collaboration

Data sources

In the context of CJA Web data Mobile App data POS data CRM data Survey data Call Center data Product data Accounts data Transaction data Customer Feedback data Other

Categories: [New Term Dropzone]

Data Usage Governance

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Data Usage Policy

&–p Enforces rules on how labeled data can be used What Are Data Usage Policies? Data Usage Policies are rules in Adobe Experience Platform that enforce restrictions based on labels like .0C8.0 or .0C12.0. Labels mark the data ; policies define what actions (e.g. export, analysis) are allowed or blocked. Adding a label eg c8 , C12 does not actually create the enforcement. Use Case : Blocking Export of Sensitive Fields If a field is labeled .0C12.0, a policy can block it from being exported through CJA reports, APIs, or BI tools — while still allowing it to be used inside Workspace. Why They Matter Without a policy, labels do nothing. Policies activate enforcement, ensuring compliance with privacy, legal, and data-sharing requirements.

Categories: Data Governance

Data View

A container for the components (dimensions, metrics) that Analysis Workspace pulls from. Data views are configured in CJA with specific components from your connection's datasets.

Categories: CJA

Data Workbench

Legacy analytics tool that provided multi-dimensional analysis of customer data across channels.

Categories: AA (Adobe Analytics), UX

Datastreams

datastreams

Image:

[Image available online: 1746734029996-539921893.webp]

Categories: AEP, [New Term Dropzone]

Date Range

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Decision Management

No definition provided. This term needs a definition.


Categories: AJO, [New Term Dropzone]

Delta Migration

Delta Migration : Organizations moved to the delta format can delete data from the Identity Service, Real-Time Customer Profile, and the data lake. This allows for more efficient and less expensive dataset operations. Deletion Capabilities : Users from delta-migrated organizations can choose to delete records from either a single dataset or all datasets. This selective deletion is not available to organizations that

have not undergone delta migration. Process : To initiate deletion, navigate to the Data Lifecycle section in the AEP UI and create a deletion request. Provide the necessary identity information so the system can determine which records to delete. These capabilities are particularly useful for maintaining data hygiene and complying with data privacy regulations. Experience League | Adobe

Image:

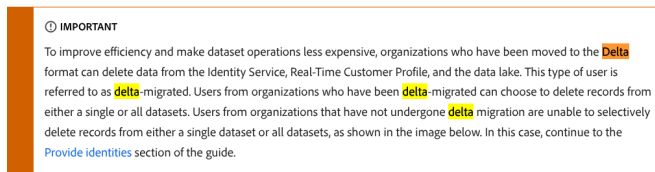

Categories: AEP

denormalized

Denormalized Data Ø=Üæ Flattened structure optimized for speed, not storage. Ø=Ý Reduces joins by repeating data across rows. What Is Denormalized Data? In .0AEP.0 and .0 CJA.0, denormalized data means storing all relevant attributes together in a single record, even if it causes redundancy. This is the opposite of a normalized database where data is split across relational tables. UC : Product Catalog Instead of storing

```
product_id
```

```
    and joining later to fetch
```

```
product_name
```

```
, a denormalized structure stores
```

```
product_name
```

```
,
```

```
price
```

```
,
```

```
category
```

directly within every event — simplifying processing and lookup. Why It Matters ' Faster query performance (no joins needed) ' Easier ingestion and export 'L Increased data volume and redundancy Ideal for analytics platforms like CJA where read speed outweighs storage cost. AEP is not an RDBMS!! Presto!

Categories: General Data Term

Derived Field

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Derived Fields


Custom fields in CJA created by applying formulas or logic to existing data. They help you tailor metrics or dimensions without changing the original dataset. Kinda replaces VISTA, Processing Rules, Marketing Channel processing rules

Categories: CJA

Device Co-op

Device Co-op.0 was a shared identity graph that allowed participating Adobe clients to link devices across brands using hashed login data and .0ECIDs.0. It enabled the “People” metric in .0Adobe Analytics.0 and cross-device targeting in .0Audience Manager.0. Use Case : Cross-Brand Identity Resolution Ø=Ý Stitch devices across brands using shared login signals Ø=ÜÊ Enable “People” metric in Analytics Ø<ß Power cross-device targeting in Audience Manager Behavior Notes &Ô As of August 31, 2022, .0Device Co-op.0 was officially deprecated. Ø=ÜÊ The “People” metric tied to Device Co-op was removed from Adobe Analytics on May 8, 2023. Ø=Ý Existing segments using Device Co-op may have experienced a decrease in size. Ø=Ý Users were advised to update their profile merge rules to alternative options. Best Practice Ø=Üj ' Transition to .0Private Device Graph.0 for identity stitching within your own data. ' For cross-device analytics, consider using .0Cross-Device Analytics (CDA).0 with field-based stitching. ' Update any legacy segments or merge rules that relied on Device Co-op.

Image:

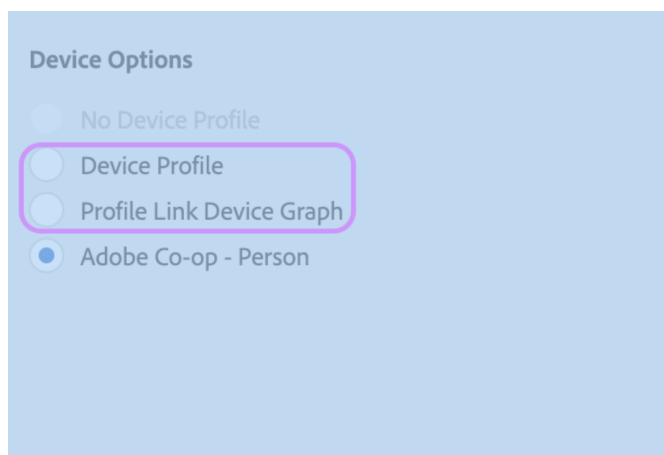

Categories: [New Term Dropzone]

Device identifier

A unique number associated with a device used for tracking and targeting.

Categories: Identity, RT-CDP Collaboration

Dialog

A modal window that interrupts the user with urgent information or requires a response.

Categories: UX

Dimension

A type of data component that contains variable values such as text strings. Examples include page name, marketing channel, or product name. Their values are typically displayed as rows in a report.

Categories: CJA

Direct Mail (aka snailmail)


Ø=Üè What Is “Direct Mail” in AJO? It's a channel placeholder , not a built-in printer or mailing system. It lets you design journeys that trigger external vendors to send postal mail. Typically used with custom actions or Experience Events that pass data to services like Lob, Quadient, etc. Ø=Pà How It Works : Select Direct Mail as the channel in a journey step. Choose a Custom Action or setup that sends relevant data (e.g. name, address, offer) to your vendor. The vendor handles printing & postage. So in short : AJO includes Direct Mail as a logical channel , but it requires external fulfilment via integration.

Categories: AJO

Dropzone

In Spectrum React, a DropZone is a UI component or pattern that : Allows users to drag and drop files or objects into a designated area for upload, interaction, or processing.

Image:

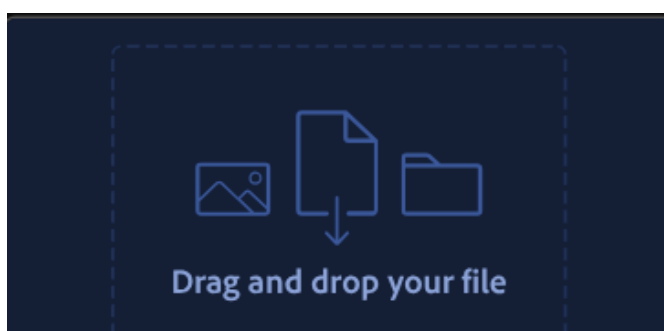

Categories: UX

DTM

Dynamic Tag Management, the predecessor to Adobe Experience Platform Tags for managing analytics and marketing tags.

Categories: CJA

DULE

DULE (Data Usage Labeling and Enforcement) is a governance framework in Adobe Experience Platform that allows organisations to label data (e.g. PII, sensitive, region-specific) and enforce policies that control how that data can be used or activated. It ensures compliance by automatically blocking actions that violate defined usage rules. Example : If email addresses are labeled as pii, and a policy prohibits activating pii data to third-party destinations like Facebook, AEP will automatically block such an export to ensure data compliance.

Categories: Data Governance

Durable Profile Attributes

Categories: AEP

DWB

Adobe Data Workbench (DWB) — formerly known as Visual Sciences and later Omniture Discover on Premise — was Adobe's most powerful on-premise analytics platform in the early 2000s.

E

Edge Caching

A method of storing data or content closer to the user by using geographically distributed servers. In Adobe Experience Platform, edge caching helps reduce latency by serving data such as profiles, decisions, and consent flags from nearby edge nodes. Adobe Experience Platform (AEP) Stores profile fragments, consent data, and segmentation decisions at the edge Adobe Journey Optimizer (AJO)

Delivers decisioning results (e.g. offers) in milliseconds via edge nodes Adobe Web SDK (Alloy.js) Sends/receives data via Edge Network using cached elements Adobe Target (when using Edge Network) May cache response logic to improve test/personalisation speed

Categories: AEP

Edge Configuration

Settings that determine how data is processed at the edge network for real-time personalization.

Categories: CJA, RT-CDP Collaboration

Edge Segmentation

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Edge Segmentation Readiness

#ñp Timeline for Edge Segmentation Readiness : ' ~1 hour – Audience definitions become available at the edge 'L Not immediate – They are not usable for edge segmentation instantly upon creation 'L Not 24 hours or a week – Longer timeframes apply to batch segmentation or full profile merges, not edge logic This latency exists to allow for syncing, indexing, and distributing the segment logic across Adobe's global Edge infrastructure. Once propagated, edge segments can begin evaluating in real time against device-based events.

Categories: Exams

Effective Marketing

Armed with this knowledge, you can create more meaningful, relevant, and effective marketing campaigns.

Categories: AJO

Eligibility Rule

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Ellipsis

In Adobe UIs (built with Spectrum React), an ellipsis refers to the ... icon, commonly used for :

- Compact UI : keeps interfaces clean by hiding less-used options
- Contextual actions : actions specific to a row, item, or card

Categories: UX

Email surface

What It Contains :

- Friendly sender name (e.g. "Barry's Bikes")
- From address (e.g. hello@barrysbikes.com)
- Reply-to address
- Associated channel (Email)
- Linked message templates
- Delivery platform (typically Adobe Campaign push or external ESP via custom channel)

Categories: AJO

Enforce Analytics Policy

Enforce Analytics Policy Prevents restricted fields from being used in Customer Journey Analytics

What Is Enforce Analytics Policy? An Enforce Analytics Policy is a type of Data Usage Policy in Adobe Experience Platform that blocks fields with certain governance labels (such as C8 – No Measurement) from being used in Customer Journey Analytics. It ensures that those fields are not selectable in Connections, Data Views, or Workspace . They will be greyed out.

Use Case : Blocking C8 Fields in CJA

When a field is labeled with C8 and an Enforce Analytics Policy is active, the field will be automatically excluded from the left rail and cannot be added to any report, chart, or metric configuration within CJA.

Why It Matters This policy protects data governance by enforcing compliance at configuration time , not just during export. It helps organizations ensure that sensitive or restricted data is never exposed in analytics environments.

Categories: Data Governance

ePHI

ePHI = Electronic Protected Health Information It's a key term in healthcare compliance, especially under HIPAA (Health Insurance Portability and Accountability Act) .

Categories: AJO, Data Governance

Event

A measure of an action that has occurred, like a page view, click, add to cart, or purchase. In CJA, these are typically represented as metrics.

Categories: CJA

Event Dataset

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Event Forwarding

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Event-based Trigger

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Experience Data Model (XDM)


The standardized framework that Adobe Experience Platform uses to organize customer experience data. It provides a common structure and definition for data across Adobe applications.

Categories: CJA

External ID

Context ; CJA Calculated Metrics A machine-readable identifier (no spaces/special chars) for components like .0Calculated Metrics.0 Used by external tools to fetch that component from .0CJA.0 via API ' Examples of External Sources : Ø=ßã .0Adobe Experience Platform APIs.0 – pulling metrics into other AEP apps Ø=ÜÊ Power BI / Tableau – via .0CJA Query Service.0 or exports Ø=Ý Custom dashboards – calling .0CJA APIs.0 to populate visualisations Ø=Þàþ Automation tools – n8n, Make, Zapier via .0CJA REST API.0 Ø=Ü¬ Alerting systems – Slack/email via scheduled export referencing .0External ID.0

Image:

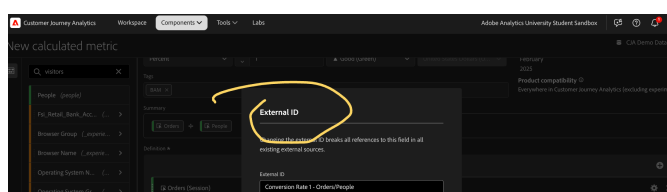

F

Fallout Analysis

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Federated Audience Composition

Federated Audience — Full Definition for Dictionary Definition : A Federated Audience in Adobe Experience Platform (AEP) is an audience segment created and managed in an external system (e.g., Adobe Audience Manager or a partner CDP), and shared into AEP for targeting and activation — without duplicating the underlying data. **Limitations** : Not Queryable : You cannot explore or analyse the raw data in Query Service or CJA. No Event/Attribute Access : A Federated Audience only includes : A list of profile IDs Basic metadata (e.g. source, audience name, last updated) It behaves like a black-box segment : usable in segmentation and activation, but not enriched with AEP-native traits or events. **Partner Integrations** : Federated Audiences integrate with external systems like : Adobe Audience Manager (AAM) LiveRamp Salesforce CDP Other data providers via B2B APIs or federated segmentation partners These integrations allow ID-based segments (e.g. cookies, hashed emails) to be federated into AEP and then used in : AJO Journeys RTCDP Destinations Campaigns and Offers Added to adobe july 2024

Categories: AEP

Field Groups

Field Groups (formerly Mixins) Reusable sets of XDM fields used to extend schemas in .Adobe Experience Platform. What Is It? .Field Groups. are modular groups of pre-defined fields used to build or extend .XDM Schemas. They were previously called Mixins but renamed for clarity. Use Case : Schema Modelling Add

Profile Person Details

to bring in

person.name

,

person.gender

, etc. Ø=ÞÍ Add

Commerce Order

to ingest

order.id

,

order.total

,

productListItems

Behavior Notes Ø=Ý "Mixin" = legacy term , replaced across UI + docs Ø>Ýé A schema is built by combining 1 + field groups Ø=ÜÜ Includes identity fields, timestamps, and nested objects Ø=Ý Some are standard (Adobe-defined), others custom (org-defined) Best Practice Ø=Üj ' Choose field groups based on business context (e.g. profile, event, product) ' Avoid creating redundant custom groups unless necessary ' Review field group structure before enabling for .0Profile.0 stitching

Categories: AEP

Field-Level Access

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Filter

Previously called segments in Adobe Analytics. A subset of your data created by defining rules and specific criteria. For example, you might create a filter for "customers from California who viewed more than 5 pages".

Categories: CJA

Filter Container

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Filtered Metric / Segmented Metrics

XXXXX

Categories: [New Term Dropzone]

Flattened Join

A flattened join in Adobe Experience Platform (AEP) refers to a simplified, one-directional relationship between two datasets. — typically from an XDM Profile or Experience Event dataset to a lookup table. Unlike relational databases, AEP does not support dynamic or many-to-many joins. Instead, data from the lookup table is merged into the referencing record at runtime based on a single key. Flattened joins are used in AEP to ensure compatibility with its underlying Parquet-based columnar storage , which is optimised for fast reads of denormalised data. Parquet performs best when data is wide and flat , not deeply nested or relational.

Flattening lookups at runtime allows AEP to maintain high performance across identity stitching, segmentation, and activation, especially at scale and in edge scenarios where low latency is critical. This model supports only one-to-one or many-to-one relationships. The primary dataset (e.g. a profile) must reference exactly one row in the lookup dataset . That row's values are then “flattened” into the profile during evaluation. This avoids relational complexity and supports fast, scalable profile stitching and segmentation. Examples : Profile Dataset Lookup Dataset ----- ----- userId : 123 tierId : gold name : Alice --- > discount : 10% tierId : gold tierLabel : Gold Tier userId : 123 name : Alice tierId : gold discount : 10% tierLabel : Gold Tier

Categories: Exams

Flow Analysis

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Flow Service

An API service used to collect and centralize customer data from various sources within Adobe Experience Platform.

Categories: CJA, UX

Flyout

A small panel that appears on hover or click for editing or preview.

Categories: UX

Foundation & Select

Use Case : CJA Licensing Strategy
Ø=Ü¼ Use .0Foundation.0 for entry-level B2C analysis with basic Adobe source data (e.g. AA + AEP)
Ø<ßâ Use .0Select.0 to unlock cross-channel data ingestion (e.g. CRM, call center), advanced connections, and more workspaces
Behavior Notes
Ø=ÜÊ .0Foundation.0 : Includes AA + RTCDP connections, limited data views, basic schema access
Ø=Þ€ .0Select.0 : Includes 10 + workspaces, 25 + data views, advanced dashboarding, more API bandwidth
Ø>Ýé Your entitlements define what shows in the CJA UI (e.g. Connections, Data View creation)
Ø=Ý Upgrade unlocks hidden features — no UI change needed
Best Practice
Ø=Üj ' Confirm which package your org is on before planning CJA implementation ' Use Adobe licensing portal or Admin Console to check entitlements ' Ask Adobe rep to activate features like CRM connector if available in your tier

Categories: AEP, [New Term Dropzone]

Freeform Table

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Frequency Rule

A journey-level setting that defines how often each individual can enter that journey over a specified time window.
Ø=Ý' Example Settings : Setting
Example Limit 1 entry
Time Period per 7 days
Action Reject or Delay new entries
“A person can only enter this journey once every 7 days .”

Categories: AJO, [New Term Dropzone]

FuzzyWuzzy library

for matching strings, adobe recommmended.

Categories: [New Term Dropzone]

G

GDPR

GDPR (General Data Protection Regulation) is a comprehensive data privacy law enforced by the European Union that governs how organisations collect, store, process, and share personal data of individuals in the EU. It emphasises user consent, data transparency, and the right to access or delete one's data. Example : Under GDPR, a company must obtain explicit consent before using someone's email for marketing. If the user withdraws consent, the company is obligated to stop processing and remove that data upon request.

Categories: Data Governance

Golden Profiles

CJA creates what we call 'golden profiles.' These profiles combine physical and digital data from various sources. '(What's "Golden" About It? ' Deduplicated : Combines IDs across devices and channels ' Unified : Merges data from CRM, POS, web, mobile, etc. ' Real-time : Continuously updated with new events and traits ' Trusted : Used for targeting, personalisation, and analytics — confidently ' Governed : Data usage policies (DULE, GDPR) respected

Categories: AJO, CJA

Guardrails

Adobe Experience Platform uses three tiers of compute resources to evaluate data and power segmentation, activations, and journeys. Each tier varies in performance and operational constraints ("guardrails") : 1. Edge (Fastest, Most Constrained) Runs in near real-time on Adobe Edge nodes. Used for instant personalisation and decisions. #ñp Millisecond latency Ø=ÞÑ Strict guardrails (e.g. no complex joins, limited segment logic) Ø>Ýà Used in AJO, Web SDK, Target Edge is for : "This field equals this value" Fast, atomic checks like :

```
country == "UK"
```



```
segmentMembership == true
```

```
profile.loyaltyStatus == "Gold"
```

It just doesn't have the puff to do any more! 2. Streaming (Balanced) Processes data as it arrives in the system. & Real-time to seconds latency Ø=Ý Powers streaming segmentation and AJO triggers Ø=Ý' Medium guardrails (some logic supported) ' Extra Capabilities in Streaming (vs. Edge) : Event-based logic !' e.g.,

```
eventType == "purchase"
```

AND

```
orderValue > 100
```

Time window filters !' e.g., "Occurred within last 7 days" Multiple event conditions !' e.g., "Viewed Product A AND added to cart" Event count rules !' e.g., "More than 3 purchases this month" AND / OR / nested conditions !' Complex segmentation logic with logical groupings Cross-field comparisons !' e.g.,

```
cartValue > profile.loyaltyThreshold
```

(limited, but possible) Exclusion logic !' e.g., "Did not visit support page in past 30 days" Profile + event mix rules !' Combine profile fields with event filters in a single segment 3. Batch (Most Relaxed) Runs on a scheduled daily basis in the data lake. Ø=ÝP High latency (up to 24 hours) ' Full XDM support, complex joins, no real-time requirement Ø=Üæ Best for large, complex datasets and segments

Categories: AEP, [New Term Dropzone]

H

Haptics

Vibration alerts on smartphone or Smartwatch

Categories: EP

Healthcare Shield

HIPAA stands for the Health Insurance Portability and Accountability Act — a U.S. law that sets national standards for the protection of patients' health information (PHI). Any system handling PHI must meet strict privacy, security, and breach notification requirements under HIPAA.

Categories: Data Governance

High-Frequency Triggering

High-Frequency Triggering means that events are triggered very often and individually, often in response to user actions — such as : Clicking a button
Opening an email
Viewing a page
Logging in
In the context of Adobe Journey Optimizer (AJO), it applies to unitary events, which are designed to handle rapid, real-time triggers on a per-event basis — not in batches. In short : High-frequency = happens often
Triggering = starts a journey or action
Together : system is built to respond many times per minute/hour/day as users interact
calls basically (or API weather events)

Categories: AEP, AJO

ho chi minh city (HCMC)

is the new name

Categories: Cities of the world (Demo purposes)



Identity Keys

In Adobe Experience Platform, identity keys are unique identifiers like

ECID

,

Email

,

Phone

, or

Loyalty ID

that link data across systems. These are stored in namespaces and used for identity stitching, profile merging, and privacy lookups. Profile attributes , on the other hand, are descriptive values such as

firstName

,

city

, or

loyaltyTier

. They help enrich a profile but do not participate in matching or resolution unless explicitly set as identities. To summarise : Identity Key Examples :

ECID

(Experience Cloud ID)

Email

Phone number

GAID

(Google Advertising ID)

IDFA

(Apple Identifier for Advertisers)

TNTID

(Adobe Target ID)

CRM ID

Loyalty ID

Subscriber ID

Login Username

Web Account ID

Device ID

Declared ID

(custom) 'L Profile Attribute Examples :

firstName

,

lastName

gender

,

age

,

dateOfBirth

city

,

region

,

country

loyaltyTier

,

membershipLevel

preferredLanguage

,

accountStatus

lastPurchaseDate

,

totalSpend

optInStatus

,

lastLoginDate

Identity keys define who the person is , while attributes describe what we know about them .

Categories: AEP, Exams, [New Term Dropzone]

Identity Map

The `.identityMap` is a structured object in `.XDM` that holds all known identities (e.g., email, ECID, CRM ID) about a profile. It supports multi-namespace identity resolution , powering `.RTCDP` and `.CJA` stitching logic. Format :

json

Copy

Edit

```
"identityMap": {
  "email": [{ "id": "user@example.com", "authenticatedState":
"authenticated", "primary": true }],
  "ECID": [{ "id": "12345678901234567890123456789012345678" }]
}
```

UC : Enables stitching of cross-channel IDs into unified `.AEP` profiles . Fuels segmentation, activation, and analysis in `.RTCDP`, `.AJO`, `.CJA`. Required for real-time profile lookup and data deduplication .

Image:

[Image available online: 1746046949877-239904537.webp]

Categories: CJA

Inactive Users

`.Inactive Users` ≡ Deactivated users who still own components eg John Doe produced the Monday trading report, but he leaves before a successor is identified. What Is It? When a user is removed from Adobe CJA, their components remain but are marked as owned by an “Inactive User.” Use Case If no one takes ownership after a user leaves, their metrics, filters, and dashboards remain in place but can’t be edited or reassigned without admin action. Why It Matters Unmanaged inactive users lead to orphaned components and governance risk. Use `.Transfer Assets` to resolve. We never had this in AA ;)

Categories: CJA

Ingestion Errors

Ingestion errors in `.Adobe Experience Platform` refer to failures that occur when data is brought into the system via batch or streaming methods. These errors are flagged by validation services like `.DCVS` (Data Validation Control Service) or surfaced as `.INGEST` errors in API responses. They indicate issues such as schema mismatches, missing required fields, incorrect data types, or malformed payloads, preventing the data from reaching the `.Data Lake`. Proper handling of ingestion errors is critical for ensuring data quality, enabling accurate profile

stitching, segmentation, and downstream activation across .0RTCDP.0, .0CJA.0, and .0AJO.0. .0
DCVS.0 Ingestion Errors (Data Validation Control Service)

DCVS-1101

: Null value found where non-null expected

DCVS-1103

: Pattern mismatch (e.g., wrong currency format)

DCVS-1104

: Data type mismatch (e.g., number vs. string)

DCVS-1106

: Required field missing .0INGEST.0 Error Codes (Ingestion Layer)

INGEST-1211-400

: Parsing/conversion/validation failure

INGEST-1555-400

: Required field is null or missing

INGEST-500

: Internal ingestion service failure

INGEST-400

: Bad request – check payload

INGEST-403

: Forbidden – check API key or token

INGEST-409

: Conflict – duplicate batch ID

INGEST-413

: Payload too large – split the file .0Flow Service.0 Errors (Dataflow Execution)

1100-400

: Invalid request

1101-404

: Resource not found

1102-500

: Internal server error

1103-503

: Service unavailable

1104-504

: Gateway timeout

1401-400

: Limit/count param conflict

1403-400

: Missing If-Match header


1404-412

: Version conflict

1405-400

: Request body null or empty

Image:

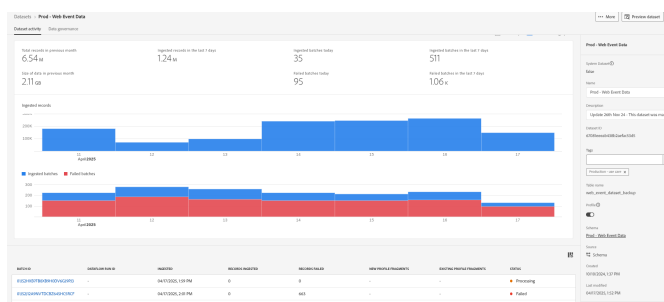

Categories: AEP

Insights and Personalization

These unified profiles allow you to mine insights. You can understand customer behavior, preferences, and pain points.

Categories: AJO

Invite

A request sent to a user or organization to join a project or data collaboration.

Categories: RT-CDP Collaboration

J


JO

Journey Optimiser aka AJO

Journey Canvas / Designer

Ø=Ý' What It Is Drag-and-drop UI in the AJO designer Controls logic, timing, branching, and activation Core of all real-time orchestration in .0AJO.0 Ø>Ýñ Components Start : triggered by .0unitary events.0, .0business events.0, or audience qualification Conditions : checks profile attributes, segment membership, event payload Actions : sends email, push, update profile, call webhook, etc Waits : control timing between steps End : closes the journey path Ø=ÜÍ UC Real-time customer engagement (e.g., welcome flow) Lifecycle journeys (e.g., cart abandon, renewals) Multi-branch flows based on behavior or profile state

Image:

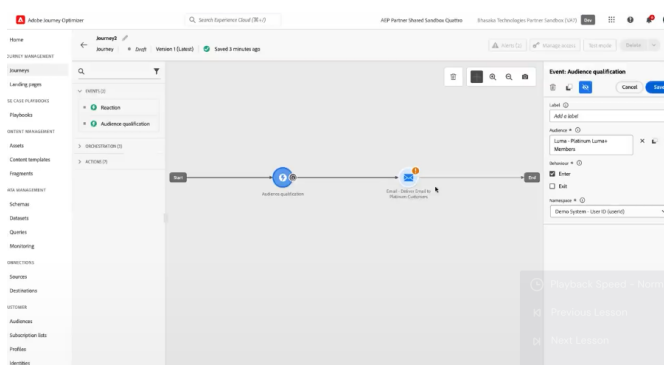

Categories: AJO

Journey Conditions

Conditions act as gates that control journey flow. If not met, the customer exits — no further steps occur. What Are Conditions? Conditions in Adobe Journey Optimizer (AJO) are logic checks placed after triggers or decision points. They evaluate data from the profile, event, or context to decide whether a person should proceed along the journey path. If the condition returns false, the person exits the journey at that point. Use Case : Consent Checking One of the most important uses of conditions is enforcing consent. For example, you can add a Condition node to check if

```
emailOptIn == true
```

If the person hasn't given consent, they are excluded from receiving messages — keeping your engagement respectful and compliant. Why They Matter Conditions prevent unwanted messages and bad experiences. Just like in Adobe Launch, if the condition fails, nothing happens — clean, predictable, and safe. They're essential for personalisation, compliance, and journey control.

Categories: AJO, [New Term Dropzone]

Journey Orchestration

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Journey Step

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

K

Konductor

Konductor is Adobe's internal name for the orchestration engine that powers the Unified Edge. It handles requests coming from Web SDK (Alloy.js) and coordinates services such as identity resolution, consent enforcement, decisioning, and data collection. Konductor runs on Adobe's global edge network infrastructure and is responsible for returning unified responses with minimal latency. Although not exposed as a product, the term appears in API endpoints, logs, and technical

documentation. Think of it as the brain guiding the infrastructure.

Categories: AEP, [New Term Dropzone]

L

Launch

The renamed Tag Management System (TMS) purchased from Search Discovery Satellite

Categories: ACS Data Collection

LaunchDarkly

Firewall Impact on Feature Flags Ø=ÞÑ Blocking

app.launchdarkly.com

can prevent visibility of new Adobe features What Is It? .0Adobe Experience Platform.0 and related tools use .0LaunchDarkly.0 to manage .0feature flags.0 — toggles that control visibility of new UI and backend features per user or org. Use Case : Controlled Rollouts Ø>Ýê Adobe gradually rolls out features using LaunchDarkly Ø=Ý Blocking

app.launchdarkly.com

prevents the flag from being evaluated Ø=Þ« This means features default to “off” , even if your org should have access Behavior Notes 'L Features may appear missing in CJA, AEP, or RTCDP Ø=Ý UI elements can change inconsistently if network policies fluctuate Ø>Ýé Experimental, beta, or sandbox features won't load Ø=Þà Can break parity between users across the same org Best Practice Ø=Üj ' Allow

app.launchdarkly.com

through your firewall (HTTPS port 443) ' Ensures consistent access to new and experimental Adobe features ' Reduces UI instability and support ticket overhead

Categories: AEP

Left Rail

In most Adobe Experience Cloud products (like Customer Journey Analytics, Adobe Analytics, RTCDP, and AEP), the left rail is the vertical navigation panel on the left side of the interface.

Categories: UX

Legacy Launch

The previous name for Adobe Experience Platform Data Collection before rebranding.

Categories: ACS Data Collection, CJA

Line Chart

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Litmus

Litmus Integration in Adobe Journey Optimizer
Preview email rendering across devices before sending
Test how your HTML emails look on real clients (e.g., Gmail, iPhone, Outlook)
What Is Litmus in AJO? Litmus is an email testing tool that lets marketers preview how their emails will render across dozens of clients and devices. Adobe Journey Optimizer (AJO) integrates with Litmus so you can test your email designs directly within the AJO email editor . This helps catch rendering issues early and ensures a consistent experience across inboxes.
Use Case : Visual QA Before Launch After designing an email in AJO, you can use the Litmus preview option to generate real screenshots of how it will look in, say, Apple Mail dark mode , Outlook desktop , or Gmail Android . This step is essential for teams that care about cross-device fidelity and want to catch rendering bugs before publishing.

Categories: AJO, [New Term Dropzone]

Lookback Window

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Lookup Dataset

A dataset that provides metadata that can be added to event or profile data. For example, a product lookup dataset might map product IDs to product names, categories, and descriptions. Replaces classifications , conceptually same. Lookup Datasets Ø=Ý Join external metadata to enrich .0event datasets.0 in .0Customer Journey Analytics (CJA).0 What Are Lookup Datasets? .0Lookup datasets.0 in .0CJA.0 are non-event, non-profile datasets used to enrich event data via foreign key joins. They do not contain timestamps or identities, but instead link on string or numeric fields (e.g.

product_id

,

store_id

,

campaign_code

). These datasets enable analysts to enhance their reports with external attributes, classifications, and contextual information without duplicating data across multiple systems. Lookups are configured within the CJA Connection Map . Use Case : Metadata Enrichment Across Domains Ø=Ý" Financial Metrics

product_id

!' COGS, profit margin %

store_id

!' operating cost, rent, staffing levels Enables derived metrics : margin = revenue - cost Ø<ß÷ Product Classification

sku_code

or

sku_id

!' product category, brand, style, season Used for rollups by category or brand in CJA workspaces Ø=ÜÍ Store & Location Context

store_id

(numeric) !' region, store format, manager name Allows store-level drilldowns or regional heatmaps Ø=Üã Campaign & Offer Mapping

campaign_id

or

offer_id

! channel, budget, discount %, conversion goal Enables attribution by enriched campaign traits Ø<ßâ B2B Entity Resolution

account_id

! industry, size, revenue segment

opportunity_id

! pipeline stage, assigned AE, projected value Supports lead-to-revenue and ABM reporting in .ORTCDP B2B Edition.0 Ø<ß• Loyalty & Personalization Layers

loyalty_tier

! tier name, associated benefits, UI color scheme

segment_id

! segment rule, scoring logic, audience type Ø>Ýê Testing & Experiments

test_id

or

variant_id

! experience name, test type, exposure group Enables controlled comparison of variants in reporting Ø<ß® App & Device Metadata

app_id

or

device_id

! platform, OS, screen size, manufacturer Important for cross-platform UX and crash analytics

Image:

[Image available online: 1746734787999-45667557.webp]

Categories: CJA

M

Match keys

Unique identifiers used to link records across datasets for integration and analysis.

Categories: RT-CDP Collaboration

Merchandising eVars

An Adobe merchandising eVar is a type of eVar (conversion variable) in Adobe Analytics that allows binding of values to specific products in the product string. It's used when you want to track attributes at the product level, like internal campaign ID, promo code, or product colour, and correlate them with revenue or units. Now called binding dimensions

Categories: AA (Adobe Analytics)

Merge Policy

A merge policy in Adobe Experience Platform defines how data from different sources is combined to create a single, unified customer profile. Since a person may interact with your brand via CRM, websites, mobile apps, or call centres, each system might have different or even conflicting values. The merge policy decides which source wins in those cases, ensuring your profile data is both accurate and reliable. Merge policies let you prioritise rules like “most recent update wins” or “prefer CRM over web data.” You can also decide whether certain datasets should be included or ignored during merging. For example, if a user has two different email addresses, the merge policy selects the one that should appear in the final profile — no more guessing. These policies are crucial for personalisation, segmentation, and journeys. If your journey uses outdated or incorrect data, the experience suffers. Adobe lets you apply specific merge policies per journey or segment, so you maintain both relevance and data integrity. Without proper merge policies, your campaigns can target the wrong person, at the wrong time, with the wrong message. Example Merge Policy Rules (with Examples) : Prefer Call Centre Phone Number Why? It's often verified by a live agent, so it's more reliable. Dataset A (CRM) :

```
phone = +44 7890 123456
```

Dataset B (Web form) :

```
phone = +44 7000 987654
```

Merge Policy Result : Use + 44 7890 123456 from CRM (Call Centre) Prefer Email from Privacy Policy Submission Why? User submitted it explicitly when giving marketing consent. Dataset A (Marketing Opt-in Form) :

```
email = alice@email.com
```

Dataset B (Old Purchase Data) :

```
email = alice.old@email.com
```

Ø>Ýà Merge Policy Result : !' Use alice@email.com from Privacy Form (consent-backed)
Ø=ÝÃp Prefer Most Recent Update for First Name Why? It reflects the user's latest details
(e.g., after marriage) Dataset A (Updated yesterday) :

```
firstName = Alice
```

Dataset B (3 months old) :

```
firstName = Alicia
```

Ø>Ýà Merge Policy Result : !' Use Alice

Categories: Data Governance

Metric

A quantitative measurement of key data points. In CJA, metrics allow you to view measurements, such as page views, visits, orders, or revenue.

Categories: CJA

midValues

midValues Dataset Ø>Ýp Processed Adobe Analytics event data ingested via .0AASC.0 into .0AEP.0 What Are midValues Datasets? A .0midValues.0 dataset is automatically generated by the .0Adobe Analytics Source Connector (AASC).0 when ingesting .0Adobe Analytics.0 data into .0Adobe Experience Platform (AEP).0. The dataset name is based on the report suite ID, suffixed with

```
_midValues
```

(e.g.

```
globalSuite_midValues
```

). It contains event-level data that has been fully processed according to .0AA.0 rules (e.g. processing rules, .0VISTA.0, marketing channel logic). Use Case : Customer Journey Analytics (CJA) These datasets serve as the event dataset in .0CJA.0 connections. They support stitched, deduplicated reporting using the .0mid.0 (Marketing Cloud Visitor ID) for identity resolution. Why It Matters Essential for any organization ingesting .0AA.0 data into .0AEP.0. The .0midValues.0 dataset ensures fidelity between Adobe Analytics UI and .0CJA.0 analysis, enabling accurate cross-channel reporting. Not manually uploaded — only created through .0AASC.0.

Categories: AA (Adobe Analytics), AEP, Data Governance

Missing Data

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Mixins

Now called field groups..... ;)

Categories: AEP

Modal

A dialog box that overlays the interface and requires user interaction.


Categories: UX

N

No value

Previously 'unspecified'

Image:

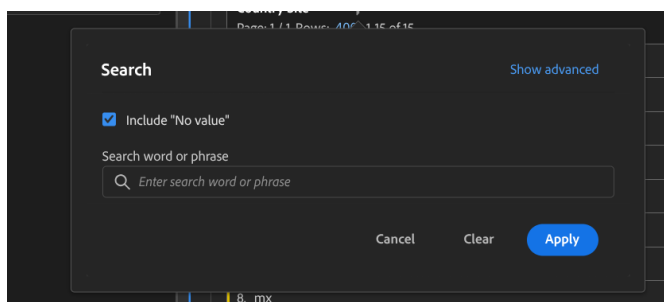

Categories: CJA

Non Stitch Merge Policy

A non-stitch merge policy is a special kind of merge policy in Adobe Experience Platform where identity stitching is disabled — meaning : Ø=Ý No identity graph is used to combine data across different identities. Ø=Üî What It Does Treats each identity (e.g. ECID, email, CRM ID) as a separate profile . Even if a customer has multiple identifiers across datasets, they won't be merged into a single profile. Segmentation, journeys, and reporting all happen per-identifier , not per-person. Ø>Ýê Use Cases ?

Categories: EP

Non-Event-Connected Profiles

Non-Event-Connected Profiles aka. “Profiles with no matching events” “Non-event-connected profiles” “Inactive profiles (event-less)” "Orphan Profiles" (the authors terminology) Ø=Ü{ Profiles ingested into .0CJA.0 that have no associated events and are therefore hidden from reporting What Is It? .0Non-event-connected profiles.0 are profile records (e.g. from CRM or offline datasets) that are successfully ingested into Customer Journey Analytics , but have no matching event data tied to their .0 Person ID.0. These profiles are stored in the system, but do not appear in Analysis Workspace until at least one event is stitched to them. Use Case : Data Join Visibility Ø>Ýp Ingest a CRM dataset with 500,000 rows Ø=ÜÉ Only 200,000 of those IDs match events in the web event dataset Ø=ÜAp Ø=Ýèp Only the event-connected 200,000 profiles are visible in Workspace — the rest are “non-event-connected”

Categories: CJA, Identity



Offer Decisioning

A capability that delivers the best offer and experience to your customers across all touchpoints at the right time.

Categories: CJA, UX

Offer Eligibility

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Offer Ranking

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Orchestration Flow

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Overlap

Common audience segments between datasets used to identify collaboration opportunities.

Categories: RT-CDP Collaboration

Overlap Analysis

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

P

Panel

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Parquet

Parquet and AEP's Data Architecture ÷=ÜÂ AEP stores data as Parquet files, not in relational databases ÷>Ýà Queries run over a flat, distributed data lake using schema-on-read ÷>Ýé What Is Parquet in AEP? Apache Parquet is a columnar file format optimised for analytical workloads. In Adobe Experience Platform, nearly all datasets — from AJO tracking to Real-Time Profile ingestion — are stored as Parquet files in a cloud data lake (S3 or Azure Blob). These files are compressed, column-based, and partitioned , making them efficient for reading large volumes of

data without scanning entire tables. Ø=Ü; How AEP Works with Parquet (vs. Relational)

Unlike traditional relational databases where data is stored in structured tables with fixed schemas and indexes, AEP uses a schema-on-read approach . Each dataset follows an XDM schema , but the raw data lives as flat files (Parquet). When you run a query, Trino dynamically interprets the schema, scans the relevant partitions, and returns the result — all without loading the data into a database engine. There are no joins via foreign keys , and data is append-only in most cases. Ø=Ý Why This Matters This architecture gives AEP massive scalability and flexibility, but it's also why Query Service can feel slower than traditional databases. You're querying distributed Parquet files across a cloud data lake, not a local, indexed RDBMS. Knowing this helps you design better queries : always filter by

timestamp

, minimise nested field use, and query only necessary columns. It's big data by design — and built for scale, not speed.

Categories: AEP, [New Term Dropzone]

Participation

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Participation Metric

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Pathing

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Permissions

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Persistence

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Person ID

The primary identifier used to stitch together customer data across datasets and channels. Often represents a user's ID, cookie ID, or email address.

Categories: CJA

Personalisation Attributes

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Personalization object

Personalization Object Enables dynamic data injection from .OCJA.0 or .ORTCDP.0 into .0 AJO.0 for advanced targeting and decisioning. Bridges analytic insight with real-time journey personalization. What Are Personalization Objects? A .0personalization object.0 is a structured data block used in .0Adobe Journey Optimizer.0 (.0AJO.0) to dynamically personalize content, conditions, and decisioning logic. It allows journeys to access enriched profile data, calculated attributes, and analytics output from .OCJA.0 or .ORTCDP.0 in real-time. Use Case : CJA !' AJO Personalization You run customer scoring or funnel analysis in .0Customer Journey Analytics.0 (.0CJA.0), then send the outcome (e.g. "high-value prospect") to .ORTCDP.0. Inside a journey, you use the .0personalization object.0 to check this attribute and tailor messaging or path selection accordingly.

Image:



Categories: AJO, [New Term Dropzone]

PII

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Pill


A rounded label used to display filters, tags, or categories.

Categories: UX

Polarity

eg upo is good, down is bad (orders) or complaints (bad)

Image:

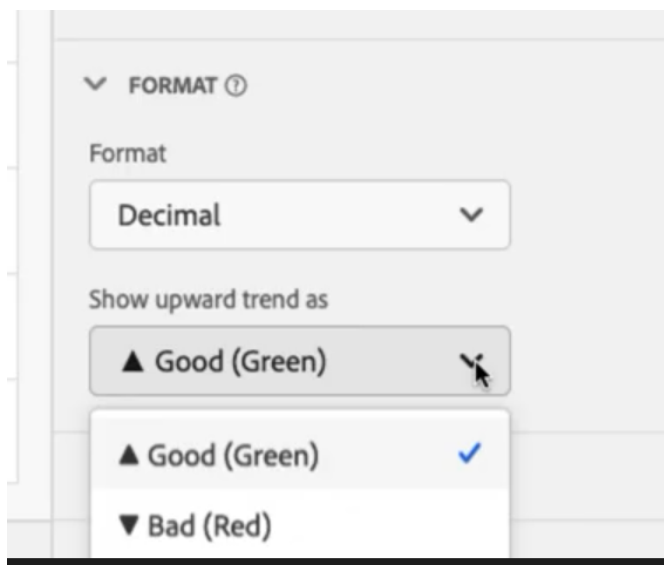

Categories: [New Term Dropzone]

Policy violation

A policy violation occurs when a user or system tries to use data in a way that violates a governance rule . This usually involves : Using ePHI or sensitive data for unauthorised purposes Violating data usage labels (e.g., using

C1

-labelled data for marketing) Breaking merge policies in segment or journey configuration

Categories: Data Governance

Popover

A floating panel used for contextual information or actions.

Categories: UX

Privacy Actions

IAB's standard U.S. Privacy String framework actions : ' Supported in AEP : access
– Retrieve all data associated with a user (Subject Access Request / SAR) delete
– Permanently delete all personal data for a user optout – Opt out of the sale of personal data (e.g. CCPA opt-out of sale) 'L Not Supported in AEP (as of now) :
anonymize – Obfuscate or scramble identity values (not supported natively)
update / replace – Modify or replace existing values (not a supported privacy action)
restrict – Temporarily restrict processing of personal data object – Object to a specific type of processing (e.g. profiling, marketing) portability – Request structured data for use in another system (partial overlap with access)

Categories: Data Governance, Exams

Privacy and Security Shield

Enhances data privacy and protection features, suitable for regulated industries (e.g. finance, government). It's in Limited Availability , meaning it's not generally available to all customers.

Categories: Data Governance

Product Profiles

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Profile Collapse / Collapse Profile

AEP concept for merging identities Ø>Ýé Profile collapse occurs when multiple identity fragments (e.g. email, device ID, CRM ID) are determined to belong to the same person and are merged into one unified customer profile . This process is governed by the identity graph and controlled by the merge policy . What Is Profile Collapse? In Adobe Experience Platform, users interact across many channels, generating disconnected identity fragments. Profile collapse refers to the process of linking and merging these fragments to form a single, holistic view of the customer . For example, a person may have a mobile app login, a web visit, and a CRM record — collapse brings these together. Use Case : Cross-Device Recognition When a user

logs into an app with their email, AEP links the device ID and email . Later, if the same email is used in a loyalty program, all data — from purchases to app events — is collapsed into a single, enriched profile . This allows for better personalisation and attribution. Why It Matters Profile collapse enables true 360° customer views , but comes with risk. If identity resolution is weak or merge policies are misconfigured, you may wrongly combine two individuals — leading to privacy violations and inaccurate targeting. That's why governance and merge logic are critical in profile stitching.

Categories: Data Governance

Profile Dataset

Contains data that applies to your persons, users, or customers in the Person ID dimension. For example, customer loyalty information, preferences, or demographic details.

Categories: CJA

Profile switch

can create immutable change, so this operation is one-shot this operation is one-

Image:

[Image available online: 1746734225730-645194432.webp]

Categories: AEP, Identity, [New Term Dropzone]

Project

A workspace for collaborating on data integration and segmentation tasks.

Categories: RT-CDP Collaboration

Project Debugging

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Proofs

AJO proofs let you test how emails look before launch, but they don't show how the email renders across different inboxes or devices. That's where Litmus comes in. Litmus enhances AJO's proofing by offering inbox previews , spam checks , link validation , and collaboration tools . While AJO doesn't natively integrate with

Litmus, you can still send proofs to Litmus seed addresses or paste the HTML. This helps catch design issues and boost email quality before sending.

Categories: AJO, [New Term Dropzone]

Pseudonymous profiles

Definition : .0Pseudonymous profiles.0 are profiles that contain only identifiers from customer-specified pseudonymous or unknown identity namespaces (e.g.,

ECID

,

GAID

,

AAID

) and lack any known identifiers like email or CRM ID. Expiration Criteria : No activity (such as Experience Events or profile attribute updates) within a user-defined time frame. Activity is defined as any Experience Events being ingested or customer-initiated updates to the profile attributes. Configuration : Set at the sandbox level via the Profile dashboard under Settings. Specify the number of days for expiration and the identity namespaces to consider. For production sandboxes, the default expiration is 14 days (minimum 1 day, maximum 365 days). Impact : Once the specified period of inactivity is reached, the profile and its associated event data are permanently removed from the Profile store. This deletion does not affect the data lake or the Identity graph. This feature helps maintain data hygiene and ensures that stale or inactive .0pseudonymous profiles.0 do not consume resources unnecessarily.

Image:

[Image available online: 1746044741307-179521809.webp]

Categories: AEP

PTR Records

PTR Records (AJO) Ø>Ýà DNS + Deliverability Configuration Ø=Ý Reverse DNS entries that map Adobe's sending IPs to your domain Ø=Üì Essential for email deliverability, helping ISPs verify your identity What Are PTR Records? PTR (Pointer) records link an IP address to a hostname, enabling reverse DNS lookups. In Adobe Journey Optimizer, PTR records are automatically configured when you delegate a subdomain in Admin %, Channels %, Email . Adobe then publishes a hostname (e.g.

r-42.news.example.com

) for each MTA IP it uses on your behalf. Use Case : Clean Delivery for Transactional Mail Say you dedicate an IP to order confirmations. When Gmail receives mail from that IP, it checks the PTR. If it matches your delegated domain and aligns with SPF and DKIM, the email is more likely to land in the inbox—not spam. Why They Matter Improves trust – ISPs often reject or flag mail without valid PTRs. Strengthens authentication – Works alongside SPF, DKIM, and DMARC. Centralises config – All DNS-linked deliverability settings live in one admin section.

Categories: AJO

Public audience

An audience discoverable by collaborators within a project, as opposed to private or custom audiences.

Categories: RT-CDP Collaboration

Publisher

An operator of online content where personal data is collected with consent for advertising or measurement.

Categories: RT-CDP Collaboration



Query Service Notebooks

Interactive environment for querying and visualizing data using SQL within Adobe Experience Platform.

Categories: AA (Adobe Analytics), CJA

Quick Actions


Mini-buttons surfaced directly in tables or cards.

Categories: UX

Quick Segments

Quick Segments — Highlights Created in-line from a table/panel (no need to open Segment Builder) Originally supported Event-level logic (can't switch to Person or Session level), but now expanded to all 3 scopes in both AA and CJA. & p Temporary by default unless saved Great for on-the-fly filtering during exploratory analysis Can be promoted to full segment by clicking “Open builder” UC : Filter orders by device type, country, or campaign in a few clicks without breaking flow.

Image:

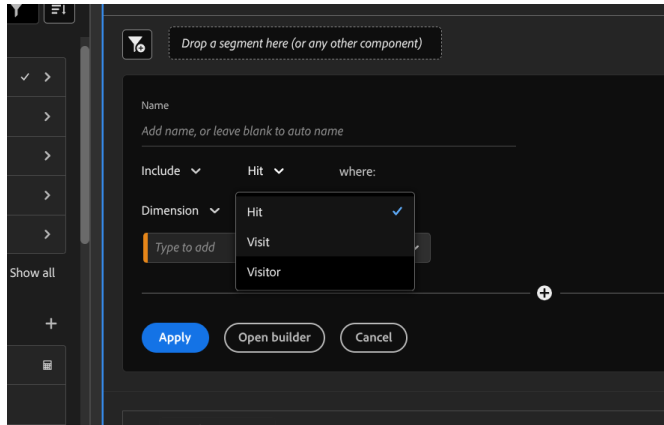

Categories: AA (Adobe Analytics), CJA

R

Rail

Fixed panel on the side of the screen, used for navigation or filters.

Categories: UX

Re-ingest

Reingestion into CJA Ø=Ý Manually triggering dataset reprocessing into .0Customer Journey Analytics (CJA).0 What Is Reingestion? Reingestion refers to manually reimporting datasets from .0Adobe Experience Platform (AEP).0 into .0CJA.0. This is often required after schema updates, data corrections, or identity mapping changes to ensure CJA reflects the most current and accurate data. Use Case : Data Corrections & Schema Updates Common reasons include : Schema field changes or identity namespace updates Backfilling or correcting event data Fixes to ingestion logic or calculated metrics Improved identity stitching requiring fresh joins Activation of datasets that were previously not connected to .0CJA.0

Categories: CJA

Real-time Event

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Response Tracking

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Retention Analysis

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Rolling Calculations

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Rule Sandwich

the rule sandwich title (On a Tool Square (Ever)) to as "the rule sandwich

Core - Window Loaded

Ø>ÝI Filling (Condition) : Your custom condition (e.g.,

Sandwich filling --- the mat...

) Ø<β^ Bottom Slice (Actions) : Custom Code followed by


Send Event

via AEP Web SDK ØÝà Purpose of the "Rule Sandwich" This pattern is used to : Fire logic only under specific conditions Prepare or log data in Custom Code Send it downstream to Adobe Experience Platform with

```
alloy("sendEvent", {...})
```

Context ; 'It must be in a rule sandwich to work, cannot be in onBeforeEventSend (it wont work tehre'

Image:

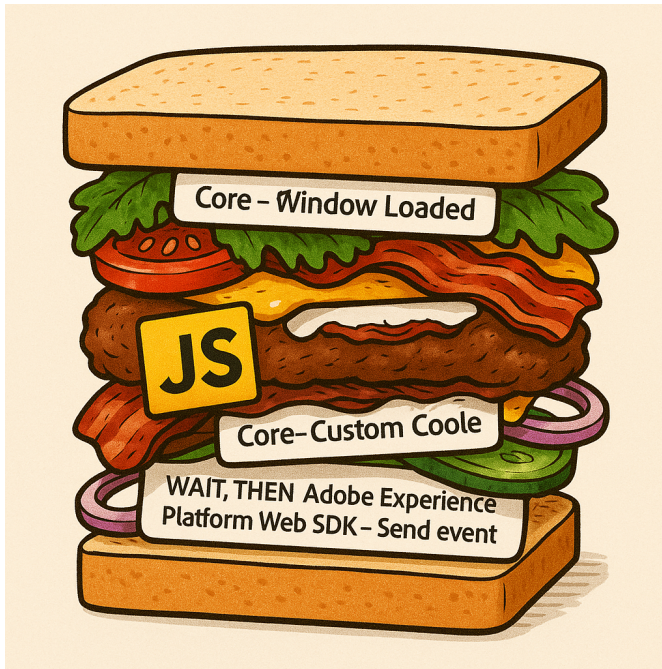

Categories: Fun, TMS, [New Term Dropzone]

S

saigon

this is the text for saigon

Image:



Categories: Cities of the world (Demo purposes)

Sandbox

which partition a single Platform instance into separate virtual environments to help develop and evolve digital experience applications. You can think of sandboxes as “data silos” that contain datasets. Sandboxes are used to Deleting a sandbox can be very bad, expect to type in 'DELETE' Manually type in

Categories: [New Term Dropzone]

Scatter Plot

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Scheduled Projects

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Schema

The structure and definition of a dataset. It outlines the fields, their types, and how they relate to each other.

Categories: CJA

Schema Field Types

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Seed List

Seed List Ø=Üä Internal test recipients added to live sends Ø>Ýê Used to monitor real-world message delivery and rendering What Are Seed Lists? A seed list in Adobe Journey Optimizer is a predefined group of internal users or test recipients who receive a live copy of a campaign message. Unlike previews or test mode, seed lists are sent the actual message at the same time as real users, bypassing normal journey or audience qualification. Use Case : Internal QA Before Launch Brands often use seed lists to send final versions of messages to marketers, QA teams, or

legal departments. This allows real inbox monitoring of subject lines, formatting, images, and personalisation fields before or during a rollout. Why They Matter Seed lists provide a final safety net for live journeys. They help catch rendering or dynamic content issues, confirm deliverability, and give stakeholders confidence in message quality. In AJO, seed lists are managed under Admin settings and applied at the message level. Each seed list can include up to 10 recipients max , keeping its use focused and controlled.

Categories: AJO

Segment

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Segment Evaluation Timing

When a segment is created for streaming or edge evaluation in Adobe Experience Platform, qualifying profiles will not be added instantly. Adobe guarantees inclusion within the next 24 hours . Streaming and edge segments are designed for near real-time responsiveness, but not all profiles qualify the moment the segment is saved. This is because profiles are evaluated as new data flows into the system, and Adobe allows time for processing across regions and services. As a best practice, segment-driven activations or journeys should be designed with this latency in mind. Avoid triggering downstream actions under the assumption that all eligible profiles will be present immediately after segment creation. If it is new, it takes time to sort itself out.

Categories: AEP

Segment Qualification

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Segmentation Service

A core service in Adobe Experience Platform that creates and evaluates audiences in real-time or batch mode based on profile attributes and event data. It powers use cases in AJO, RTCDP, and CJA.

Categories: AEP

Sequential Segment

Used when you need to segment users based on a defined order of events . In this case, the user : Viewed a laptop Added it to cart Viewed accessories Did not proceed to checkout The order of actions matters—making it ideal for Sequential logic in AEP segmentation.

Categories: AEP, Exams

Server-to-Server API (Edge Ingestion)

Server-to-Server API (Edge Ingestion)

Categories: [New Term Dropzone]

Session

A group of customer interactions within a given timeframe. In CJA, session definitions are customizable, allowing you to determine when a session starts and ends based on your business needs.

Categories: CJA

Shared Filters

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Shared Metrics & Dimensions manager

What Is Shared Metrics & Dimensions Manager? Central hub for managing reusable metrics and dimensions across data views The Shared Metrics & Dimensions Manager is the UI in Customer Journey Analytics that allows you to create, import, deduplicate, and centrally manage metrics and dimensions that are shared across multiple data views within a single connection. It enables governance, consistency, and efficiency for organizations operating multiple data views that rely on common business logic. Components created or imported here are automatically synchronized across all data views they are shared to. Changes to a shared component instantly propagate across all linked views. Use Case : Normalizing KPIs Across Multiple Data Views An enterprise might track revenue across 15 business units, each with its own data view. By importing each unit's revenue metric into the Shared Metrics & Dimensions Manager, reviewing for consistency, and merging them into one shared "Revenue" metric, the organization ensures a single source of truth that is automatically used across all workspaces

— with zero duplication or rework. Why It Matters

- Central governance : Control critical metrics and dimensions in one place
- Deduplication : Merge duplicates based on component ID and settings
- Data quality : Prevent divergence in definitions across teams
- Scalability : Reduce analyst workload when updating component logic

Functional Highlights

- Import : Brings in components from existing data views for sharing and deduplication
- Create new : Define fresh shared components directly in the interface
- Merge review : Automatically identify components with same ID and identical logic
- Conflict resolution : Choose a “source of truth” for matching IDs with differing logic
- Share/Unshare : Control visibility of components across data views
- Edit in bulk : Shift-click edit shared settings across multiple components
- Track history : Review import and edit logs via Job History

Use Case : Maintaining Consistency After Schema Evolution

As schemas evolve (e.g., renaming fields or changing attribution logic), teams risk using outdated metrics. With shared components, updates to logic (such as adjusted attribution models or new persistence settings) are made once in the manager and instantly applied across all dependent data views — avoiding errors from stale or mismatched definitions.

Use Case : Enabling Governance for Decentralized Analytics Teams

In large organizations with many analysts working across different brands or markets, the shared manager allows a central data governance team to publish approved metrics and dimensions , ensuring local teams work only with vetted, policy-compliant components — while still enabling self-service exploration within defined boundaries.

Image:

[Image available online: 1746819667331-544236029.webp]

Categories: CJA

SideNav

Vertical left-hand navigation panel (left rail).

Categories: UX

Simulate

Simulate a journey in AJO

Categories: AJO, [New Term Dropzone]

Sketches

Simplified audience data summaries enabling overlap analysis without sharing personal data.

Categories: RT-CDP Collaboration

Slider

Allows users to make selections from a range of values.

Categories: UX

Standard Lookups

Also known as Adobe Supplied Lookups Standard Lookups (Adobe-supplied Lookups) Built-in reference data for key fields Auto-enrich values like browser ID, OS, country What Are Standard Lookups? Standard lookups, also called Adobe-supplied lookups, are lookup datasets preconfigured by Adobe within Customer Journey Analytics (CJA). They automatically enrich common fields by translating cryptic IDs into readable labels (e.g.,

```
device.browser = 2
```

```
!
```

```
"Chrome"
```

```
). Use Case : Auto Browser Labeling Your event dataset includes
```

```
device.browser = 5
```

```
. Thanks to Adobe's standard lookup, this resolves to
```

```
"Firefox"
```

in CJA Workspace without needing any manual configuration. Why They Matter Simplify reporting without extra data prep Enhance readability of standard field groups Reduce the need for custom lookup datasets Seamlessly applied across compatible schemas Not editable or visible as datasets Overridden if a manual lookup is added for the same field path

Categories: [New Term Dropzone]

Standard Namespaces

Correct standard namespaces for browsing profiles in AEP include : GAID (Google Advertising ID) Phone TNTID (Adobe Target ID) Declared ID is a common namespace, but it's not directly browsable in the profile UI . It's typically used for identity stitching via ingestion, not for direct lookups. Similarly, Address isn't a namespace at all — it's a profile attribute. When using the Profile Viewer in AEP, only specific standard namespaces are enabled for profile lookup, and these vary slightly based on license and setup. The key is : browseable all available. Each identity in AEP must be associated with a namespace to participate in profile stitching, segment qualification, or personalisation. Adobe provides both standard

namespaces (like

Email

,

GAID

,

ECID

,

TNTID

) and allows for the creation of custom namespaces (like

CRM ID

,

Declared ID

,

Loyalty ID

). Namespaces power the Identity Graph by letting AEP know which identities belong to the same person. For example, if a profile has both

ECID: abc123

and

Email: jsmith@example.com

, the namespace tells AEP these are different types of IDs — and can be stitched together if linked by data ingestion.

Categories: AEP, Exams

Stepper

UI pattern used to navigate multi-step processes like wizards.

Categories: UX

Streaming Data

Data that is continuously generated and sent in small packets. In CJA, streaming data allows for real-time or near-real-time analysis as data flows into the system.

Categories: CJA

Streaming Data Readiness

Streaming Segments : #ñp Ready immediately after creation ' New streaming data (from Web SDK/API) is evaluated in real time Ø>Ýà Evaluated centrally in AEP core, not at the edge Edge Segments : #ñp Take ~1 hour to propagate Ø<ß Need to sync across Adobe's global Edge Network Ø=Ý Subject to stricter guardrails due to limited compute and storage So yes, streaming segments are ready and active faster , but edge segments are what you need for ultra-low latency use cases on-device or near-device , like personalising a webpage or a mobile push in under a second.

Categories: AEP, Exams

Success Event

Actions that users take on your site that you want to track. These could include purchases, downloads, form completions, or other key conversion points.

Categories: CJA

Summary Data

Summary Data = So CJA Reporting Interface can crank out an answer, quick. .0 Summary Data.0 is pre-aggregated metric data stored daily for each .0Data View.0 in CJA. It is used to accelerate high-level queries — especially for totals, time trends, and dashboards — without needing to scan all raw event data. Ø>Ýà How It Works Adobe precomputes aggregates (e.g., total orders, revenue, visits) for each metric , per time granularity (day, week, month). These aggregates are stored separately from the raw event data. Workspace and BI queries (via the BI extension) automatically use Summary Data when applicable — e.g., when : No breakdowns/ dimensions are used The metric is natively supported (e.g.,

Revenue

,

Visits

) The date range aligns with the summary grain & Why It Matters FeatureBenefit Performance Faster dashboard loads Scalability Reduces pressure on full data scans Consistency Matches raw data calculations exactly (no sampling) Ø=Þ« Limitations Only applies to standard metrics (not derived or calculated ones) Only available when breakdowns are minimal or absent Not used in complex freeform tables (e.g., with nested breakdowns or segments) ' Use Cases Executive dashboards KPI scorecards Email/exported summaries Any chart showing total trends over time

Categories: CJA

Supported AJO Vendors

Channel Type Supported / Common Vendors Email Adobe ESP (native) SMS Sinch, Twilio, Infobip, MessageBird, Vonage, SAP Digital Interconnect Push Firebase (FCM), Apple Push Notification Service (APNS) via SDK WhatsApp Infobip, Twilio, Sinch (via API) Webhooks Any custom system via REST (internal or external APIs)

Categories: AJO

Suppression List

' What That Means : It applies regardless of the journey or campaign Once listed, a profile will not receive messages via that channel (e.g., email) Useful for : Regulatory compliance (e.g. GDPR opt-out) Manual overrides (e.g. internal test users) Persistent unsubscribes or bounces You can think of it as channel-level suppression at the platform level , not just journey-level logic

Image:

[Image available online: 1746048572633-22982695.webp]

Categories: AJO

T

Table

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Tabs

Organizes content into multiple views with a tabbed interface.

Categories: UX

Tag

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Tag Field

Input field where typed items turn into tags or tokens.

Categories: UX

Temporary contextual data

test

Categories: AEP

Tenant ID

In Adobe Experience Platform, the Tenant ID is a unique namespace assigned to an organisation. It prefixes all custom fields and objects in XDM schemas to avoid naming collisions with Adobe-managed fields or other tenants. It is auto-generated and ensures global uniqueness of custom schema components.

Categories: AEP

Test Profiles

An AJO Test Profile is a designated profile in Adobe Journey Optimizer used to simulate and validate journeys before they go live. It allows users to preview journey logic, event triggering, and message delivery (e.g., email or push) without impacting actual customer data. Test profiles are typically created with a known

identifier (like email or user ID) and are used in test mode to verify actions, conditions, and orchestration logic in a safe environment.

Categories: AJO

Time Constraints

No definition provided. This term needs a definition.

Categories: AJO, [New Term Dropzone]

Time Parting

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Time Zone Configuration

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Toast

Temporary message for notifications or confirmations.

Categories: UX

Touchpoint

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Transfer assets

.0Leaver Management & Role Changes.0 Ø=Ý Ensures continuity when users exit or change responsibilities eg John Smith produces the Monday Mornign tardingf report, but moves to finance and Mary Steel takes over. What Is It? .0Leaver Management & Role Changes.0 refers to the governance process of reviewing and reassigning ownership of analytics components when users leave the organization or move to new roles. Use Case When a user who owns filters, metrics, or dashboards exits, admins use .0Transfer Assets.0 to delegate their components to active team members — avoiding data loss or broken workflows. Also useful when

upgrading from AA

Image:

[Image available online: 1746820084179-553440672.webp]

Categories: CJA

Transient ID

Transient ID $\emptyset = \text{Yup}$ Temporary identifier used for anonymous users before a persistent .0 Person ID.0 is known What Is It? A .0Transient ID.0 is a short-lived identifier generated by .0CJA Stitching.0 to group anonymous events together when no declared identity (like email or login ID) is available. It enables session continuity and interim identity tracking until a real .0Person ID.0 is seen. Use Case : Pre-Auth Identity Handling $\emptyset = \text{Üñ}$ A user visits your site without logging in — ECID is captured, but no .0Person ID.0 $\emptyset > \text{Ýõ}$ Transient ID groups these ECID-based events as one visitor for temporary journey coherence $\emptyset = \text{Ý}$ Once the user logs in, events are restitched under the resolved .0Person ID.0 Behavior Notes & p Transient IDs are not surfaced in the UI or schema $\emptyset = \text{Ý}$ Automatically replaced when a declared ID becomes available $\emptyset > \text{Ýì}$ Used only for anonymous journeys in active sessions or stitching context $\emptyset > \text{Ýù}$ Does not persist beyond the identity resolution window Best Practice $\emptyset = \text{Üì}$ ' Ensure ECID is reliably captured for transient grouping to work ' Do not rely on Transient ID for reporting or segmentation — it's internal ' Use .0Person ID.0 to trigger replay and eliminate reliance on transient logic

Categories: Identity

TreeView

Expandable nested list (used in schema, data views).

Categories: UX

U

Unexpected Metric

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Unified Profile

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Unitary Event

Unitary events are a key AJO concept. Event Types in Adobe Journey Optimizer (AJO) & Unitary = real-time, person-level triggers $\emptyset$ Business = system-level triggers, indirect targeting >math>\emptyset</math> Unitary Events Unitary events are person-level, real-time triggers like clicks or purchases, using the XDM ExperienceEvent schema. There are two types : general (e.g., purchase) and profile-sourced (e.g., loyalty update). These events are captured via Web SDK, Edge Network, or API using the

/interact

endpoint. $\emptyset$ Business Events Business events are system-triggered and don't contain a person ID (e.g., product restock). They must be followed by a Read Segment step to find relevant users based on criteria like interest or location. $\emptyset$ AJO UX Behavior In the journey canvas, events are set on the right-hand rail . Choosing Business from the event type drop-down filters the schema list to only show non-person identity schemas like product or store ID. $\emptyset$ Why It Matters Unitary events are for direct, real-time journeys. Business events trigger broader logic and depend on segmentation. The AJO interface helps ensure the right schema is chosen for each type. $\emptyset$ Example Use Cases Unitary Events : A user adds a product to cart A form submission on a website Mobile app install Loyalty tier upgrade Business Events : Stock replenishment (e.g., notify all users that the PS5 is back in stock) Weather alert (e.g., rain forecast in a user's city) Weather-based promotion (e.g., if rain is forecast, notify users who viewed umbrellas) Flight delay notification Store reopening after a closure Event cancellation (e.g., notify fans when a concert is cancelled)

Categories: AJO, Exams

Unpopulated Fields

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Use case

A specific scenario that RT-CDP Collaboration can address, like audience discovery or campaign measurement.

Categories: RT-CDP Collaboration

V

Venn Diagram

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Visitor ID Service

Legacy term for the Adobe Experience Cloud Identity Service that manages cross-solution identity.


Categories: AA (Adobe Analytics)

W

Waffle

The nine-dot menu option at the top.

Image:

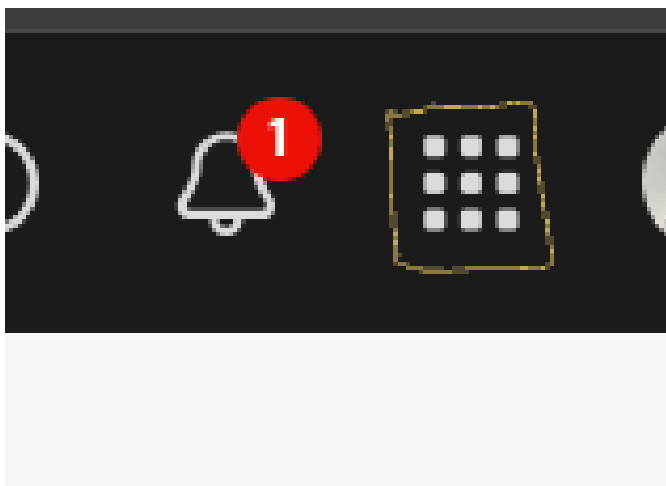

Categories: UX

Webhook

In the context of AJO Simulations , Ø>Ýà Why Use a Webhook in This Case? When email isn't fully configured in Adobe Journey Optimizer (e.g. no IP pool, no sender address, or no channel surface), using a Webhook action is a common workaround to : Simulate a journey response Validate journey flow logic Preview dynamic content / payloads Ensure the event triggers correctly ' Common Use Cases : Training/demo environments Early-stage sandbox setups Developer testing without needing deliverability config Debugging journeys without sending real emails or SMS

Categories: AJO, [New Term Dropzone]

Workspace

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

Workspace Project

A canvas in Analysis Workspace where you build analyses using data from your data views. Contains multiple panels and visualizations that help you make data-driven decisions.

Categories: CJA



XDM

No definition provided. This term needs a definition.

Categories: CJA, [New Term Dropzone]

[

[XDM Experience] Classes

In Adobe Experience Platform, a class defines the foundational structure and purpose of a dataset schema. It determines whether the data is a long-lived record (e.g.,

XDM Individual Profile

) or a time-based event (e.g.,

XDM ExperienceEvent

). Classes are part of the XDM specification and govern how data is used for profile stitching, segmentation, and activation.

Categories: [New Term Dropzone]

