



## 2.1.crazy\_nobel root@c87a13b55699



## 2.2

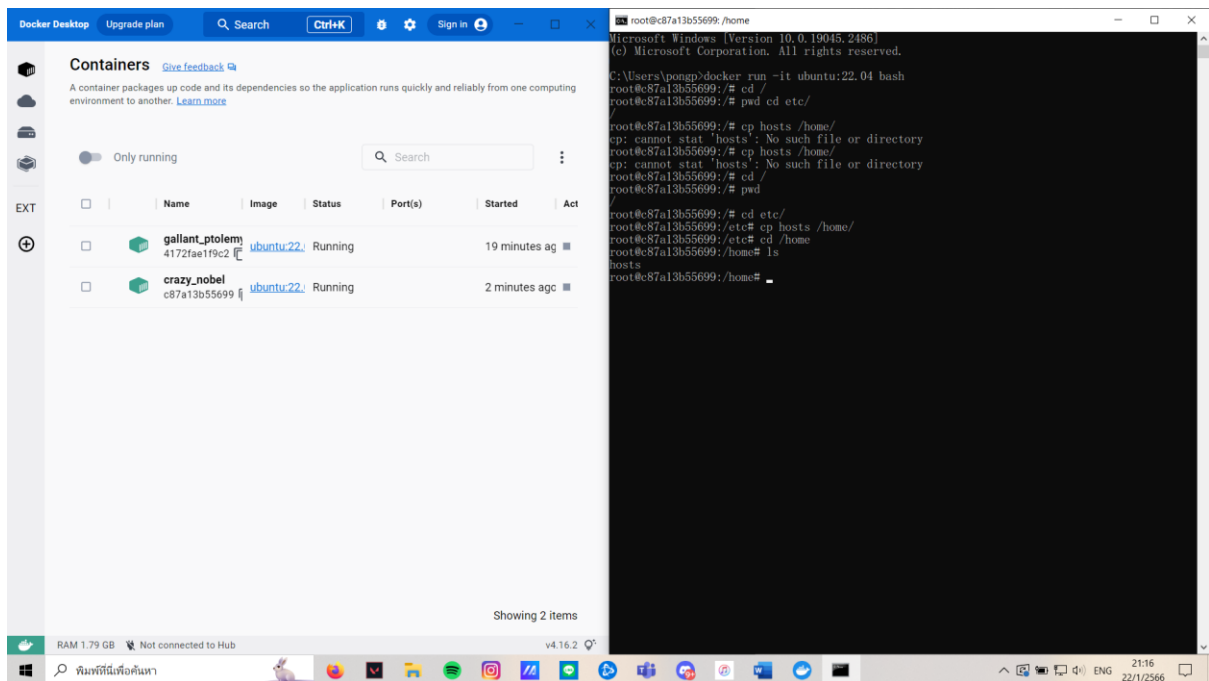

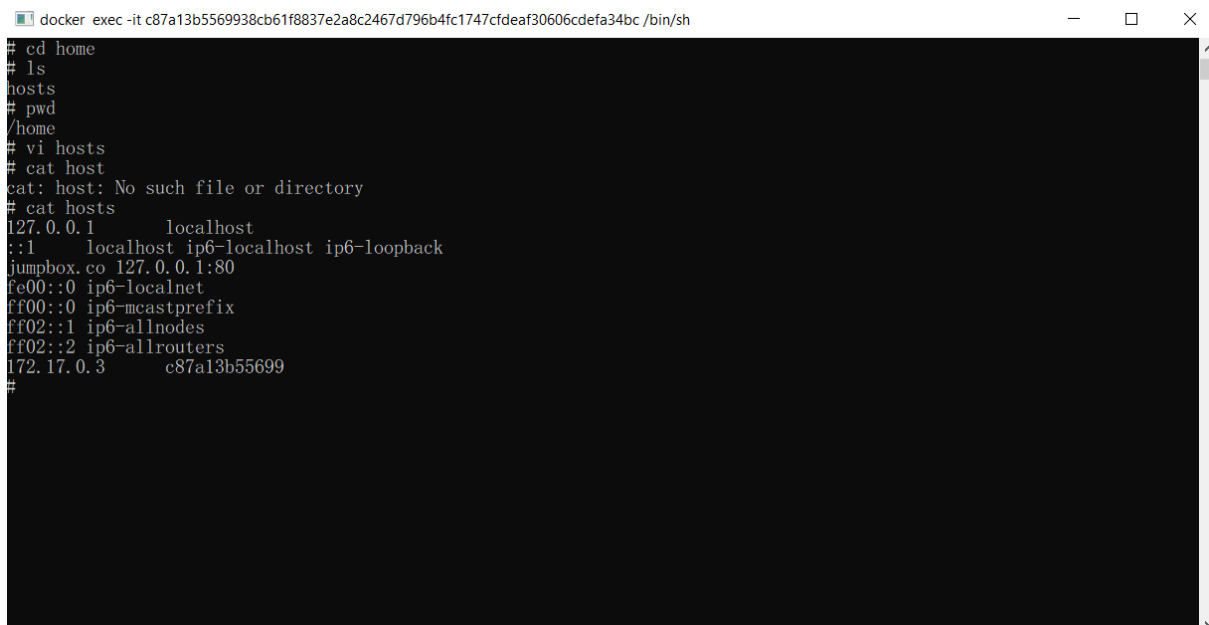

## 2.6

```
# cd /
# pwd
/
# ls
bin boot dev etc home lib lib32 lib64 libx32 media mnt opt proc root run sbin srv sys tmp usr var
# cd tmp
# touch test.txt
# ls
test.txt
#
```

## 2.7

```
# cd /
# cd home
# ls
hosts  jumpbox
# touch test
# ls
hosts  jumpbox  test
```

## 2.8

```
# cd /
# pwd
/
# ls
bin    dev    home   lib32  libx32  mnt    proc   run    srv    tmp    var
boot   etc    lib     lib64  media   opt     root   sbin   sys    usr
# cd tmp
# ls
test.txt
# pwd
/tmp
# rm test.txt
# ls
# ls
#
```

## 3

A

[illegible]



```
docker exec -it c87a13b5569938cb61f8837e2a8c246d796b4fc1747cdeaf30606cdefa34bc /bin/sh

-- ferris.rs
-- haskell.hs
-- haskell.hs
-- hello.java
-- node.js
-- world.go

0 directories, 7 files
# cd /
# ls
bin dev home lib lib64 media opt programing-language root sbin sys usr
boot etc jumpbox lib32 libx32 mnt proc programming-language run srv tmp var
# mkdir programming-way
# ls
bin dev home lib lib64 media opt programing-language programming-way run srv tmp var
boot etc jumpbox lib32 libx32 mnt proc programming-language root sbin sys usr
# cd programming-way
# ls
# mkdir functional
# mkdir imperative
# ls
functional imperative
# cd /
# tree programming-way
programming-way
-- functional
-- imperative

2 directories, 0 files
#
```