

# CSE-103: Computational Models

## Lecture Notes

Mann Malviya

Spring 2025


### Contents

|                                  |          |
|----------------------------------|----------|
| <b>Introduction</b>              | <b>2</b> |
| Textbooks . . . . .              | 2        |
| What is this Doc? . . . . .      | 2        |
| <b>Lecture 1</b>                 | <b>3</b> |
| Overview of the Course . . . . . | 3        |
| Learning Objectives . . . . .    | 3        |
| Outline of the Course . . . . .  | 3        |
| <b>Lecture 2</b>                 | <b>4</b> |
| What is Computation? . . . . .   | 4        |
| Input . . . . .                  | 4        |
| Output . . . . .                 | 5        |
| Procedure . . . . .              | 6        |
| Exercise Solutions . . . . .     | 6        |
| <b>Lecture 3</b>                 | <b>7</b> |

## Introduction

### Textbooks

1. Introduction to the Theory of Computation by Michael Sipser

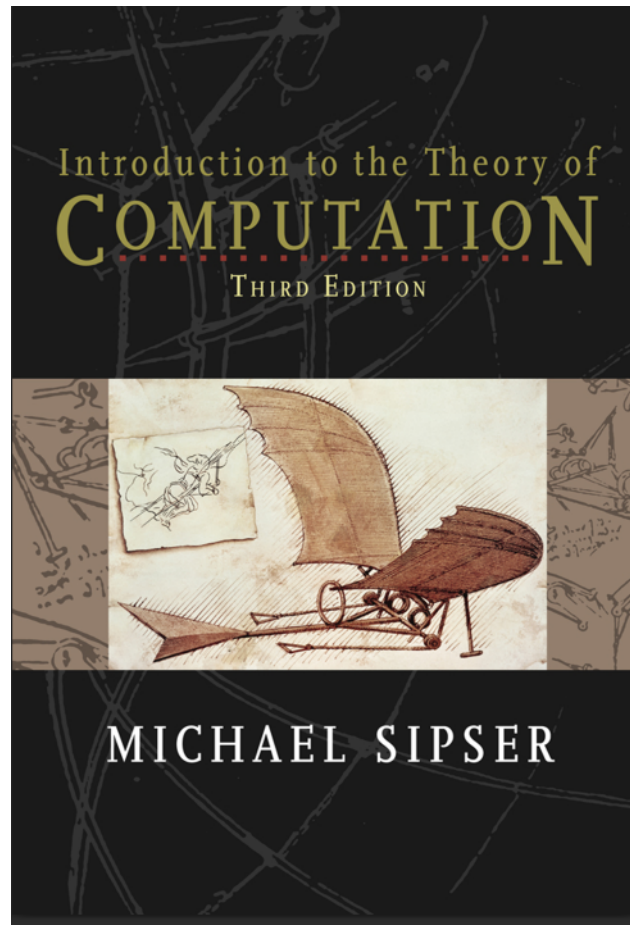

Introduction to the Theory of Computation  
by Michael Sipser

---

### What is this Doc?

This document shall contain my notes for the class CSE-103: Computational Models offered at UCSC, taught by Assistant Prof. Daniel Fremont. This document will contain notes from the lectures(possibly verbatim?) and may contain some additional information, either from the text or other sources that I find useful.

---

## Lecture 1

### Overview of the Course

- This course is called **Computational Models** what does that actually mean?
- SW

### Learning Objectives

After taking this course, you will be able to:

1. Interpret and design finite automata (DFAs and NFAs) and regular expressions.
2. Interpret and design context-free grammars (CFGs) and pushdown automata.
3. Prove basic properties of regular and context-free languages.
4. Interpret and design Turing machines(TMs).
5. Prove basic languages are decidable or Turing-recognizable.
6. Construct reductions between problems and apply such reductions to establish undecidability of problems
7. Construct polynomial-time algorithms/verifiers and polynomial-time reductions and use them to show languages are in P, NP, or are NP-complete.

### Outline of the Course

---

## Lecture 2:

We are building up to a simple model of computation: The Finite Automaton.

### What is Computation?

- A computation is some kind of procedure that takes some input and produces some output.

Input  $\longrightarrow$  Procedure  $\longrightarrow$  Output

A Computation

- We will talk about how we can model each of the 3 parts, the **input**, the **procedure**, and the **output**.

### Input

Input  $\longrightarrow$  Procedure  $\longrightarrow$  Output

- The input will always be a finite sequence of symbols, e.g. "001101" or "abca".

#### Definition:

The set of allowed symbols is called the **alphabet** (by analogy to natural language) and is denoted by  $\Sigma$ .

Example: The binary alphabet  $\{0, 1\}$

- The only thing we will assume about the **alphabet**  $\Sigma$  is that it's finite.

#### Definition:

A **string** or **word** over  $\Sigma$  is a finite sequence of symbols from  $\Sigma$ .

Example: 00, 101, 000 are words over the binary alphabet.

- These words/strings are going to be the inputs to the algorithms we will talk about in this class, one could imagine there are plenty of algorithms that operate on other kinds of input, like images, sounds, videos etc. but you can find ways of encoding them in binary. Then you can treat any arbitrary kind of input as being a finite sequence of 0's and 1's.
- If  $w$  is a string,  $|w|$  is the no. of symbols in  $w$ .

Example:  $|110| = 3$

- The empty string is denoted by  $\varepsilon$  and has a length zero i.e.,  $|\varepsilon| = 0$ .
- When given a string,  $w$  if you want to refer to an individual symbol within the string then you do so by  $w_i$ , for any  $i$  between 1 and  $|w|$  (i.e.,  $1 \leq i \leq |w|$ ),  $w_i$  is the  $i^{\text{th}}$  symbol of  $w$ . We are indexing starting from 1, this is just a convention.

Example:  $w = 110$  then  $w_1 = 1$ ,  $w_2 = 1$ ,  $w_3 = 0$ .

- Another very common operation we will need to use on strings is **concatenation** which is taking 2 strings and joining them together. We write concatenation as multiplication, so  $w = xy$  means  $w$  consists of the symbols of  $x$  followed by the symbols of  $y$ .

Example:  $x = 001$  and  $y = 10$  then  $xy = 00110$  and  $yx = 10001$ . Notice that concatenation is not commutative.

**Definition:**

For any non-negative ( $\geq 0$ ) integer  $k$ , i.e.,  $k \in \mathbb{Z}^+$ ,  $\Sigma^k$  is the set of all strings over  $\Sigma$  of length  $k$ .

Example:  $\{0, 1\}^2 =$  all length 2 binary strings  $= \{00, 01, 10, 11\}$

- We write  $\Sigma^{\leq k}$  for the set of strings over  $\Sigma$  of length  $\leq k$ .

Example: if  $\Sigma = \{0, 1\}$  then,

$$\begin{aligned}\Sigma^{\leq 2} &= \Sigma^0 \cup \Sigma^1 \cup \Sigma^2 \\ &= \{\epsilon\} \cup \{0, 1\} \cup \{00, 01, 10, 11\} \\ &= \{\epsilon, 0, 1, 00, 01, 10, 11\}\end{aligned}$$

Note: For any alphabet  $\Sigma$ ,  $\Sigma^0$  is the set of words of length zero, of which there is exactly one: the empty string  $\epsilon$ .

$$\Sigma^0 = \{\epsilon\} \neq \emptyset$$

- We write  $\Sigma^*$  (sigma-star) for the set of all strings of any length over  $\Sigma$ . Formally,

$$\Sigma^* = \bigcup_{k \geq 0} \Sigma^k$$

This is an infinite set.

Example:  $\{0, 1\}^* = \{\epsilon, 0, 1, 00, 01, 10, 11, 000, \dots\}$

This is going to suffice for us to talk about the input to our algorithms, because we will just assume some kind of standardized encoding of all other kinds of inputs into binary strings. The details of how we do the encoding will not be important at least in this class.

We will assume a standardized binary encoding of non-string datatypes, so that we can treat all inputs as binary strings. This shouldn't be too hard to believe because on real computers, everything is stored as 0 and 1's anyways.

### Exercise:

1. How many elements are in the set  $\{a, b, c\}^3$ ?
2. How many elements are in the set  $\{a\}^3$ ?

### Output



- We will make a somewhat restrictive assumption, we are only going to look at algorithms who's answer is YES/NO or TRUE/FALSE<sup>1</sup>. These are called **decision problems**. In these kinds of problems we are simply trying to say YES or NO, we are not going to deal with problems that need a string output.

**Definition:**

Problems for which every possible inputs output is either YES or NO are called **decision problems**.

<sup>1</sup>For the purposes of this class, it's sufficient for us to just deal with TRUE/FALSE questions, not too much interesting new stuff happens if you consider more complicated things, so we will not worry about that here.

Example: "Does a binary string contain an even number of 1's" is a Decision problem

011  $\rightarrow$  YES

0100  $\rightarrow$  NO

$\varepsilon \rightarrow$  YES

**Definition:**

To fully specify a decision problem, it's enough to identify the strings with answers "YES", this set is called the **language**<sup>2</sup> of the decision problem. A language  $\mathcal{L}$  over an alphabet  $\Sigma$  is a subset,  $\mathcal{L} \subseteq \Sigma^*$ .

**Procedure**

Input  $\rightarrow$  Procedure  $\rightarrow$  Output

**Exercise Solutions**

- 1.
  - 2.
- 

---

<sup>2</sup>because it's a set of words, an analogy from natural language

## Lecture 3: