

RESCUENET — PRODUCT WALKTHROUGH

Three real flows, end to end

Every screen below is an actual screenshot from the running app on a live AWS backend — no mockups. Each use case follows one report from submission through the agent pipeline to its outcome.


1 Happy path — stray report to shelter match

2 Automatic duplicate detection nearby

3 Lost pet matched to a found animal

Report a stray dog → shelter takes the case


One reporter, one photo, no account — the agents do the rest in seconds.

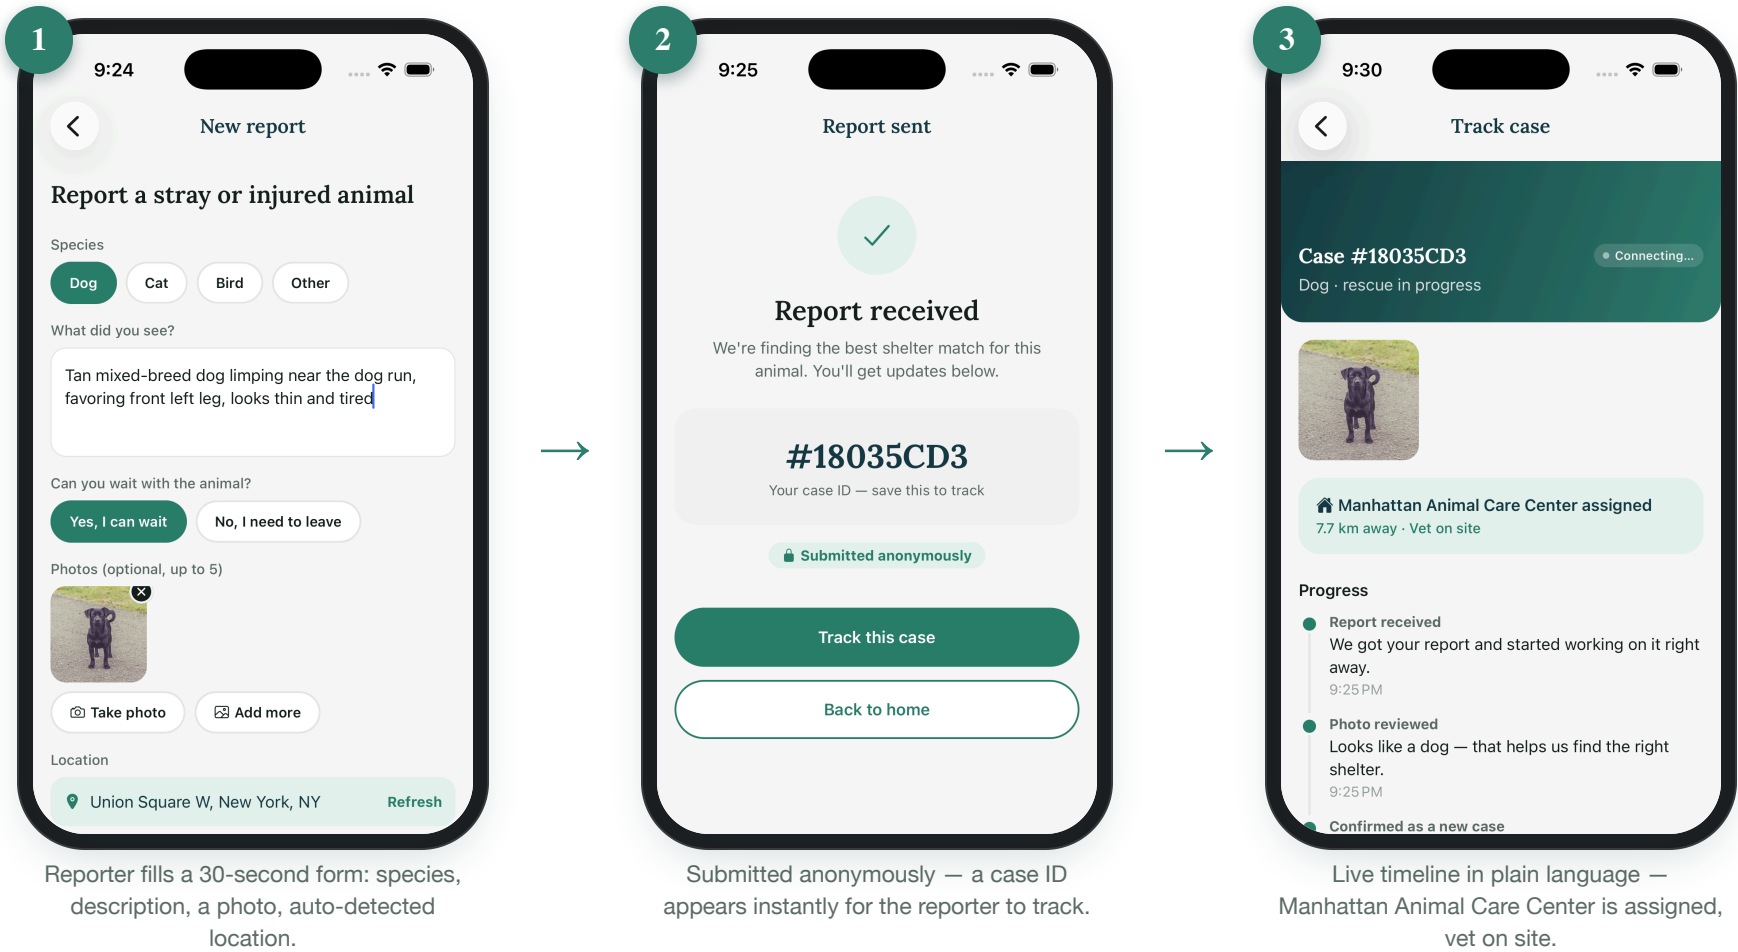

What this shows: From submit to a confirmed, vet-equipped shelter — driven entirely by vision (Rekognition), needs assessment (Bedrock), and arbitration agents, with the reporter watching it happen live.

Two nearby sightings, recognized as one animal


A second passerby reports the same dog a block over — the system notices on its own.

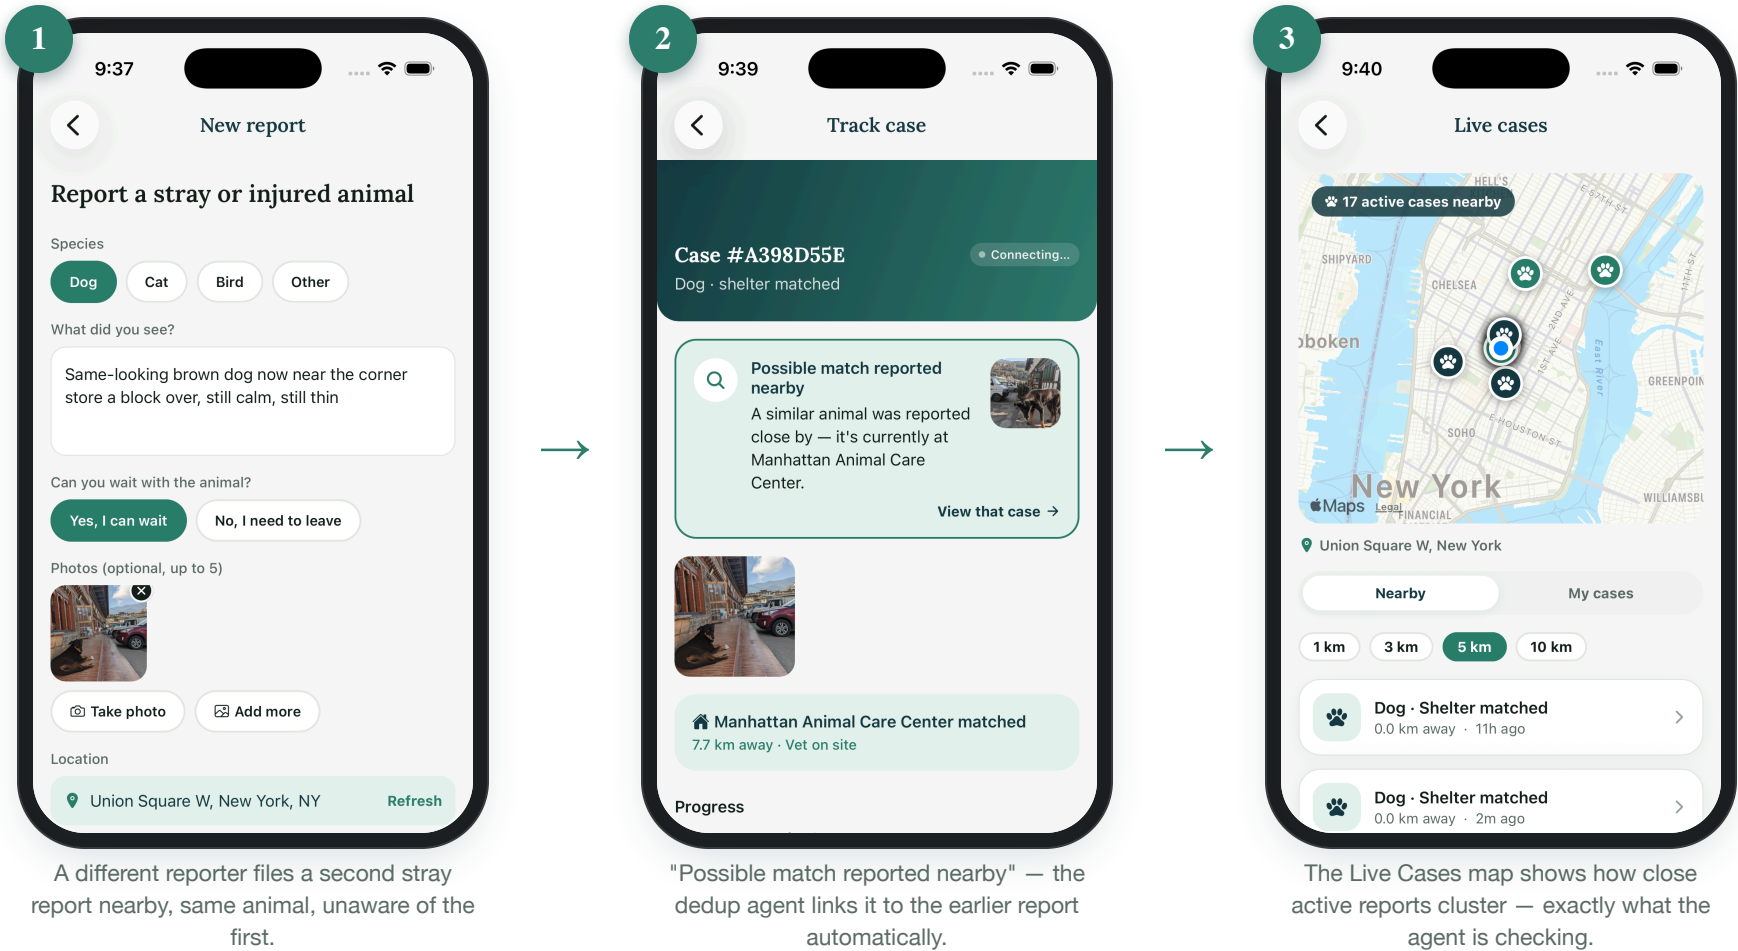

What this shows: The dedup agent scores every active case within 1 km / 3 hours on species, distance, and plausible movement — merging near-certain duplicates and soft-linking probable ones for a human to glance at.

A lost-pet report finds its match

Someone already reported this dog as a stray. The owner never has to know that — the app tells them where to look.

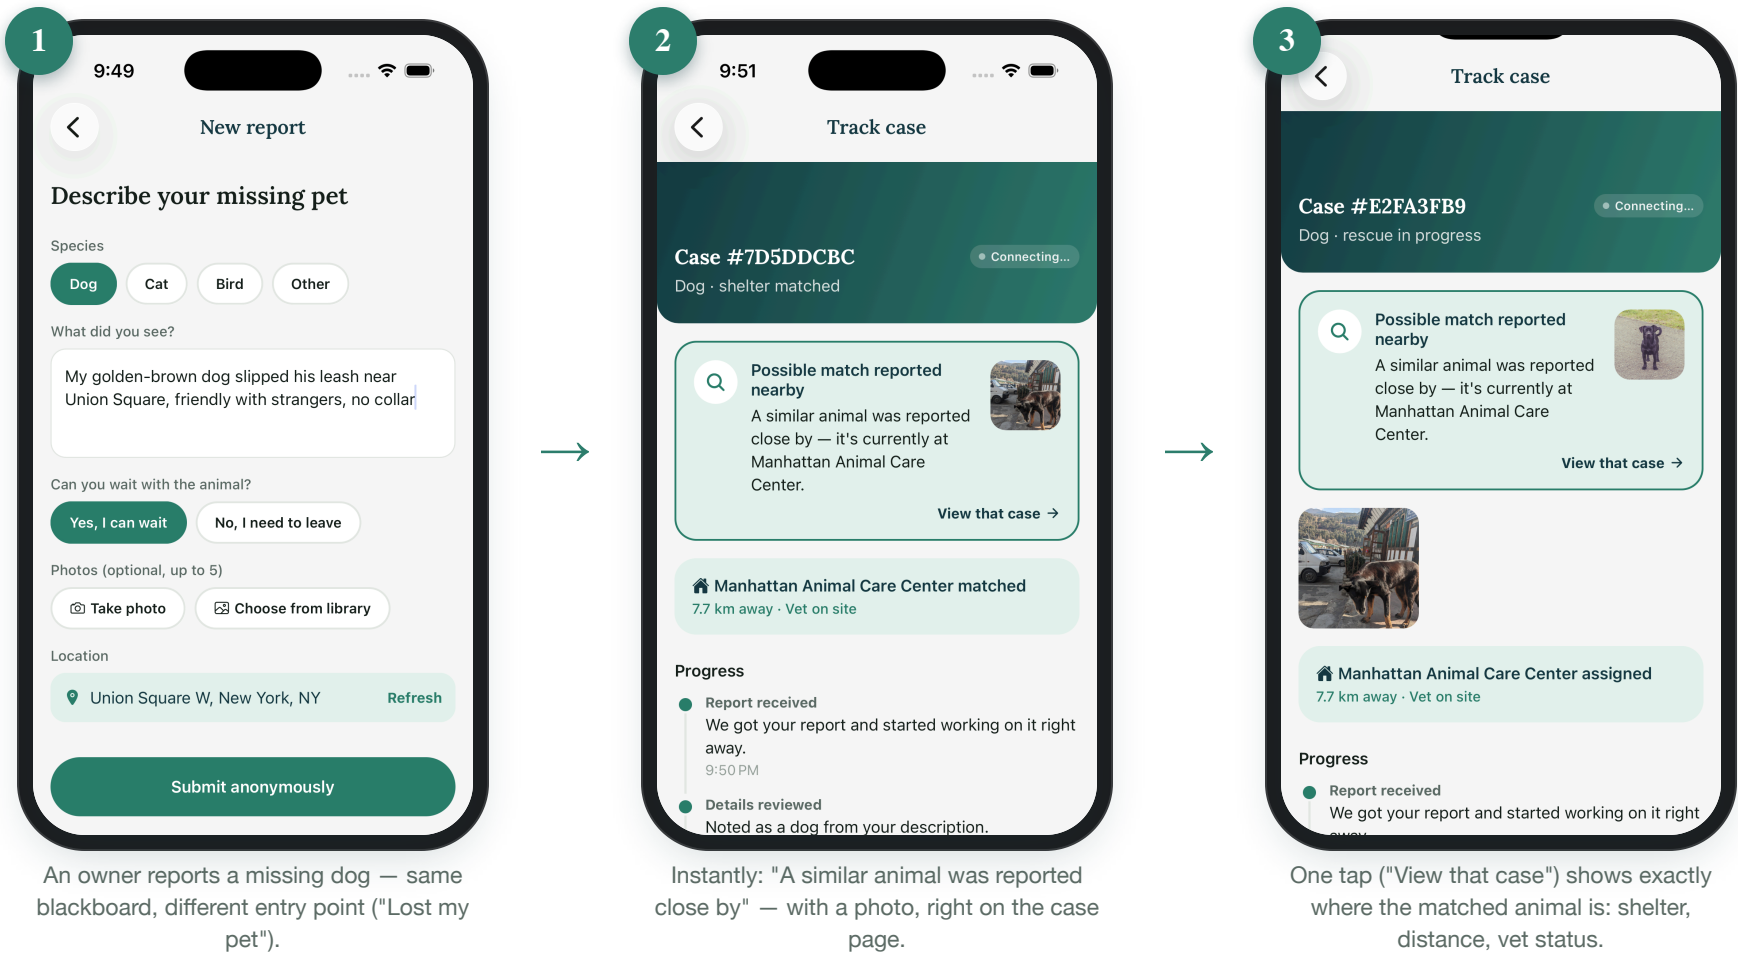

What this shows: Lost and found reports live on the same blackboard — a reunion is just a dedup link viewed from the other side, surfaced the moment it's found, not after a coordinator digs for it.