

B2.3.9.2 Home to Subordinate Write transactions

Figure B2.16 shows the possible transaction flows for a Home to Subordinate Write transaction.

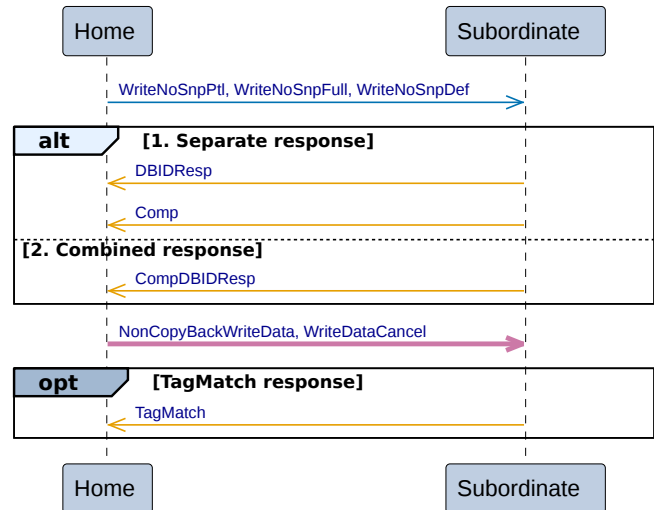


Figure B2.16: Home to Subordinate Write transactions

The sequence for the Home to Subordinate Write transaction is:

- The transaction starts with the Home issuing a [WriteNoSnpPtl](#), [WriteNoSnpFull](#), or [WriteNoSnpDef](#) request to the Subordinate.
- The Subordinate has two alternatives to return the completion response and the data request response to the Home.

1. Separate response

The Subordinate does both the following:

- Returns a Data request response, DBIDResp, to the Home.
- Returns a completion response, Comp, to the Home. It is permitted, but not required, to wait for write data, NonCopyBackWriteData, or a cancellation, WriteDataCancel, before returning Comp.

2. Combined response

The Subordinate returns a combined data request and completion response, CompDBIDResp, to the Home.

- The Home sends write data, NonCopyBackWriteData, or a cancellation, WriteDataCancel, to the Subordinate. The Home must only send this after receiving DBIDResp or CompDBIDResp.
- Optionally, when the request requires a TagMatch response, the Subordinate returns a Tag match response, TagMatch, to the Home. It is permitted, but not required, to wait for write data before returning TagMatch.

B2.3.9.3 Home to Subordinate Write Zero transactions

Figure B2.17 shows the possible transaction flows for a Home to Subordinate Write Zero transaction.