


Class EmpBooking

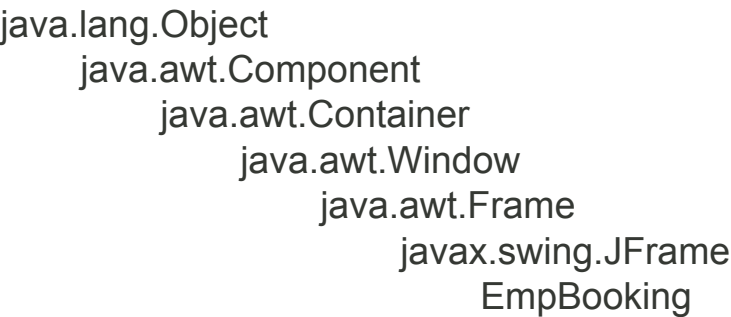

All Implemented Interfaces:

`java.awt.image.ImageObserver`, `java.awt.MenuContainer`, `java.io.Serializable`, `javax.accessibility.Accessible`, `javax.swing.RootPaneContainer`, `javax.swing.WindowConstants`

```
public class EmpBooking
extends javax.swing.JFrame
```

See Also:

[Serialized Form](#)

Nested Class Summary

Nested classes/interfaces inherited from class javax.swing.JFrame

`javax.swing.JFrame.AccessibleJFrame`

Nested classes/interfaces inherited from class java.awt.Frame

`java.awt.Frame.AccessibleAWTFrame`

Nested classes/interfaces inherited from class java.awt.Window

`java.awt.Window.AccessibleAWTWindow`, `java.awt.Window.Type`

Nested classes/interfaces inherited from class java.awt.Container

`java.awt.Container.AccessibleAWTContainer`

Nested classes/interfaces inherited from class java.awt.Component

java.awt.Component.AccessibleAWTComponent,
java.awt.Component.BaselineResizeBehavior,
java.awt.Component.BltBufferStrategy, java.awt.Component.FlipBufferStrategy

Field Summary

Fields

Modifier and Type	Field and Description
(package private) java.sql.Connection	conn Create the frame.
private javax.swing.JPanel	contentPane
private javax.swing.JTextField	textField_3
private javax.swing.JTextField	textField_4

Fields inherited from class javax.swing.JFrame

accessibleContext, EXIT_ON_CLOSE, rootPane, rootPaneCheckingEnabled

Fields inherited from class java.awt.Frame

CROSSHAIR_CURSOR, DEFAULT_CURSOR, E_RESIZE_CURSOR, HAND_CURSOR, ICONIFIED, MAXIMIZED_BOTH, MAXIMIZED_HORIZ, MAXIMIZED_VERT, MOVE_CURSOR, N_RESIZE_CURSOR, NE_RESIZE_CURSOR, NORMAL, NW_RESIZE_CURSOR, S_RESIZE_CURSOR, SE_RESIZE_CURSOR, SW_RESIZE_CURSOR, TEXT_CURSOR, W_RESIZE_CURSOR, WAIT_CURSOR

Fields inherited from class java.awt.Component

BOTTOM_ALIGNMENT, CENTER_ALIGNMENT, LEFT_ALIGNMENT, RIGHT_ALIGNMENT, TOP_ALIGNMENT

Fields inherited from interface javax.swing.WindowConstants

DISPOSE_ON_CLOSE, DO_NOTHING_ON_CLOSE, HIDE_ON_CLOSE

Fields inherited from interface java.awt.image.ImageObserver

ABORT, ALLBITS, ERROR, FRAMEBITS, HEIGHT, PROPERTIES, SOMEBITS, WIDTH

Constructor Summary

Constructors

Constructor and Description

EmpBooking()

Method Summary

All Methods

Static Methods

Concrete Methods

Modifier and Type	Method and Description
-------------------	------------------------

Method and Description

```
static void      main(java.lang.String[] args)
                Launch the application.
```

```
main( java.lang.String[] args)
```

Launch the application.

Methods inherited from class javax.swing.JFrame

```
addImpl, createRootPane, frameInit, getAccessibleContext, getContentPane,
getDefaultCloseOperation, getGlassPane, getGraphics, getJMenuBar,
getLayeredPane, getRootPane, getTransferHandler,
isDefaultLookAndFeelDecorated, isRootPaneCheckingEnabled, paramString,
processWindowEvent, remove, repaint, setContentPane,
setDefaultCloseOperation, setDefaultLookAndFeelDecorated, setGlassPane,
setIconImage, setJMenuBar, setLayeredPane, setLayout, setRootPane,
setRootPaneCheckingEnabled, setTransferHandler, update
```

Methods inherited from class `java.awt.Frame`

```
addNotify, getCursorType, getExtendedState, getFrames, getIconImage,
getMaximizedBounds, getMenuBar, getState, getTitle, isResizable,
isUndecorated, remove, removeNotify, setBackground, setCursor,
setExtendedState, setMaximizedBounds, setMenuBar, setOpacity, setResizable,
setShape, setState, setTitle, setUndecorated
```

Methods inherited from class `java.awt.Window`

```
addPropertyChangeListener, addPropertyChangeListener,  
addWindowFocusListener, addWindowListener, addWindowStateListener,  
applyResourceBundle, applyResourceBundle, createBufferStrategy,  
createBufferStrategy, dispose, getBackground, getBufferStrategy,  
getFocusableWindowState, getFocusCycleRootAncestor, getFocusOwner,
```

getFocusTraversalKeys, getIconImages, getInputContext, getListeners, getLocale, getModalExclusionType, getMostRecentFocusOwner, getOpacity, getOwnedWindows, getOwner, getOwnerlessWindows, getShape, getToolkit, getType, getWarningString, getWindowFocusListeners, getWindowListeners, getWindows, getWindowStateListeners, hide, isActive, isAlwaysOnTop, isAlwaysOnTopSupported, isAutoRequestFocus, isFocusableWindow, isFocusCycleRoot, isFocused, isLocationByPlatform, isOpaque, isShowing, isValidRoot, pack, paint, postEvent, processEvent, processWindowFocusEvent, processWindowStateEvent, removeWindowFocusListener, removeWindowListener, removeWindowStateListener, reshape, setAlwaysOnTop, setAutoRequestFocus, setBounds, setBounds, setCursor, setFocusableWindowState, setFocusCycleRoot, setIconImages, setLocation, setLocation, setLocationByPlatform, setLocationRelativeTo, setMinimumSize, setModalExclusionType, setSize, setSize, setType, setVisible, show, toBack, toFront

Methods inherited from class java.awt.Container

add, add, add, add, add, addContainerListener, applyComponentOrientation, areFocusTraversalKeysSet, countComponents, deliverEvent, doLayout, findComponentAt, findComponentAt, getAlignmentX, getAlignmentY, getComponent, getComponentAt, getComponentAt, getComponentCount, getComponents, getComponentZOrder, getContainerListeners, getFocusTraversalPolicy, getInsets, getLayout, getMaximumSize, getMinimumSize, getMousePosition, getPreferredSize, insets, invalidate, isAncestorOf, isFocusCycleRoot, isFocusTraversalPolicyProvider, isFocusTraversalPolicySet, layout, list, list, locate, minimumSize, paintComponents, preferredSize, print, printComponents, processContainerEvent, remove, removeAll, removeContainerListener, setComponentZOrder, setFocusTraversalKeys, setFocusTraversalPolicy, setFocusTraversalPolicyProvider, setFont, transferFocusDownCycle, validate, validateTree

Methods inherited from class java.awt.Component

action, add, addComponentListener, addFocusListener, addHierarchyBoundsListener, addHierarchyListener, addInputMethodListener, addKeyListener, addMouseListener, addMouseMotionListener, addMouseWheelListener, bounds, checkImage, checkImage, coalesceEvents, contains, contains, createImage, createImage, createVolatileImage, createVolatileImage, disable, disableEvents, dispatchEvent, enable, enable, enableEvents, enableInputMethods, firePropertyChange, firePropertyChange, firePropertyChange, firePropertyChange, firePropertyChange, firePropertyChange, firePropertyChange, firePropertyChange, firePropertyChange, getBaseline, getBaselineResizeBehavior, getBounds, getBounds, getColorModel, getComponentListeners, getComponentOrientation, getCursor, getDropTarget, getFocusListeners, getFocusTraversalKeysEnabled,

getFont, getFontMetrics, getForeground, getGraphicsConfiguration, getHeight, getHierarchyBoundsListeners, getHierarchyListeners, getIgnoreRepaint, getInputMethodListeners, getInputMethodRequests, getKeyListeners, getLocation, getLocation, getLocationOnScreen, getMouseListeners, getMouseMotionListeners, getMousePosition, getMouseWheelListeners, getName, getParent, getPeer, getPropertyChangeListeners, getPropertyChangeListeners, getSize, getSize, getTreeLock, getWidth, getX, getY, gotFocus, handleEvent, hasFocus, imageUpdate, inside, isBackgroundSet, isCursorSet, isDisplayable, isDoubleBuffered, isEnabled, isFocusable, isFocusOwner, isFocusTraversable, isFontSet, isForegroundSet, isLightweight, isMaximumSizeSet, isMinimumSizeSet, isPreferredSizeSet, isValid, isVisible, keyDown, keyUp, list, list, list, location, lostFocus, mouseDown, mouseDrag, mouseEnter, mouseExit, mouseMove, mouseUp, move, nextFocus, paintAll, prepareImage, prepareImage, printAll, processComponentEvent, processFocusEvent, processHierarchyBoundsEvent, processHierarchyEvent, processInputMethodEvent, processKeyEvent, processMouseEvent, processMouseMotionEvent, processMouseWheelEvent, removeComponentListener, removeFocusListener, removeHierarchyBoundsListener, removeHierarchyListener, removeInputMethodListener, removeKeyListener, removeMouseListener, removeMouseMotionListener, removeMouseWheelListener, removePropertyChangeListener, removePropertyChangeListener, repaint, repaint, repaint, requestFocus, requestFocus, requestFocusInWindow, requestFocusInWindow, resize, resize, revalidate, setComponentOrientation, setDropTarget, setEnabled, setFocusable, setFocusTraversalKeysEnabled, setForeground, setIgnoreRepaint, setLocale, setMaximumSize, setName, setPreferredSize, show, size, toString, transferFocus, transferFocusBackward, transferFocusUpCycle

Methods inherited from class java.lang.Object

clone, equals, finalize, getClass, hashCode, notify, notifyAll, wait, wait, wait

Methods inherited from interface java.awt.MenuContainer

getFont, postEvent

Field Detail

contentPane

private javax.swing.JPanel contentPane

conn

```
java.sql.Connection conn
```

Create the frame.

textField_3

```
private javax.swing.JTextField textField_3
```

textField_4

```
private javax.swing.JTextField textField_4
```

Constructor Detail

EmpBooking

```
public EmpBooking()
```

Method Detail

main

```
public static void main(java.lang.String[] args)
```

Launch the application.