

Safari File Edit View History Bookmarks Develop Window Help

Hosting API

Section 11, Lecture 81

Heroku, Inc.

Go to Dashboard

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

HEROKU Products Elements Pricing Documentation Support More Log in or Sign up

MOVE FAST

## Unleash your inner startup

Choose Heroku for the same reasons disruptive startups do: it's the best platform for building with modern architectures, innovating quickly, and scaling precisely to meet demand.

SIGN UP FOR FREE

Explore Heroku Customers

Get straight to building apps

Setting up, operating and maintaining your own platform is not where the race is won. Avoid the risk and complexity, and dedicate your energy to what really matters: building great apps.

Transcript Browse Q&A Add Bookmark Continue ►

CC

Safari File Edit View History Bookmarks Develop Window Help

Hosting API

Section 11, Lecture 81

Go to Data

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

## Free account

Create apps, connect databases and add-on services, and collaborate on your apps, for free.

### Your app platform

A platform for apps, with app management & instant scaling, for development and production.

### Deploy now

Go from code to running app in minutes. Deploy, scale, and deliver your app to the world.

First name\*

Last name\*

Email Address\*

Company name

Country\*

Primary Development Language\*

I'm not a robot

reCAPTCHA

Privacy Terms

CREATE FREE ACCOUNT



Safari File Edit View History Bookmarks Develop Window Help

Hosting API Section 11, Lecture 81

Heroku, Inc.

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Personal apps | Heroku Create a New App | Heroku

HEROKU Jump to Favorites, Apps, Pipelines, Spaces...

Prebuilt api for slack app clone.

devslopes/mac-chat-api#master

App Name (optional) chattychatchat ✓  
Leave blank and we'll choose one for you. chattychatchat is available

Runtime Selection United States

Your app can run in your choice of region in the Common Runtime.

Add-ons mLab MongoDB Sandbox Free

Deploy

Safari Edit View History Bookmarks Develop Window Help

Hosting API Section 11, Lecture 81

Heroku, Inc.

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Personal apps | Heroku Create a New App | Heroku

HEROKU

App Name (optional)  
Leave blank and we'll choose one for you.

Runtime Selection  
Your app can run in your choice of region in the Common Runtime.

Add-ons

Sandbox Free

Enter your payment information

Your account must be verified to create this app. Please add payment information to verify your account.

Credit Card Number \* e.g. 4444 5555 7777 8888

Expiration \* MM/YYYY

Security Code (CVV) \* 123

First Name \* Last Name \*

Billing Address Line 1

Billing Address Line 2

City State/Province

Zip/Postal Code Country

Additional Information (company name, tax ID, etc.)

Transcript Browse Q&A Add Bookmark Continue ► CC Settings

1.75x 05:29 / 19:58

Safari File Edit View History Bookmarks Develop Window Help

Hosting API

Section 11, Lecture 81

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Heroku, Inc.

Go to Dashboard

Personal apps | Heroku chattychatchat · Settings | Heroku https://chattychatchat.herokuapp.com/ mLab: Cloud-hosted MongoDB

HEROKU Jump to Favorites, Apps, Pipelines, Spaces... HEROKU ON ONE https://heroku.com/chattychatchat.gyo

Buildpacks

Buildpacks are scripts that are run when your app is deployed. They are used to install dependencies for your app and configure your environment.

[Find New Buildpacks at Heroku Elements](#)

Add buildpack

heroku/nodejs

Buildpacks

Domains and certificates

Add your custom domains here then [point your DNS to Heroku](#).

Domain Your app can be found at <https://chattychatchat.herokuapp.com/>

SSL Upgrade to paid dynos to configure Heroku SSL

Add domain

Custom domains will appear here

Custom domains allow you to access your app via one or more non-Heroku domain names (for example, [www.yourcustomdomain.com](http://www.yourcustomdomain.com))



Section 11, Lecture 81

Personal apps | Heroku

Search GitHub

Top Hit

devslopes/mac-chat-api: Prebuilt api for slack app clone. — [github.com/devslopes/mac-chat-api](https://github.com/devslopes/mac-chat-api)

Bookmarks and History

devslopes

Pull Requests · devslopes/mac-chat-api

Home · devslopes/book-assets Wiki · GitHub

mac-chat-api/src at master · devslopes/mac-chat-api

mac-chat-api/src/config at master · devslopes/mac-chat-api

mac-chat-api/index.js at master · devslopes/mac-chat-api

mac-chat-api/package.json at master · devslopes/mac-chat-api

github.com/devslopes

github.com/devslopes/mac-ch...

github.com/devslopes/book-as...

github.com/devslopes/mac-ch...

github.com/devslopes/mac-ch...

github.com/devslopes/mac-ch...

github.com/devslopes/mac-ch...

github.com/devslopes/mac-ch...

GitHub

Using the Hello World guide, you'll create a repository, start a branch, write comments, and open a pull request.

Read the guide

Start a project

A screenshot of the GitHub homepage. A modal window is open in the center, displaying a message: "You've been added to the devslopes organization!". Below the message, there are quick tips for organization members. To the right of the modal, the main GitHub interface is visible, showing the user's repositories and activity feed. The URL "github.com/devslopes/mac-chat-api" is prominently displayed at the top of the page.

jbburgoyn You've been added to the devslopes organization!

Here are some quick tips for a first-time organization member.

- Use the switch context button in the upper left corner of this page to switch between your personal context (jbburgoyn) and organizations you are a member of.
- After you switch contexts you'll see an organization-focused dashboard that lists out organization repositories and activities.

defunkt

Repositories you contribute to 1

devslopes/mac-chat-api 1 ★

Your repositories 13 New repository

Find a repository...

All Public Private Sources Forks

pokedex2

luetzow deleted branch socketReloc at devslopes/mac-chat-api 10 days ago

Transcript

08:39 / 19:58

Add Bookmark

Continue N

Hosting API

Section 11, Lecture 81

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Personal apps | Heroku

devslopes/mac-chat-api: Prebuilt api for slack app clone.

This repository Search Pull requests Issues Marketplace Gist

Unwatch 5 Star 1 Fork 0

devslopes / mac-chat-api

Code Issues 0 Pull requests 0 Projects 0 Wiki Insights

Prebuilt api for slack app clone.

95 commits 1 branch 0 releases 2 contributors

Branch: master New pull request Create new file Upload files Find file Clone or download

jluetzow committed on GitHub Merge pull request #12 from devslopes/socketReloc ...


src set port and url back  
.babelrc rebuilt start project in es6 and now adding auth  
.gitignore test get is working without auth  
README.md Update README.md  
app.json deploy test  
package.json added auto deploy script

Clone with HTTPS Use SSH  
Use Git or checkout with SVN using the web URL.  
<https://github.com/devslopes/mac-chat-api>

Copy to clipboard Open in Desktop Download ZIP 14 days ago 20 days ago 14 days ago

ADME.md

mac-chat-api

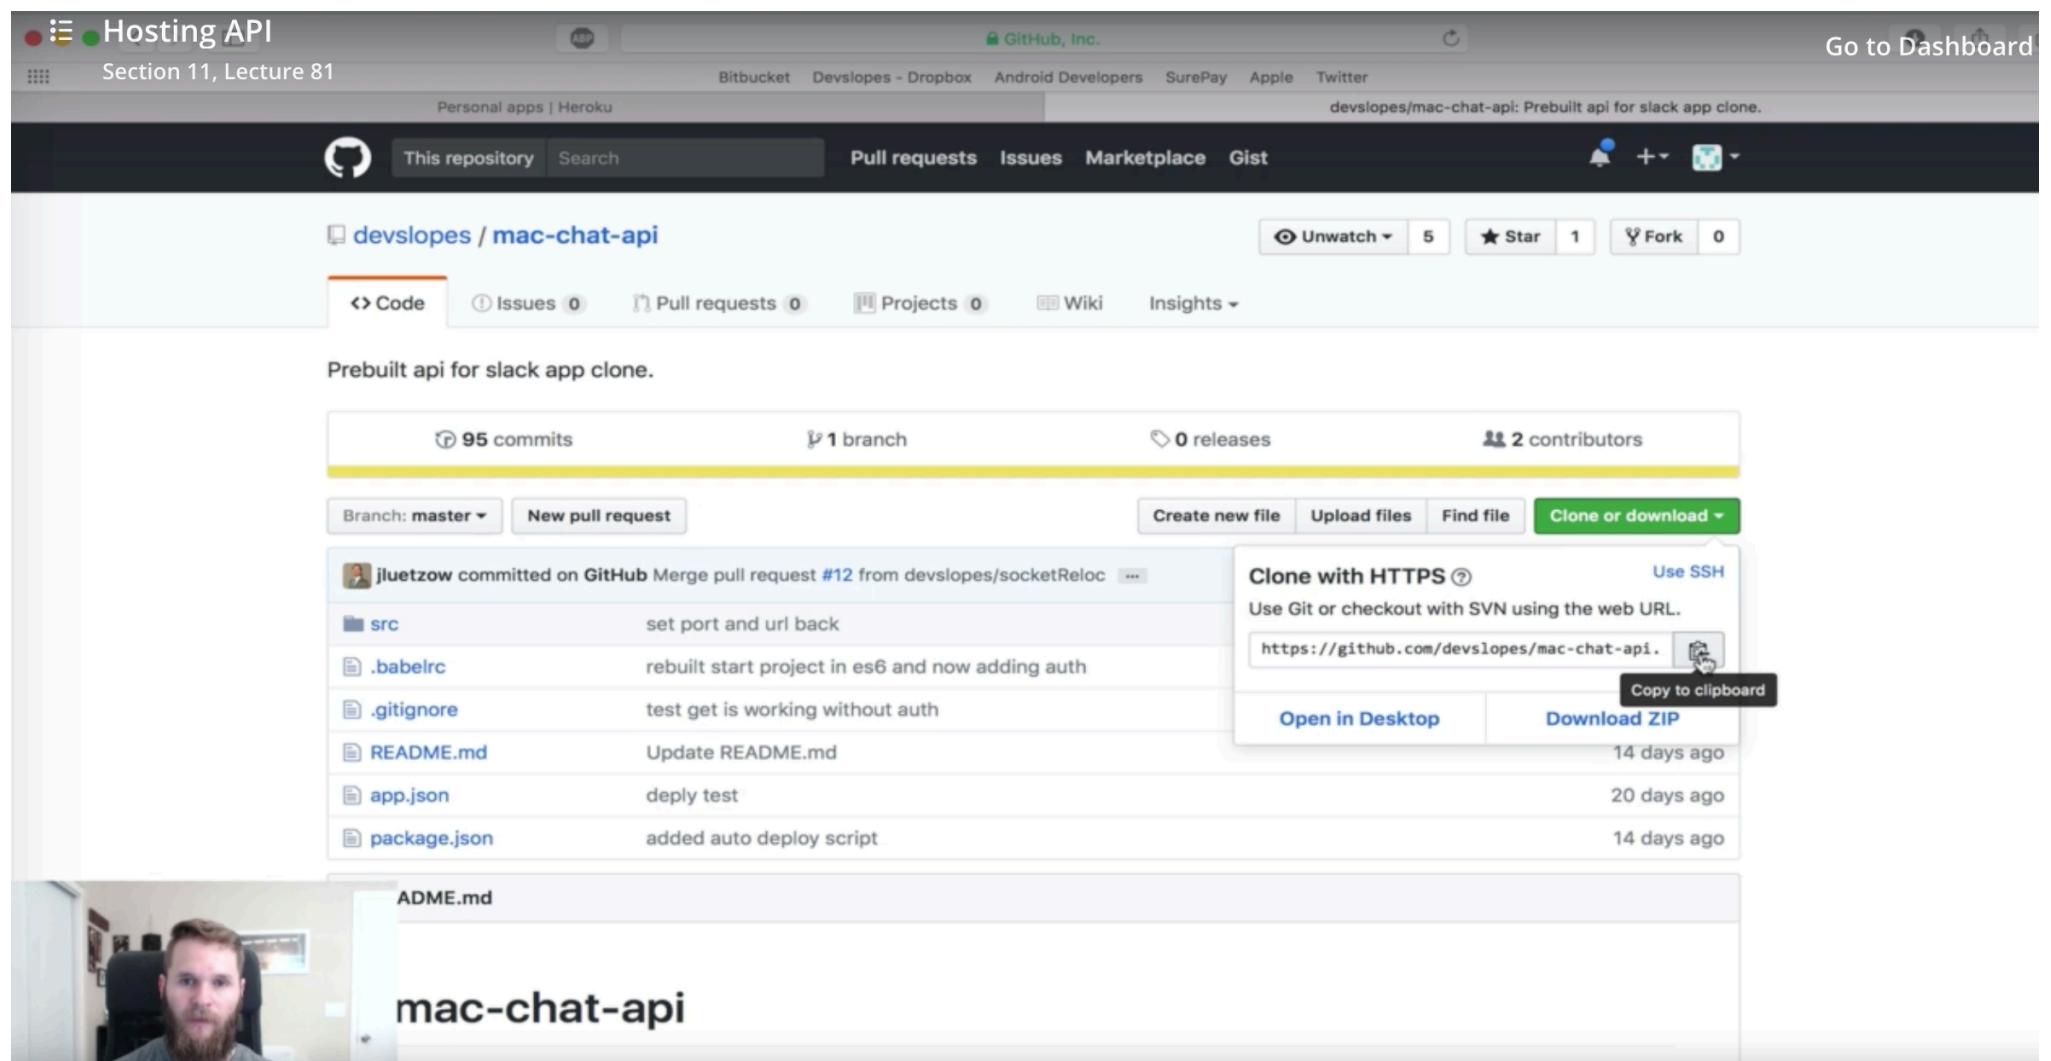

Hosting API

Section 11, Lecture 81

GitHub, Inc.

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Go to Dashboard

Personal apps | Heroku

devslopes/mac-chat-api: Prebuilt api for slack app clone.

This repository Search Pull requests Issues Marketplace Gist

Last login: Wed May 24 15:41:16 on ttys000  
-bash: /Users/jonnyb/.profile: No such file or directory  
Jonnys-MacBook-Pro:~ jonnyb\$ cd  
Jonnys-MacBook-Pro:~ jonnyb\$ cd Desktop/  
Jonnys-MacBook-Pro:Desktop jonnyb\$ git clone https://github.com/devslopes/mac-chat-api.git  
Cloning into 'mac-chat-api'...  
remote: Counting objects: 2904, done.  
remote: Total 2904 (delta 0), reused 0 (delta 0), pack-reused 2904  
Receiving objects: 100% (2904/2904), 2.39 MiB | 1.06 MiB/s, done.  
Resolving deltas: 100% (848/848), done.  
Jonnys-MacBook-Pro:Desktop jonnyb\$ atom .


0

ad ▾

SSH

ago ago ago


mac-chat-api

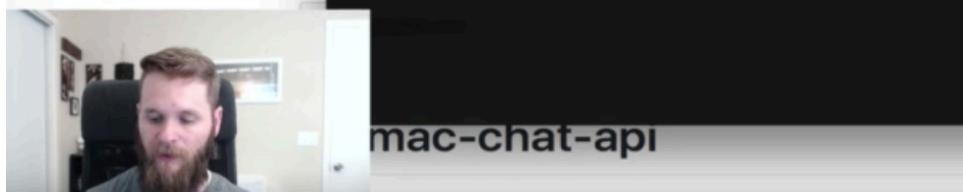

# Hosting API

Project  
Section 11, Lecture 81

Go to Dashboard

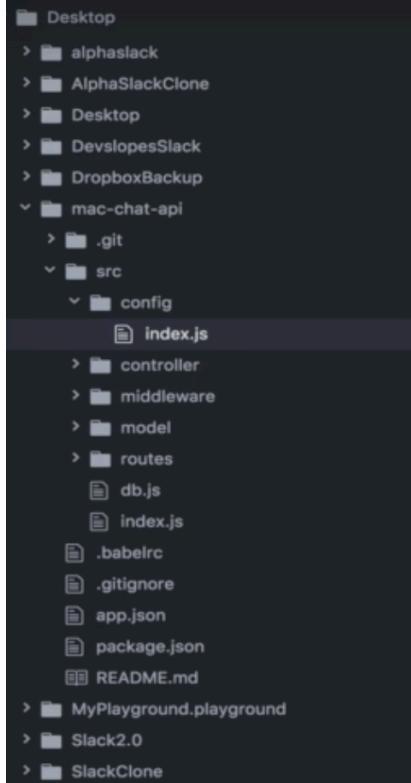

```
index.js — ~/Desktop  
index.js  
1 import mongodb from 'mongodb';  
2  
3 export default {  
4   // "port": 3005,  
5   // "mongoUrl": "mongodb://localhost:27017/chat-api",  
6   "port": process.env.PORT,  
7   "mongoUrl": process.env.MONGODB_URI,  
8   "bodyLimit": "100kb"  
9 }  
10
```

[Go to Dashboard](#)

Section 11, Lecture 81

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Personal apps | Heroku

devslopes/mac-chat-api: Prebuilt api for slack app clone.

Create Account | mLab

 mLab

DOCS & SUPPORT [LOG IN](#)

**Create a new account**

Signing up for a mLab account will allow you to create and manage hosted MongoDB databases.

Account name

Username

Email

Password

Confirm password

I accept mLab's Master Services Agreement

[Create account](#) Already registered? [Log in](#)



Section 11, Lecture 81

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

mLab: Cloud-hosted MongoDB

Personal apps | Heroku

devslopes/mac-chat-api: Prebuilt api for slack app clone.

Go to Dashboard

**mLab**

WELCOME PLANS & PRICING PLAN COMPARISON DOCS & SUPPORT ACCOUNT LOG OUT

{ user: "jonnyb", account: "BurgoyneInc" }

Home

**MongoDB Deployments**


None exist at this time. Click "Create new" to create a fully managed MongoDB deployment on AWS, Azure, or Google.

Create from backup Create new

**Private Environments**

None exist at this time. Click "Create new" to create an [mLab Private Environment](#) (VPC) on AWS.

Create new

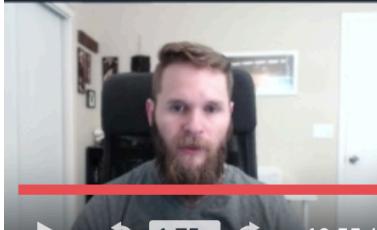

47% 10:55 / 10:59

Transcript Browser 0.8.1 Add Deployment Continue Next

help

Hosting API

Section 11, Lecture 81

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Personal apps | Heroku devslopes/mac-chat-api: Prebuilt api for slack app clone.

mLab: Cloud-hosted MongoDB Go to Dashboard

## Create new deployment

Fill out this form to create a brand-new MongoDB deployment in the cloud location of your choice.

Alternatively, you can [create a new deployment from backup](#).

**Cloud Provider:**

Region: AWS US East (Virginia) (us-east-1) ▾

**Plan** ([view plan details](#)) :


Single-node      Replica set cluster

These plan(s) are perfect for development/testing/staging environments as well as for utility instances that do not require high availability.

**Standard Line**

The most economical plans for applications running on AWS.

	FREE
<input checked="" type="radio"/> <b>Sandbox</b> (shared, 0.5 GB)	
<input type="radio"/> <b>M3 Single-node</b> (7.5 GB, 120 GB SSD block storage)	\$ 420
<input type="radio"/> <b>M4 Single-node</b> (15 GB, 240 GB SSD block storage)	\$ 835
<input type="radio"/> <b>M5 Single-node</b> (34.2 GB, 480 GB SSD block storage)	\$ 1310
<input type="radio"/> <b>M6 Single-node</b> (68.4 GB, 700 GB SSD block storage)	\$ 2045

 **Hosting API**  

Section 11, Lecture 81  Go to Dashboard

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Personal apps | Heroku  devslpes/mac-chat-api: Prebuilt api for slack app clone.

 M6 Single-node (68.4 GB, 700 GB SSD block storage) \$ 2045

 M3 Single-node (7.5 GB, 300 GB SSD block storage) \$ 500

 M4 Single-node (15 GB, 600 GB SSD block storage) \$ 1000

 M5 Single-node (34.2 GB, 1 TB SSD block storage) \$ 1545

 M6 Single-node (68.4 GB, 1 TB SSD block storage) \$ 2180

**High Storage Line**

Plans which offer a higher storage-to-RAM ratio than those in the Standard line and are geared towards applications that need to store large amounts of data but have more modest performance requirements.

MongoDB version: 3.2.x (MMAPv1) 

---

**Database Name:**

**Price:** **\$0 / month**

 **Create new MongoDB deployment**

[Home](#)

## Database: chattychatchat

To connect using the mongo shell:

```
% mongo ds155191.mlab.com:55191/chattychatchat -u <dbuser> -p <dbpassword>
```

To connect using a driver via the standard MongoDB URI ([what's this?](#)):

```
mongodb://<dbuser>:<dbpassword>@ds155191.mlab.com:55191/chattychatchat
```



Sandbox databases do not have redundancy and therefore are not suitable for production. Visit our [guide to running in production](#) for more info.



A database user is required to connect to this database. To create one now, visit the 'Users' tab and click the 'Add database user' button.

[Collections](#)[Users](#)[Stats](#)[Backups](#)

## Collections

Personal apps | HEROKU Devlopers | Chat API | Product API for Slack app clone.

Go to Dashboard

## Hosting API

Section 11, Lecture 81

Database: chattychatchat

**X** Delete database

To connect using the mongo shell:

```
% mongo ds155191.mlab.com:55191/chattychatchat -u <dbuser> -p <dbpassword>
```

To connect using a driver via the standard MongoDB URI ([what's this?](#)):

```
mongodb://<dbuser>:<dbpassword>@ds155191.mlab.com:55191/chattychatchat
```

**⚠** Sandbox databases do not have redundancy and therefore a database user is required to connect to this database. To learn more, see [MongoDB in the Cloud](#).

Collections      Users

Database Users

[None at this time]

Add new database user

Database username\*

Database password\*

Confirm password\*

 **🔑**

Make read-only

CANCEL      CREATE

version: 3.2.13 (MMAPv1)

Tools

+ Add database user

This screenshot shows the Heroku MongoDB interface for the 'chattychatchat' database. On the left, there are two tabs: 'Collections' and 'Users'. The 'Users' tab is selected, indicated by a blue background and white text. Below the tabs, it says 'Database Users' and '[None at this time]'. A modal window titled 'Add new database user' is open in the center. It contains fields for 'Database username\*' (set to 'jonnyb'), 'Database password\*', 'Confirm password\*', and a checkbox for 'Make read-only'. At the bottom of the modal are 'CANCEL' and 'CREATE' buttons, with 'CREATE' being highlighted. In the background, there are two warning messages: one about sandbox databases not having redundancy and requiring a user, and another about MongoDB in the Cloud. The top of the screen shows navigation links like 'Personal apps', 'HEROKU', 'Devlopers', 'Chat API', 'Product API for Slack app clone', 'Go to Dashboard', and a delete button.

Hosting API

Section 11, Lecture 81

Desktop

DevslopesSlack

DropboxBackup

mac-chat-api

- .git
- src
  - config
    - index.js
  - controller
  - middleware
  - model
  - routes
  - db.js
  - index.js
- .babelrc
- .gitignore
- app.json
- package.json
- README.md

MyPlayground.playground

Slack2.0

SlackClone

Go to Dashboard

```
2
3   export default {
4     // "port": 3005,
5     // "mongoUrl": "mongodb://localhost:27017/chat-api",
6     "port": process.env.PORT,
7     "mongoUrl": "mongodb://jonnyb:123456@ds155191.mlab.com:55191/chattychatchat",
8     "bodyLimit": "100kb"
9   }
10
```



Safari File Edit View History Bookmarks Develop Window Help

Hosting API

Section 11, Lecture 81

Create a New App | Heroku

Heroku, Inc.

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Go to Dashboard

devslopes/mac-chat-api: Prebuilt api for slack app clone.

mLab: Cloud-hosted MongoDB

HEROKU

Jump to Favorites, Apps, Pipelines, Spaces...

Create New App

App Name (optional)

Leave blank and we'll choose one for you.

chattychatjb

chattychatjb is available

Runtime Selection

Your app can run in your choice of region in the Common Runtime.

United States

Create App



Safari File Edit View History Bookmarks Develop Window Help

Hosting API brew.sh Go to Dashboard

Section 11, Lecture 81 Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

chattychatjb · Heroku · git | Heroku Heroku CLI | Heroku Dev Center Homebrew — The missing package manager... devslopes/mac-chat-api: Prebuilt api for sl... mLab: Cloud-hosted MongoDB

Fork me on GitHub

The screenshot shows a web browser window with the URL `brew.sh` in the address bar. The page content is the official Homebrew website. At the top, there's a logo of a beer mug with foam and an apple. Below it, the word "Homebrew" is written in large, bold, white letters. Underneath, it says "The missing package manager for macOS". A language dropdown menu shows "English". On the right side of the main content area, there's a "Install Homebrew" section with a command-line instruction: `/usr/bin/ruby -e "$(curl -fsSL https://raw.githubusercontent.com/Homebrew/install/master/install)"`. To the left of the command, it says "Paste that at a Terminal prompt." To the right, it explains the script's behavior and links to more installation options. At the bottom of the page, there's a section titled "What Does Homebrew Do?" with a sub-note: "Homebrew installs the stuff you need that Apple didn't." The browser interface includes standard navigation buttons (back, forward, search) and a status bar at the bottom showing video controls (play/pause, volume, etc.) and a timestamp of 15:02 / 19:58.

Terminal Shell Edit View Window Help

Hosting API

Section 11, Lecture 81

chattychatjb · Heroku-git | Heroku Support

Heroku CLI | Heroku Dev Center

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Homebrew — The missing package manager... devslopes/mac-chat-api: Prebuilt api for sl...

Go to Dashboard

Accounts & Billing

Organization Accounts

- Heroku Postgres
- Heroku Redis
- Apache Kafka on Heroku
- Heroku Connect
- Dev Center
- Heroku Labs
- Languages
- Extending Heroku
- Changelog

Uninstalling the Heroku CLI

Legacy Ruby CLI


```
goofys          nvc
gpg-agent        ode
grafana         open-mpi
grails@2.5      open-mpi@1.6
graphite2       open-scene-graph
grc             opencoarrays
grib-api        opencore-amr
grpc            openrct2
==> Renamed Formulae
grunt -> grunt-cli
==> Deleted Formulae
autotrace       blucat           dvtm           libgc           libtess2
==> Using the sandbox
==> Downloading https://cli-assets.heroku.com/heroku-cli/channels/stable/heroku-cli-v6.6.17-f15d070-#####
Error: The `brew link` step did not complete successfully
The formula built, but is not symlinked into /usr/local
Could not symlink bin/heroku
Target /usr/local/bin/heroku
already exists. You may want to remove it:
rm '/usr/local/bin/heroku'

To force the link and overwrite all conflicting files:
brew link --overwrite heroku

To list all files that would be deleted:
brew link --overwrite --dry-run heroku

Possible conflicting files are:
/usr/local/bin/heroku -> /usr/local/lib/heroku/bin/heroku
==> Summary
🍺 /usr/local/Cellar/heroku/6.6.17: 5,914 files, 65.2MB, built in 9 seconds
Jonny's-MacBook-Pro:Desktop jonnyb$
```

Download and run the Windows installer 32-bit/64-bit



1.75x 15:35 / 19:58

Transcript Browse Q&A Add Bookmark Continue ► CC Settings

Safari File Edit View History Bookmarks Develop Window Help

Hosting API

Section 11, Lecture 81

chattychatjb · Heroku-git | Heroku Support

Heroku CLI | Heroku Dev Center

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Homebrew — The missing package manager... devslopes/mac-chat-api: Prebuilt api for s...

mLab: Cloud-hosted MongoDB

Go to Dashboard

Accounts & Billing

Organization Accounts

Heroku Postgres

Heroku Redis

Apache Kafka on Heroku

Heroku Connect

Dev Center

Heroku Labs

Languages

Extending Heroku

Changelog

Uninstalling the Heroku CLI

Legacy Ruby CLI

The Heroku Command Line Interface (CLI), formerly known as the Heroku Toolbelt, is a tool for creating and managing Heroku apps from the command line / shell of various operating systems.

## Download and install

### MacOS Homebrew

To install the Heroku CLI with [homebrew](#):

```
$ brew install heroku
```

Compatible with 10.7+


### MacOS Installer

Download and run the [MacOS installer](#).

Compatible with 10.7+

### Windows

Download and run the [Windows installer 32-bit/64-bit](#)



chattychatjb · Heroku-git | Heroku      Homebrew — The missing package manager for macOS      devslopes/mac-chat-api: Prebuilt api for slack app clone.      mLab: Cloud-hosted MongoDB

 HEROKU      Jump to Favorites, Apps, Pipelines, Spaces...

Deployment method

 Heroku Git  
Use Heroku CLI

 GitHub  
Connect to GitHub

 Dropbox  
Connect to Dropbox

---

Deploy using Heroku Git

Use git in the command line or a GUI tool to deploy this app.

Install the Heroku CLI

Download and install the [Heroku CLI](#).

If you haven't already, log in to your Heroku account and follow the prompts to create a new SSH public key.

\$ heroku login

Create a new Git repository

Initialize a git repository in a new or existing directory

\$ cd my-project/  
\$ git init  
\$ heroku git:remote -a chattychatjb

Deploy your application

Commit your code to the repository and deploy it to Heroku using Git.

\$ git add .  
\$ git commit -am "make it better"  
\$ git push heroku master



chattychatjb · Heroku-git | Heroku      Homebrew — The missing package manager for macOS      devslopes/mac-chat-apl: Prebuilt api for slack app clone.      mLab: Cloud-hosted MongoDB

 HEROKU      Jump to Favorites, Apps, Pipelines, Spaces...

Deployment method

 Heroku Git  
Use Heroku CLI

 GitHub  
Connect to GitHub

 Dropbox  
Connect to Dropbox

---

Deploy using Heroku Git

Use git in the command line or a GUI tool to deploy this app.

Install the Heroku CLI

Download and install the [Heroku CLI](#).

If you haven't already, log in to your Heroku account and follow the prompts to create a new SSH public key.

```
$ heroku login
```

Create a new Git repository

Initialize a git repository in a new or existing directory

```
$ cd my-project/  
$ git init  
$ heroku git:remote -a chattychatjb
```

Deploy your application

Commit your code to the repository and deploy it to Heroku using Git.

```
$ git add .  
$ git commit -am "make it better"  
$ git push heroku master
```



Terminal Shell Edit View Window Help

Hosting API

Section 11, Lecture 81

chattychatjb · Heroku-git | Heroku

Bitbucket Devslopes - Dropbox Android Developers SurePay Apple Twitter

Homebrew — The missing package manager for macOS

devslopes/mac-chat-api: Prebuilt api for slack app clone.

mLab: Cloud-hosted MongoDB

Go to Dashboard

HEROKU

```
[Jonnys-MacBook-Pro:Desktop jonnyb$ heroku login
Enter your Heroku credentials:
Email: jonny@devslopes.com
[Password: *****
Logged in as jonny@devslopes.com
[Jonnys-MacBook-Pro:Desktop jonnyb$ heroku git:remote -a chattychatjb
> 128: Command failed: git remote
> fatal: Not a git repository (or any of the parent directories): .git
Deploy using Heroku
Use git in the command line to
deploy this app.
[Jonnys-MacBook-Pro:Desktop jonnyb$ pwd
/Users/jonnyb/Desktop
[Jonnys-MacBook-Pro:Desktop jonnyb$ cd mac-chat-api/
[Jonnys-MacBook-Pro:mac-chat-api jonnyb$ heroku git:remote -a chattychatjb
> Couldn't find that app.
[Jonnys-MacBook-Pro:mac-chat-api jonnyb$ heroku git:remote -a chattychatjb
set git remote heroku to https://git.heroku.com/chattychatjb.git
[Jonnys-MacBook-Pro:mac-chat-api jonnyb$ git add .
[Jonnys-MacBook-Pro:mac-chat-api jonnyb$ git commit -am "added mongodb url"
[master 0ab45dc] added mongodb url
 1 file changed, 1 insertion(+), 1 deletion(-)
[Jonnys-MacBook-Pro:mac-chat-api jonnyb$ git push heroku master

```


Commit your code to the repository and deploy it to Heroku using Git.


```
$ git add .
$ git commit -am "make it better"
$ git push heroku master
```

Existing Git repository

For existing repositories, simply add the `heroku` remote

Transcript Browser Add Bookmark Continue N



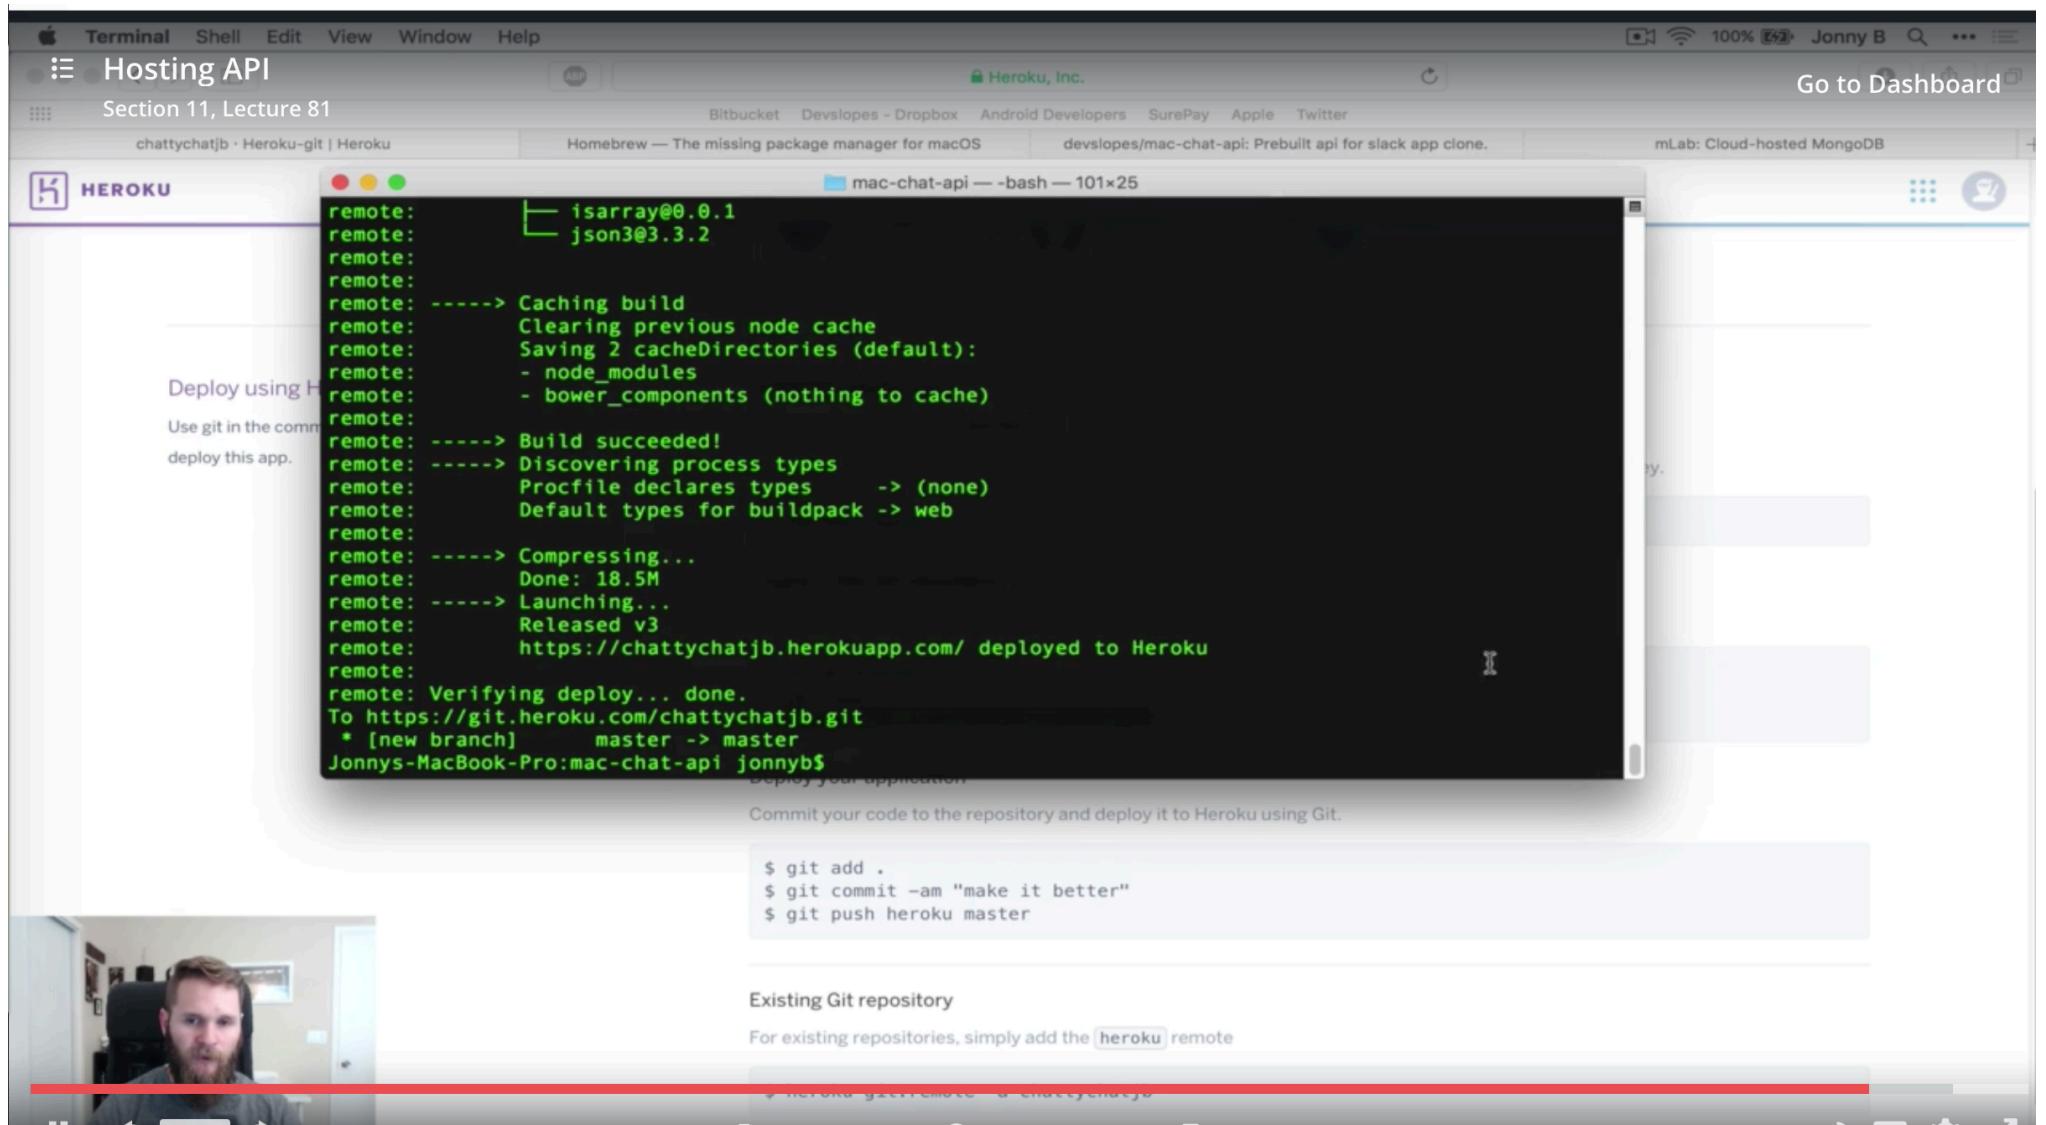

← → C 🔒 https://appychatchatrav.herokuapp.com/ ☆ 📁 💬 {≡} 🖊 G ⋮

```
1 // 20190219094417
2 // https://appychatchatrav.herokuapp.com/
3
4 {
5   "message": "Chat API is ALIVE!"
6 }
```

⚙️ ⌂ RAW ⌂ ⌂