Handling CSS in Microfrontends

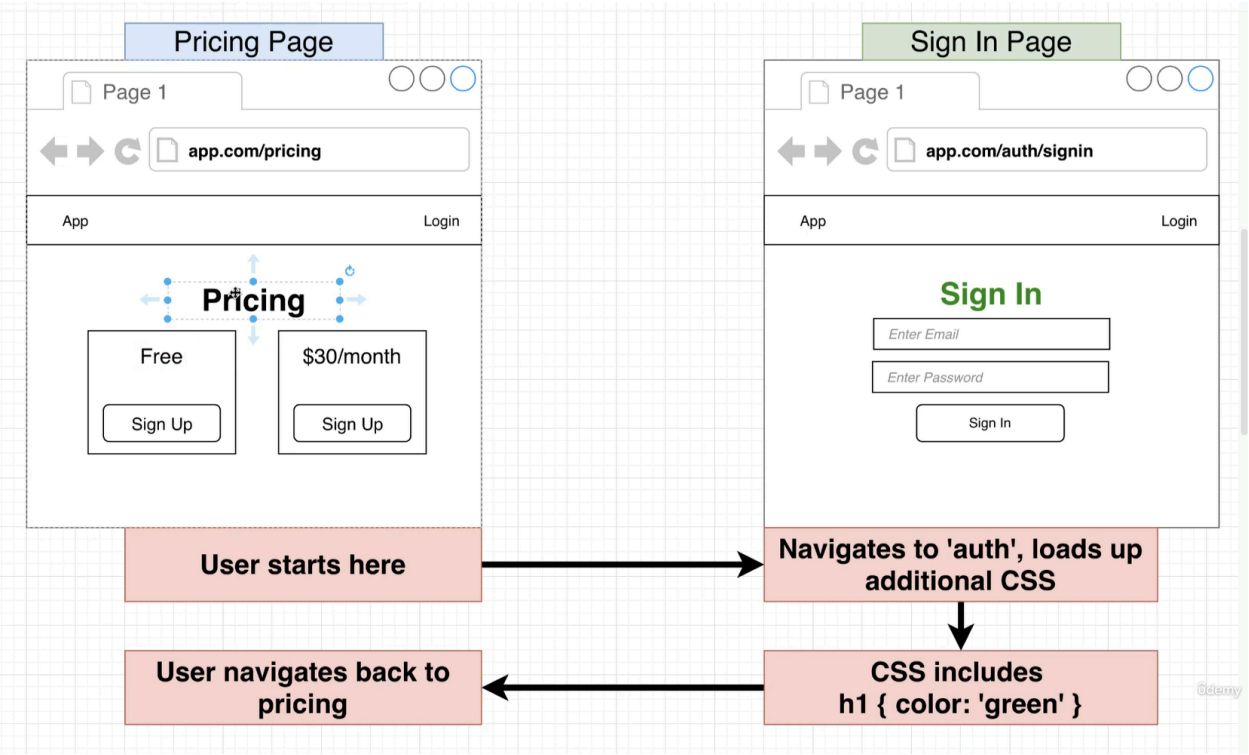

- In the above given scenario, when user navigates back to the previous page the loaded CSS properties are applied to that page also as it is a single page application and all the components and files are not reloaded.
- To solve this issue, there are multiple CSS scoping techniques.

CSS Scoping Techniques :

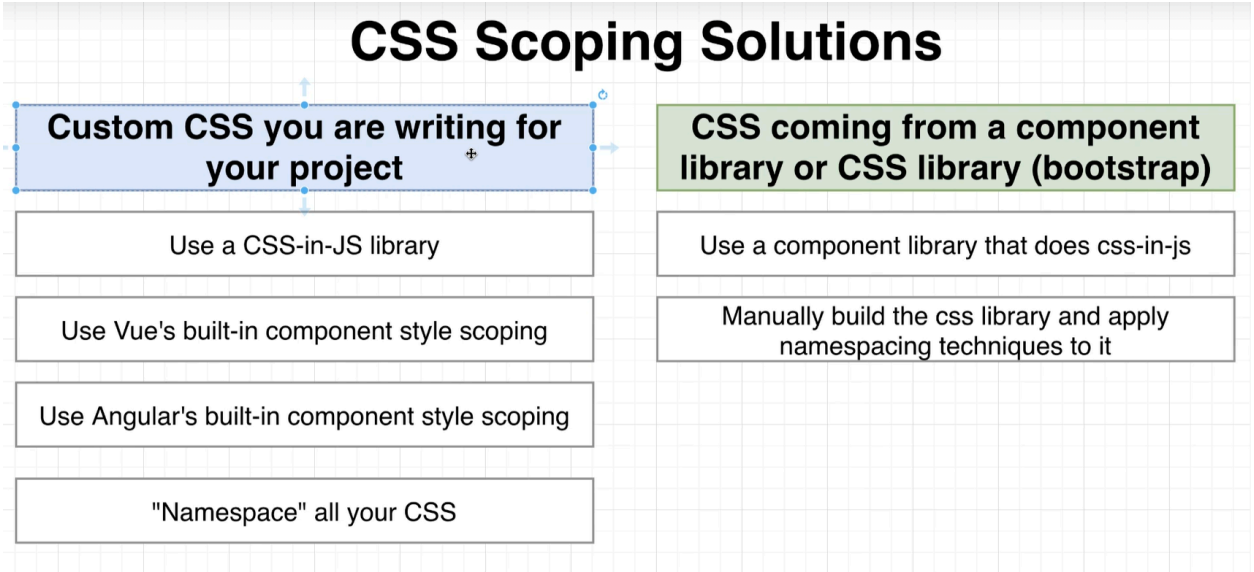

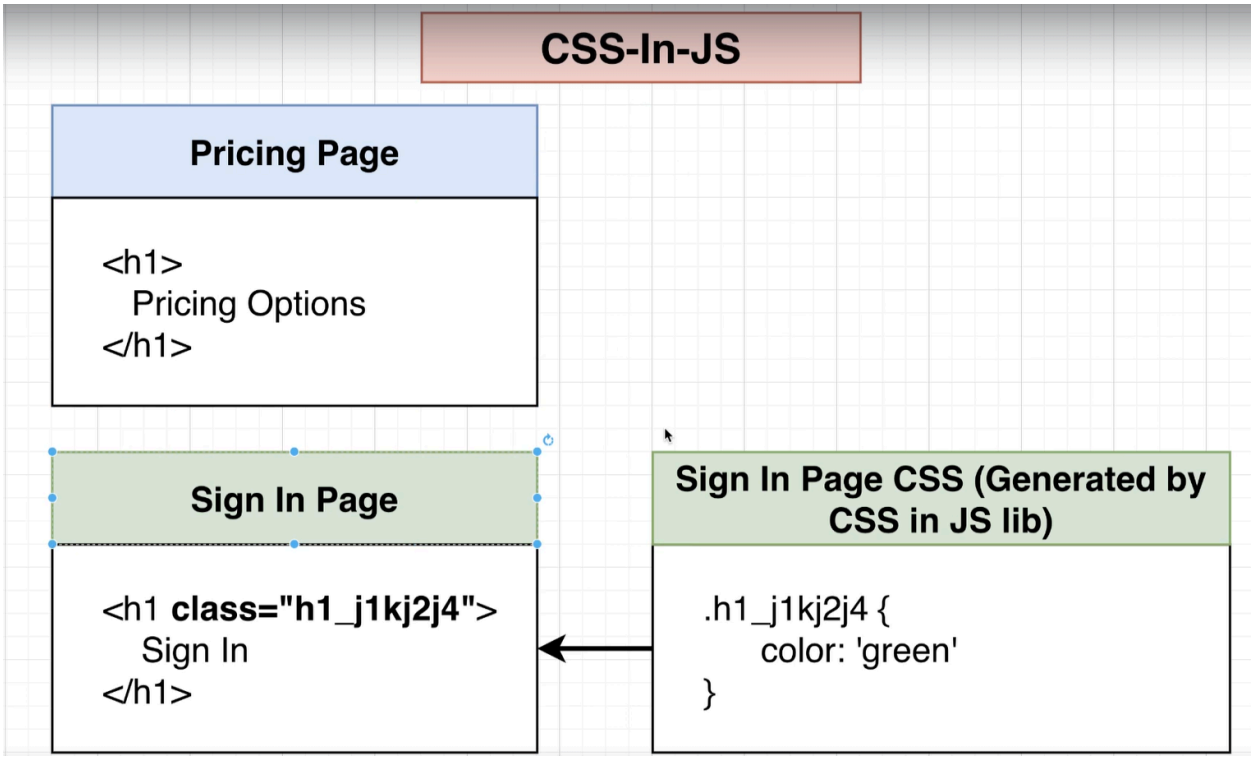

- A random component specific class name is generated by the library and applied so that it is not applied to elements of other components.

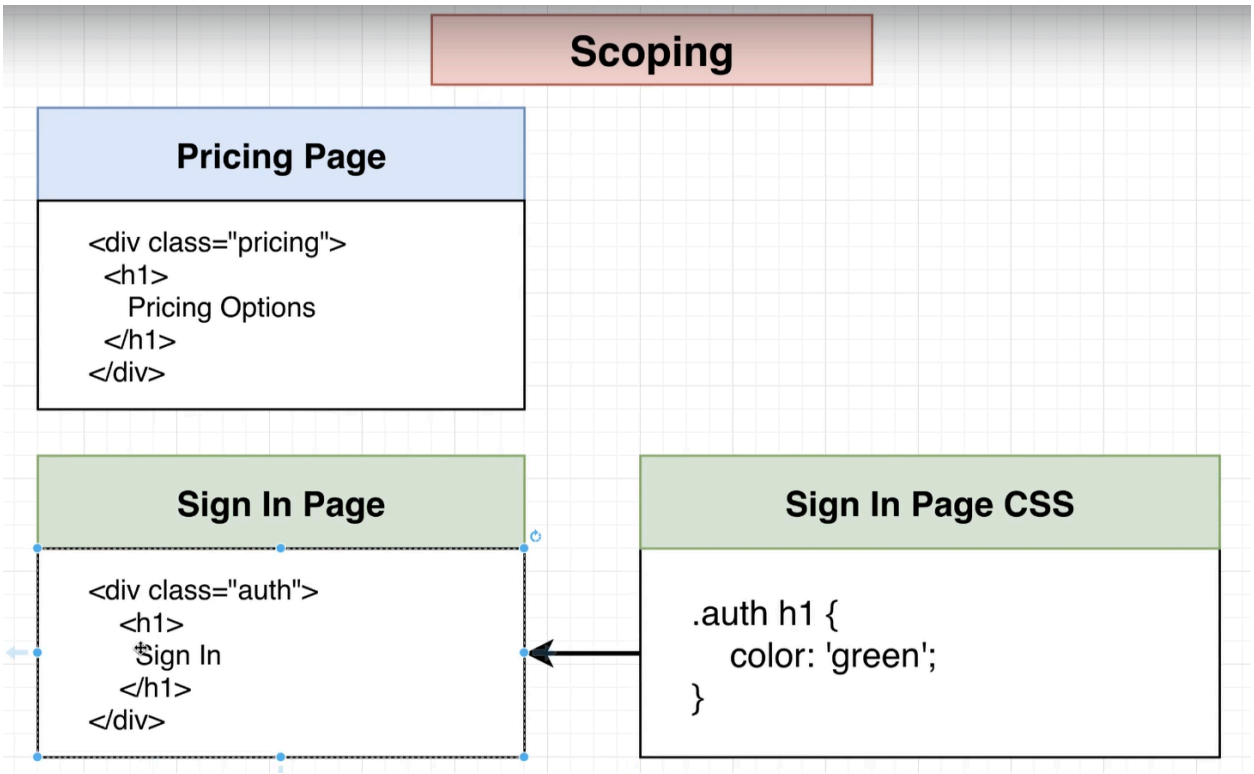

- Add a namespace div with class name for the component you want to apply CSS to and prepend the class name each time you are adding CSS to a particular selector of it.
- This technique may be useful as new engineers may not know and end up adding CSS without prepending namespace class.

Reason for breaking CSS in production :

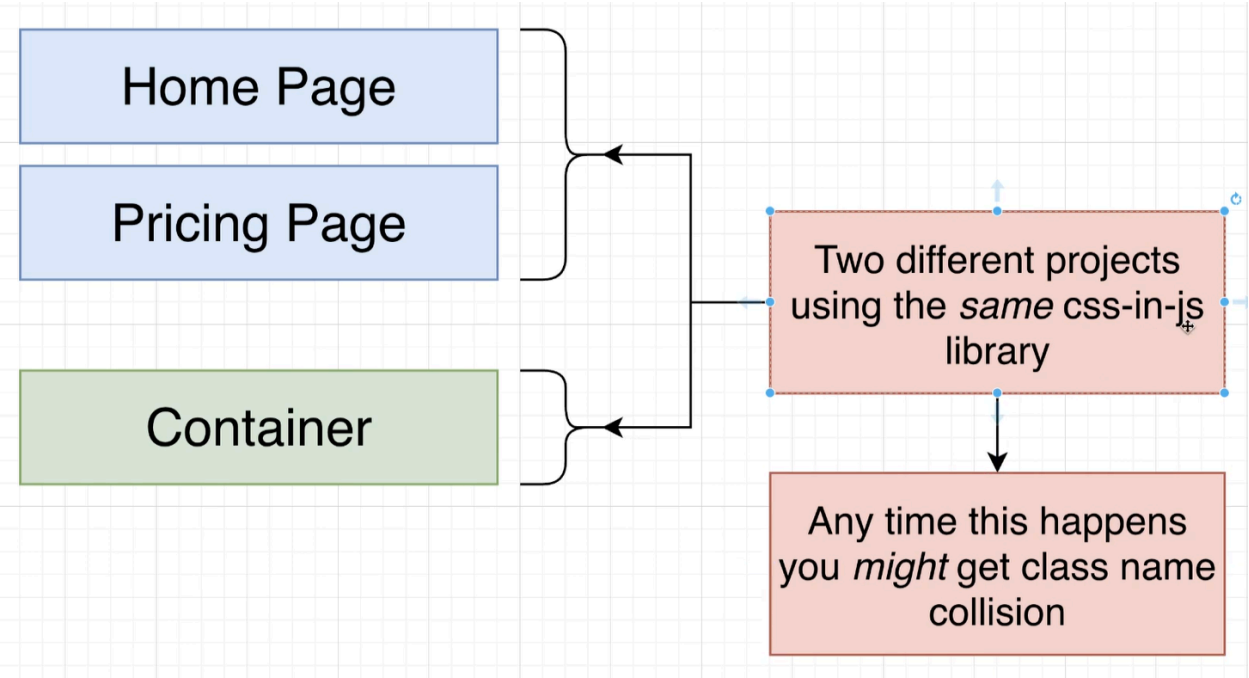
Home Page
Pricing Page
Container
Two different projects using the *same* css-in-js library
Any time this happens you *might* get class name collision

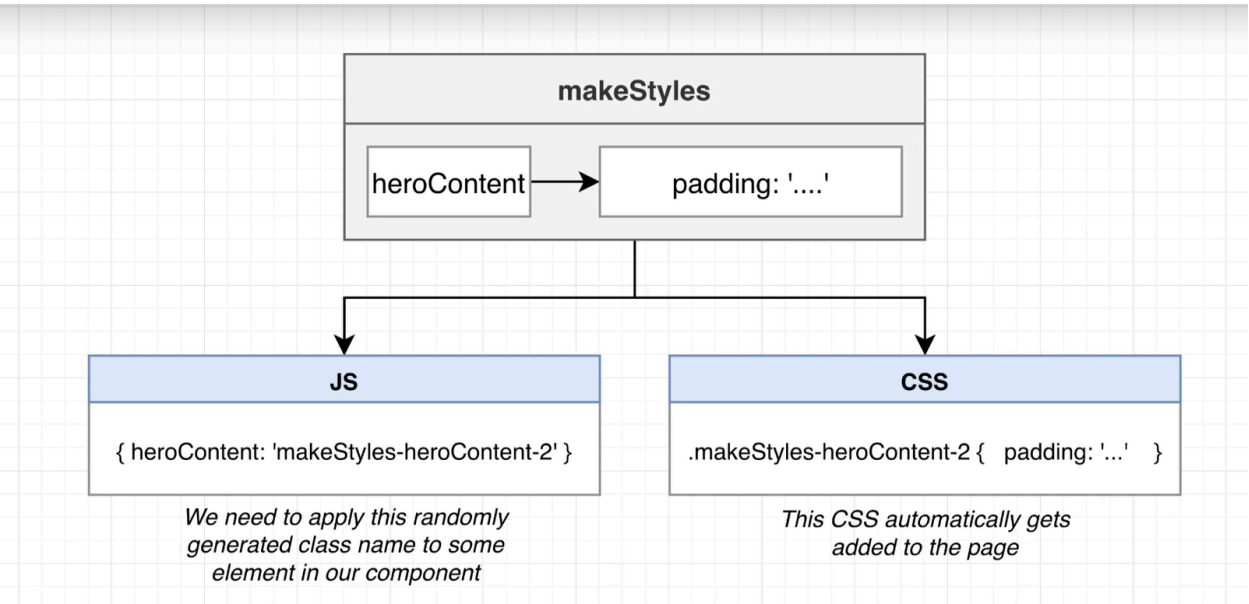
makeStyles
heroContent
padding: '....'
JS
{ heroContent: 'makeStyles-heroContent-2' }
We need to apply this randomly generated class name to some element in our component
CSS
.makeStyles-heroContent-2 { padding: '...' }
This CSS automatically gets added to the page

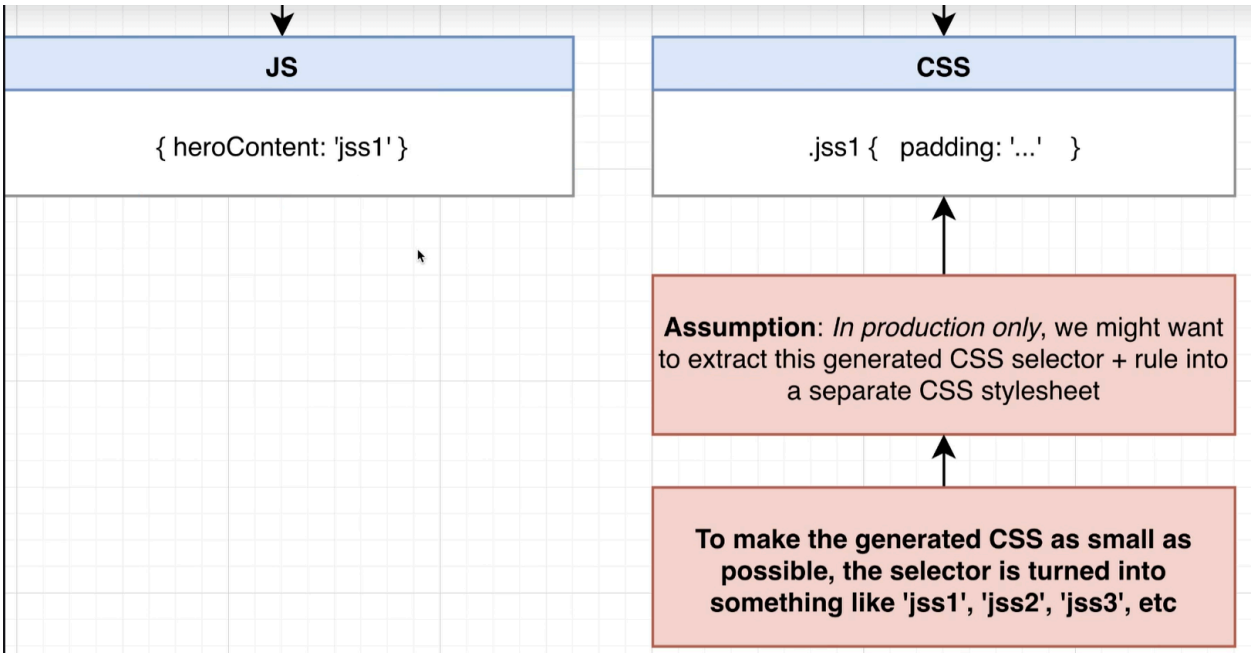

- Now all the microfrontends are building separately thus they both start up at jss1.

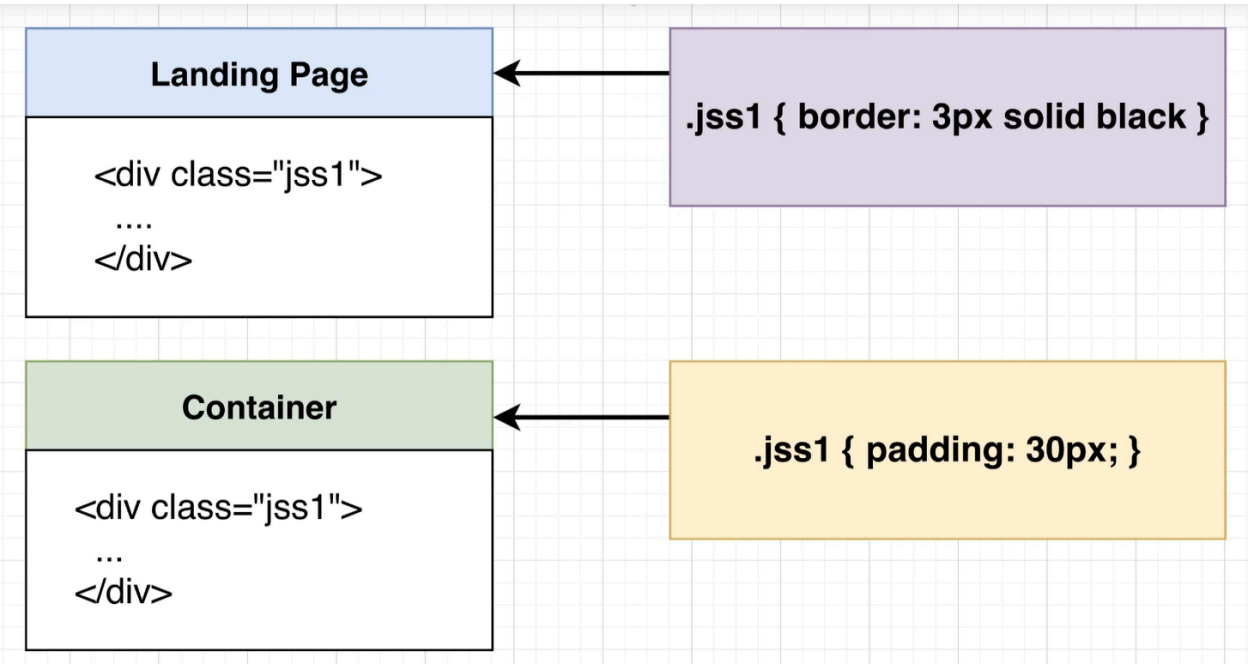

- There are some CSS-in-JS libraries where this issue may not occur as random names are generated for all microfrontends.