

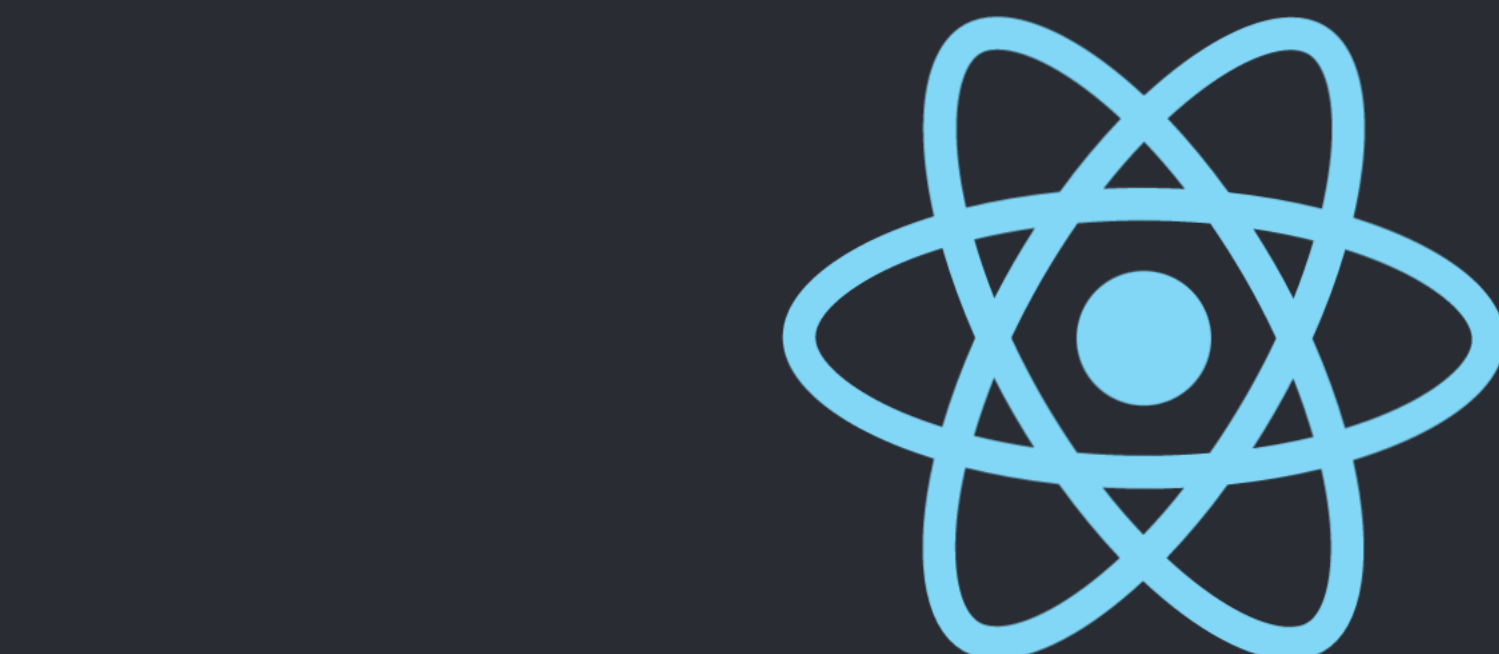


React App × +



Edit `src/App.js` and save to reload.

Learn React



```
<!DOCTYPE html>
<html lang="en">
  <head>...</head>
  <body>
    <noscript>You need to enable JavaScript to run this app.</noscript>
    <div id="root">
      <div class="App">
        <header class="App-header">...</header> flex == $0
      </div>
    </div>
  <!--
    This HTML file is a template.
    If you open it directly in the browser, you will see an empty page.

    You can add webfonts, meta tags, or analytics to this file.
    The build step will place the bundled scripts into the <body> tag.

    To begin the development, run `npm start` or `yarn start`.
    To create a production bundle, use `npm run build` or `yarn build`.
  -->
</body>
</html>
```

```
html  body  div#root  div.App  header.App-header
```

**Styles**   Computed   Layout   Event Listeners   DOM Breakpoints   Properties   >>

```
font-family: -apple-system, BlinkMacSystemFont, 'Segoe UI', 'Roboto', 'Oxygen',
    'Ubuntu', 'Cantarell', 'Fira Sans', 'Droid Sans', 'Helvetica Neue', sans-
    serif;
-webkit-font-smoothing: antialiased;
-moz-osx-font-smoothing: grayscale;
}
```

