



Exploratory residual pilot: matched comparisons, distinct baselines

Primary: 10,309 eligible origins

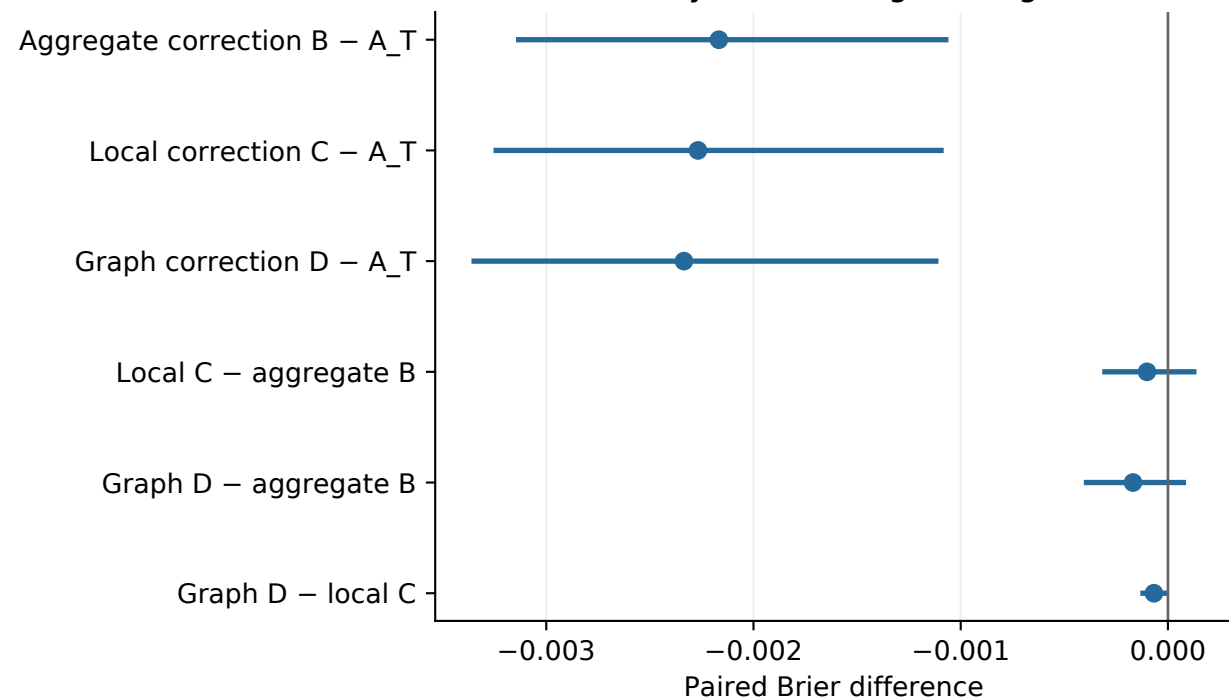

Historical panel: 127 eligible origins

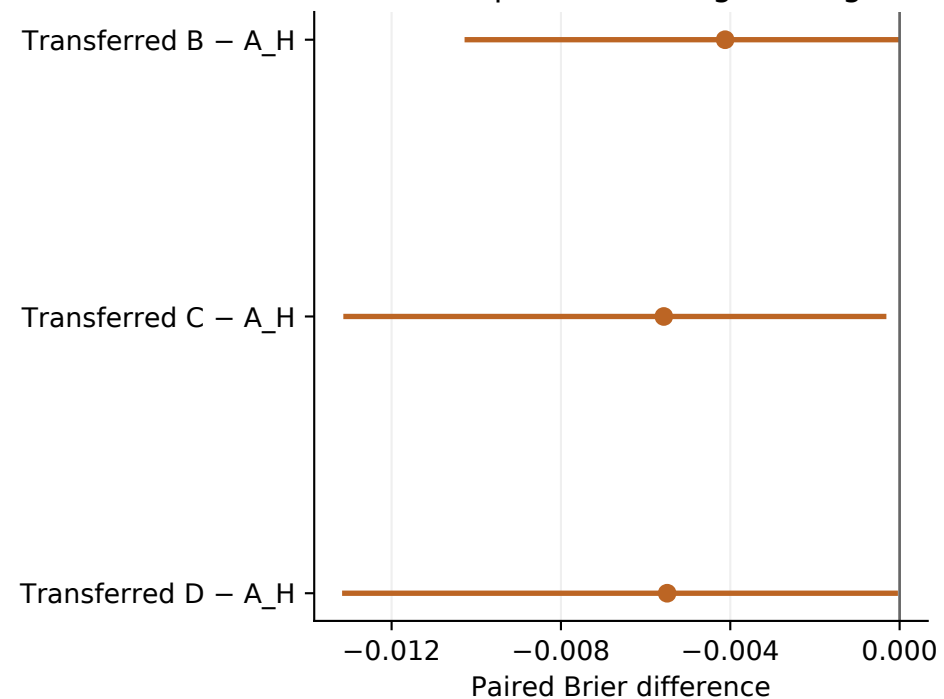

Intervals: 2,000 paired three-day-block resamples; mean seed loss, not an ensemble. Negative favors correction.
A_T is the temporal GPU baseline. A_H is the saved original baseline; transfer changes the corrector's baseline input.