

1 · A fable, an action request, two actual outputs

A: text → pre-extraction → fixed selection B: text + question → extraction


SOURCE EXCERPT · S1-S5; final speech S6 omitted here, supplied to model

- S1 A LION was awakened from sleep by a Mouse running over his face.
- S2 Rising up angrily, he caught him and was about to kill him, when the Mouse piteously entreated, saying: “If you would only spare my life, I would be sure to repay your kindness.”
- S3 The Lion laughed and let him go.
- S4 It happened shortly after this that the Lion was caught by some hunters, who bound him by strong ropes to the ground.
- S5 The Mouse, recognizing his roar, came and gnawed the rope with his teeth, and set him free, exclaiming:

REQUEST · Physical running, capture, binding, gnawing and release


A · selected pre-extraction

6 of 8 records shown

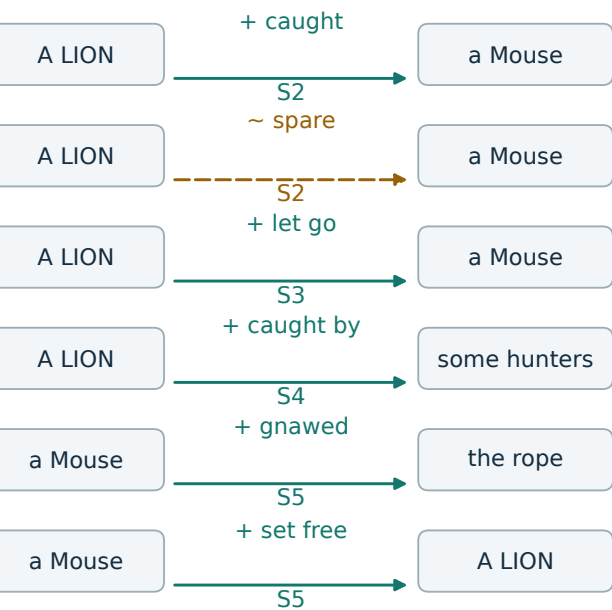

B · contextual extraction

All 5 records shown

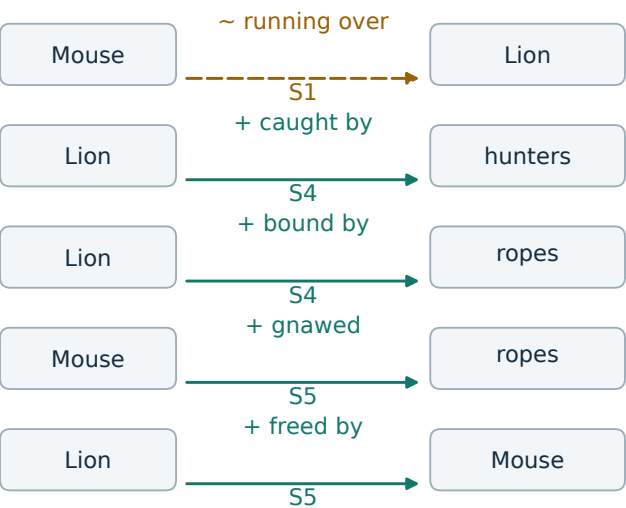

A's spare loses conditional scope (and has a missing valid_until key). B omits the Lion's early capture and release of the Mouse. No missing edge is drawn.

+ supported ~ partial Facets repeat exact names; no identity repair.