

## 2 · Source validity is not the query window

A: fixed selection from pre-extraction    B: independent contextual extraction


**SOURCE SUBSET · 4 of 14 sentences shown; both methods received all 14**

- S5** Lena is in North Hall from day 1 up to but not including day 5.
- S6** Omar is in East Garden from day 0 up to but not including day 3.
- S7** Priya is in Stone Shed from day 3 up to but not including day 6.
- S8** Silver Flute is in West Pier from day 2 up to but not including day 4.

**REQUEST · Direct locations overlapping day [2, 4); preserve full bounds**


**A · all 4 selected records**

**B · 4 of 6 records below**

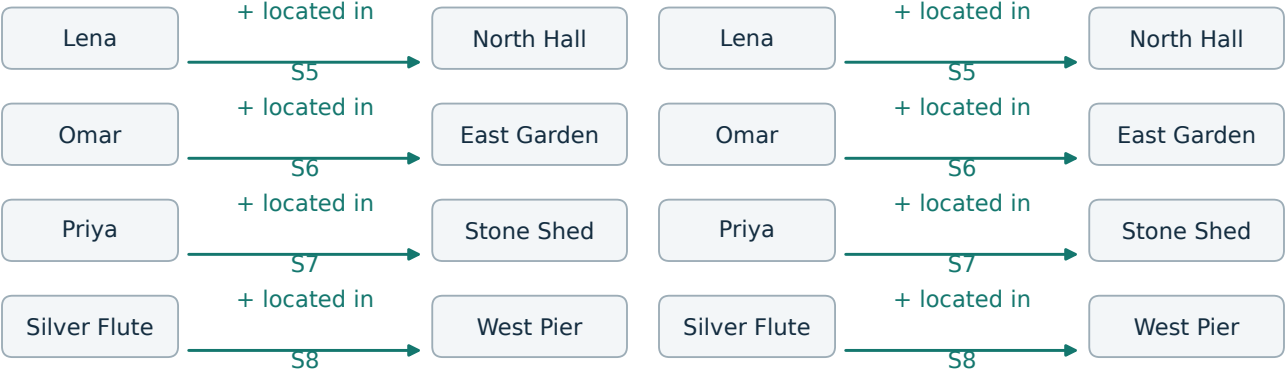

I B also returns Priya → carries → Cobalt Compass [0, 6), S3; Lena → carries → Amber Lantern [1, 5), S4.  
Supported but irrelevant: counted, not hidden errors.

**Generated intervals · identical in A and B location records**

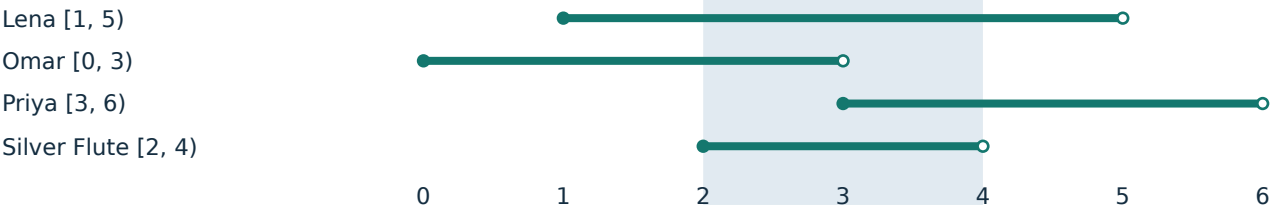

+ supported    I irrelevant    Shading: query [2, 4); ○ excludes endpoint.