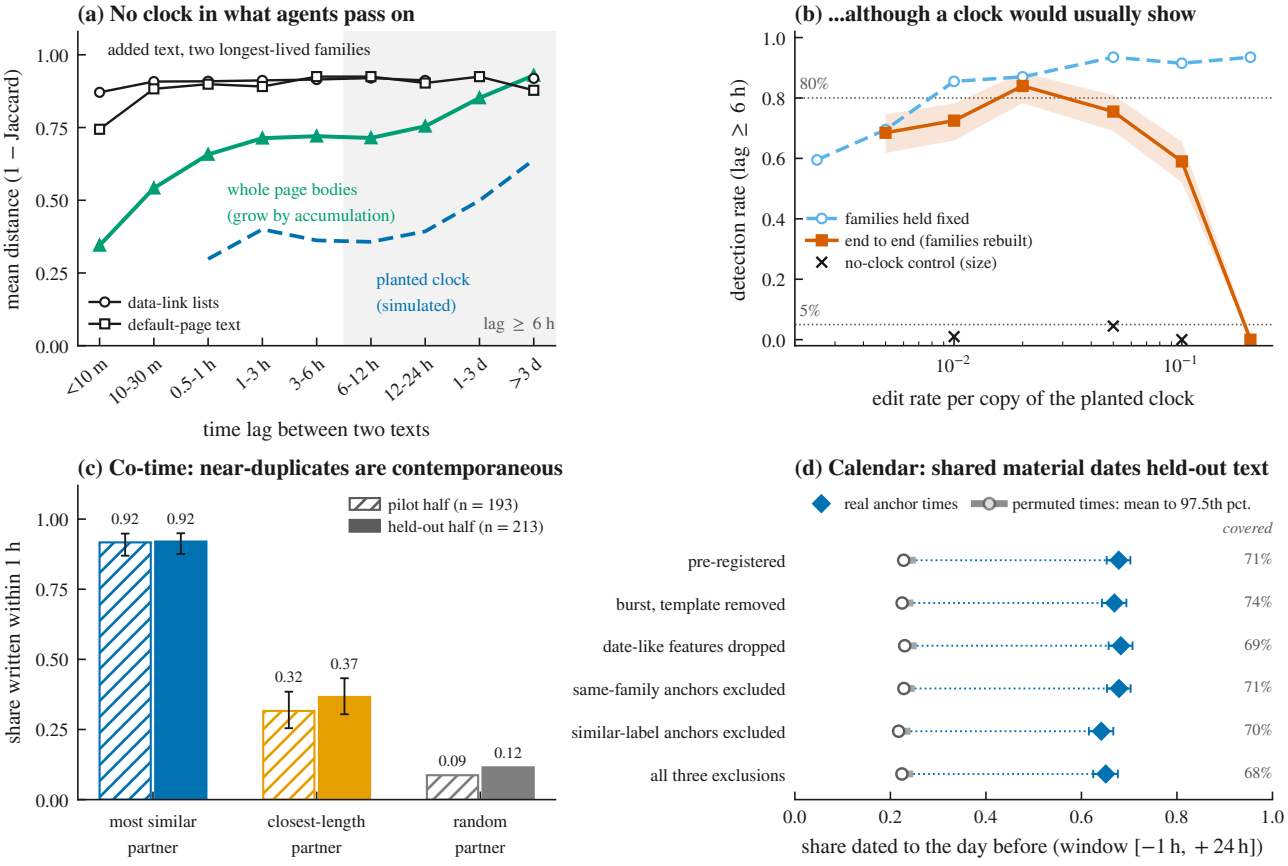
(a) No clock in what agents pass on
added text, two longest-lived families
mean distance (1 − Jaccard)
1.00
0.75
0.50
0.25
0.00
whole page bodies
(grow by accumulation)
planted clock
(simulated)
lag ≥ 6 h
data-link lists
default-page text
<10 m
10-30 m
0.5-1 h
1-3 h
3-6 h
6-12 h
12-24 h
1-3 d
>3 d
time lag between two texts
(b) ...although a clock would usually show
detection rate (lag ≥ 6 h)
1.0
0.8
0.6
0.4
0.2
0.0
80%
5%
families held fixed
end to end (families rebuilt)
no-clock control (size)
10−2
10−1
edit rate per copy of the planted clock
(c) Co-time: near-duplicates are contemporaneous
share written within 1 h
1.00
0.75
0.50
0.25
0.00
pilot half (n = 193)
held-out half (n = 213)
0.92
0.92
0.32
0.37
0.09
0.12
most similar partner
closest-length partner
random partner
(d) Calendar: shared material dates held-out text
real anchor times
permuted times: mean to 97.5th pct.
covered
pre-registered
71%
burst, template removed
74%
date-like features dropped
69%
same-family anchors excluded
71%
similar-label anchors excluded
70%
all three exclusions
68%
0.0
0.2
0.4
0.6
0.8
1.0
share dated to the day before (window [−1 h, + 24 h])