


PRACTICAL 6:

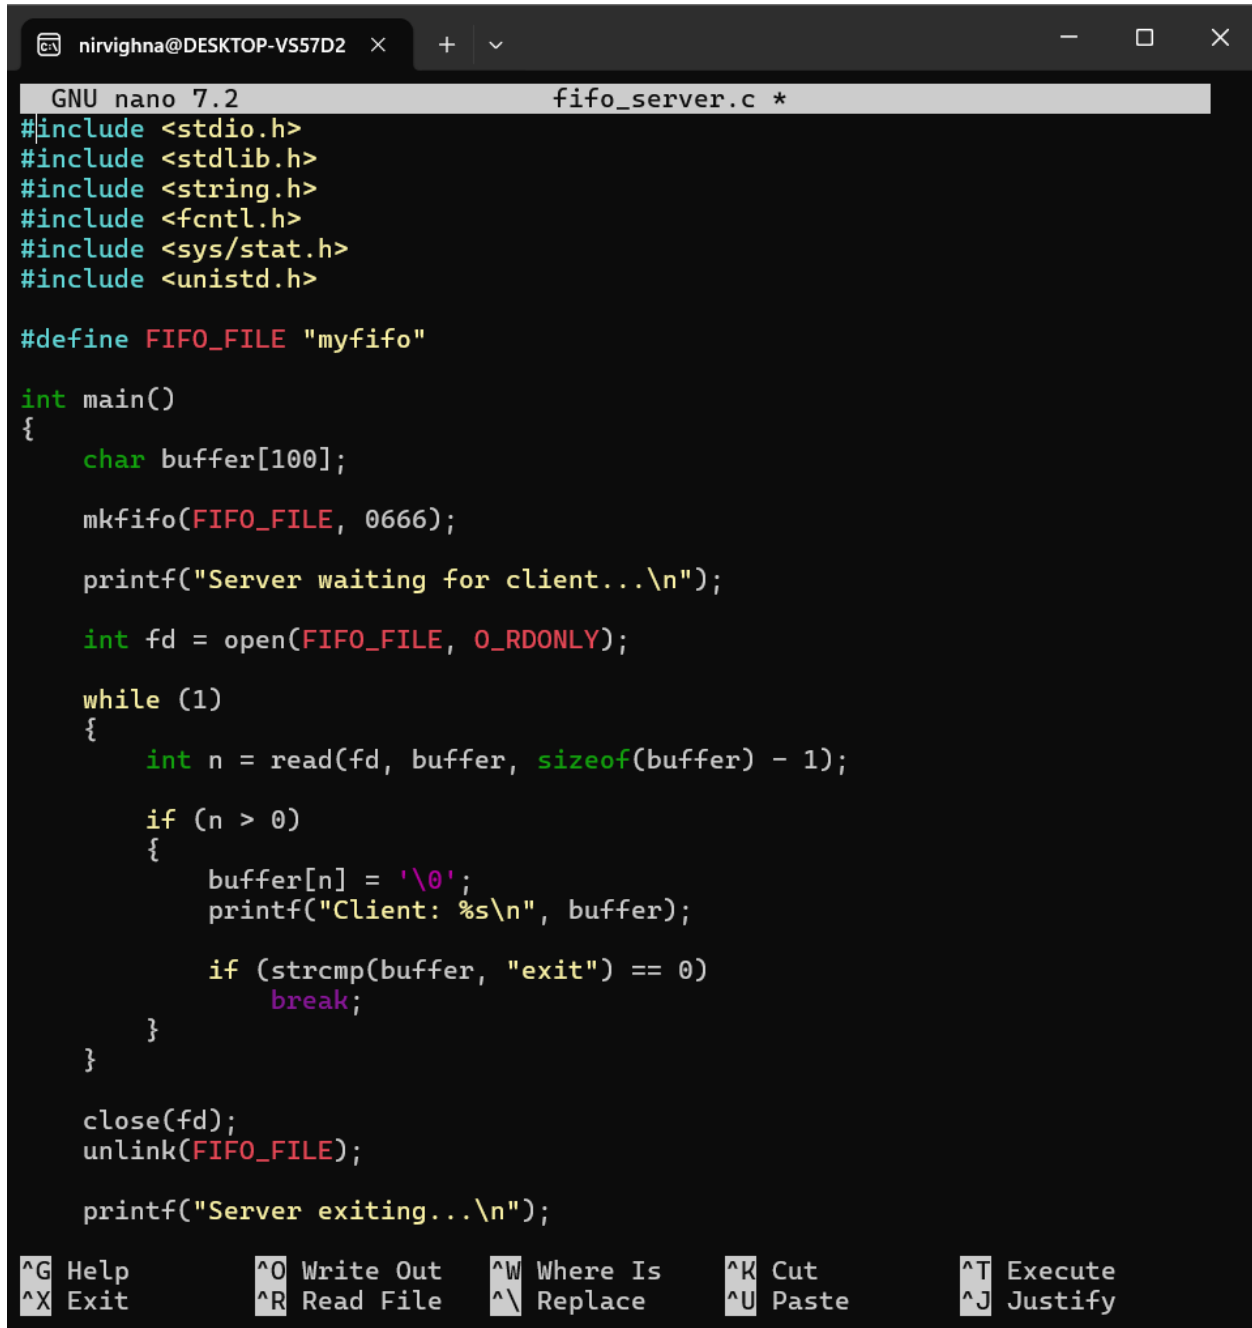

```
GNU nano 7.2 fifo_server.c *
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <fcntl.h>
#include <sys/stat.h>
#include <unistd.h>

#define FIFO_FILE "myfifo"

int main()
{
    char buffer[100];

    mkfifo(FIFO_FILE, 0666);

    printf("Server waiting for client...\n");

    int fd = open(FIFO_FILE, O_RDONLY);

    while (1)
    {
        int n = read(fd, buffer, sizeof(buffer) - 1);

        if (n > 0)
        {
            buffer[n] = '\0';
            printf("Client: %s\n", buffer);

            if (strcmp(buffer, "exit") == 0)
                break;
        }
    }

    close(fd);
    unlink(FIFO_FILE);

    printf("Server exiting...\n");
}
```

 G Help	 Write Out	 Where Is	 Cut	 Execute
 Exit	 Read File	 Replace	 Paste	 Justify

```
nirvighna@DESKTOP-VS57D2  ×  +  ▾
GNU nano 7.2                                fifo_client.c *
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <fcntl.h>
#include <unistd.h>

#define FIFO_FILE "myfifo"

int main()
{
    char message[100];

    int fd = open(FIFO_FILE, O_WRONLY);

    printf("Connected to server.\n");

    while (1)
    {
        printf("Enter message: ");
        fgets(message, sizeof(message), stdin);

        message[strcspn(message, "\n")] = '\0';

        write(fd, message, strlen(message) + 1);

        if (strcmp(message, "exit") == 0)
            break;
    }

    close(fd);

    return 0;
}

^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute
^X Exit      ^R Read File  ^\ Replace    ^U Paste      ^J Justify
```

```
nirvighna@DESKTOP-VS57D2I:~$ nano fifo_server.c
nirvighna@DESKTOP-VS57D2I:~$ gcc fifo_server.c -o fifo_server
nirvighna@DESKTOP-VS57D2I:~$ nano fifo_client.c
nirvighna@DESKTOP-VS57D2I:~$ gcc fifo_client.c -o fifo_client
nirvighna@DESKTOP-VS57D2I:~$ ./fifo_server
Server waiting for client...
```