
QUERY 1: Retrieve all Students:

```sql
CREATE DATABASE IF NOT EXISTS CollegeRB;
USE CollegeRB;
CREATE TABLE STUDENTS(
    student_id INT PRIMARY KEY,
    student_name VARCHAR(50),
    course_id INT,
    marks INT
);
INSERT INTO STUDENTS
(student_id, student_name, course_id, marks)
VALUES
(61, 'Manya', 1, 90),
(73, 'Navya', 2, 85),
(74, 'Neha', 3, 80),
(106, 'Spoorthi', 4, 88),
(116, 'Varshitha', 5, 89),
(111, 'Tanisha', 6, 91);
SELECT * FROM STUDENTS;
```

OUTPUT:

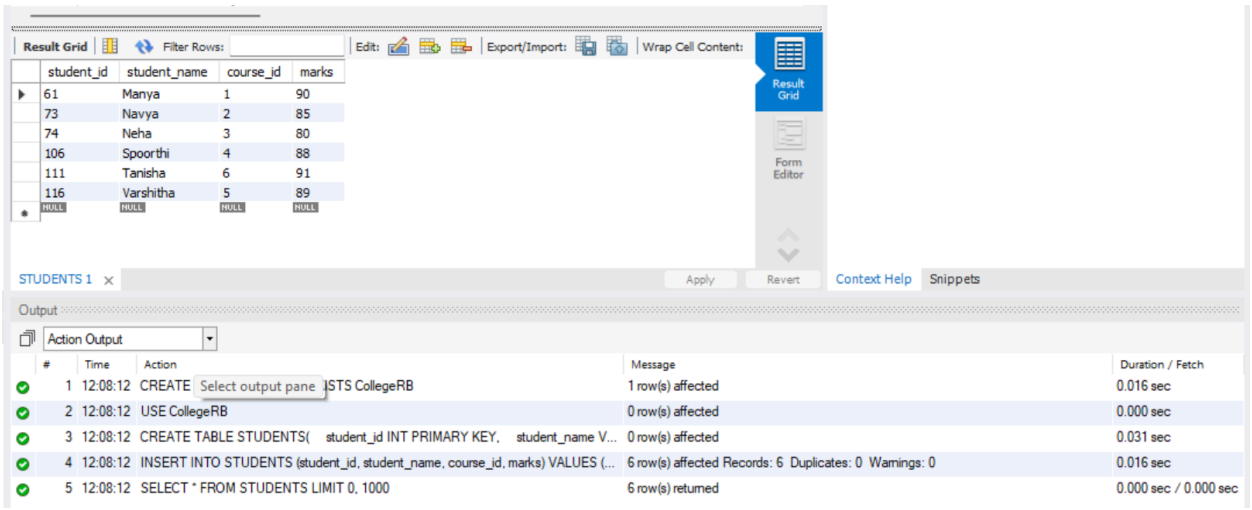

student_id	student_name	course_id	marks
61	Manya	1	90
73	Navya	2	85
74	Neha	3	80
106	Spoorthi	4	88
111	Tanisha	6	91
116	Varshitha	5	89
NULL	NULL	NULL	NULL


#	Time	Action	Message	Duration / Fetch
1	12:08:12	CREATE ...STS CollegeRB	1 row(s) affected	0.016 sec
2	12:08:12	USE CollegeRB	0 row(s) affected	0.000 sec
3	12:08:12	CREATE TABLE STUDENTS(student_id INT PRIMARY KEY, student_name V...	0 row(s) affected	0.031 sec
4	12:08:12	INSERT INTO STUDENTS (student_id, student_name, course_id, marks) VALUES (...	6 row(s) affected Records: 6 Duplicates: 0 Warnings: 0	0.016 sec
5	12:08:12	SELECT * FROM STUDENTS LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec

Query 2: Retrieve selected columns

```sql
CREATE DATABASE IF NOT EXISTS CollegeRB;
USE CollegeRB;
DROP TABLE IF EXISTS STUDENTS;
CREATE TABLE STUDENTS
(
    student_id INT PRIMARY KEY,
    student_name VARCHAR(50),
    course_id INT,
    marks INT
);

INSERT INTO STUDENTS
(student_id, student_name, course_id, marks)
VALUES
(61, 'Manya', 1, 90),
(73, 'Navya', 2, 85),
(74, 'Neha', 3, 80),
(106, 'Spoorthi', 4, 88),
(116, 'Varshitha', 5, 89),
(111, 'Tanisha', 6, 91);
SELECT student_name, marks
FROM STUDENTS;
```


OUTPUT:

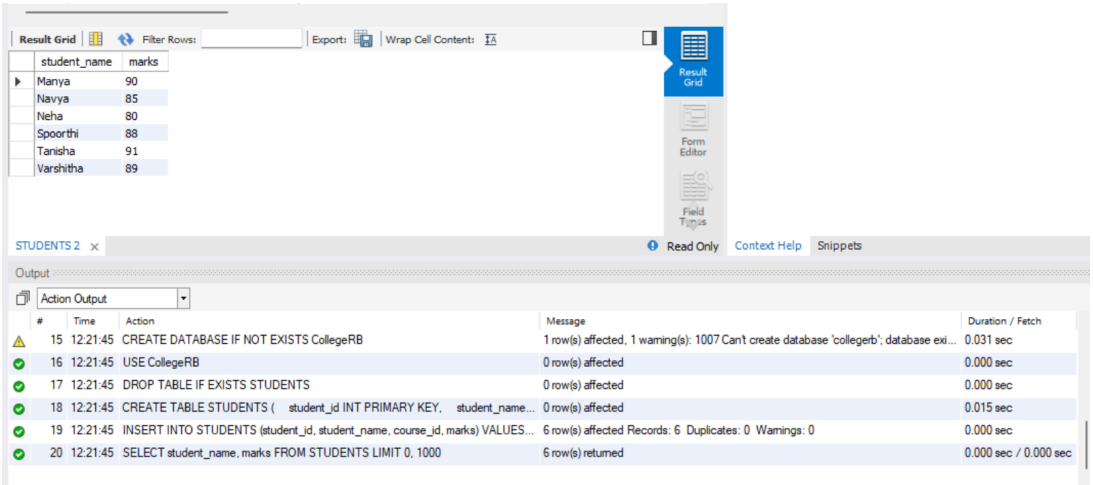

student_name	marks
Manya	90
Navya	85
Neha	80
Spoorthi	88
Tanisha	91
Varshitha	89

#	Time	Action	Message	Duration / Fetch
15	12:21:45	CREATE DATABASE IF NOT EXISTS CollegeRB	1 row(s) affected, 1 warning(s): 1007 Can't create database 'collegerb'; database exi...	0.031 sec
16	12:21:45	USE CollegeRB	0 row(s) affected	0.000 sec
17	12:21:45	DROP TABLE IF EXISTS STUDENTS	0 row(s) affected	0.000 sec
18	12:21:45	CREATE TABLE STUDENTS (student_id INT PRIMARY KEY, student_name...	0 row(s) affected	0.015 sec
19	12:21:45	INSERT INTO STUDENTS (student_id, student_name, course_id, marks) VALUES...	6 row(s) affected Records: 6 Duplicates: 0 Warnings: 0	0.000 sec
20	12:21:45	SELECT student_name, marks FROM STUDENTS LIMIT 0, 1000	6 row(s) returned	0.000 sec / 0.000 sec


Query 3: Find students scoring more than 80

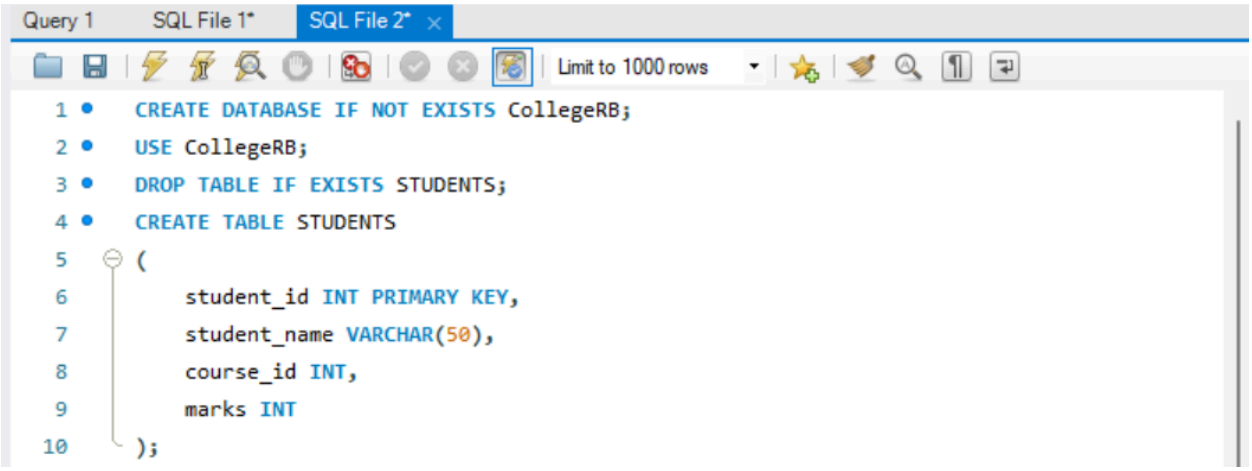


```sql
CREATE DATABASE IF NOT EXISTS CollegeRB;
USE CollegeRB;
DROP TABLE IF EXISTS STUDENTS;
CREATE TABLE STUDENTS
(
    student_id INT PRIMARY KEY,
    student_name VARCHAR(50),
    course_id INT,
    marks INT
);
```

```sql
INSERT INTO STUDENTS
(student_id, student_name, course_id, marks)
VALUES
(61, 'Manya', 1, 90),
(73, 'Navya', 2, 85),
(74, 'Neha', 3, 80),
(106, 'Spoorthi', 4, 88),
(116, 'Varshitha', 5, 89),
(111, 'Tanisha', 6, 91);
SELECT student_id, student_name, course_id, marks
FROM STUDENTS
WHERE marks > 80;
```

OUTPUT:

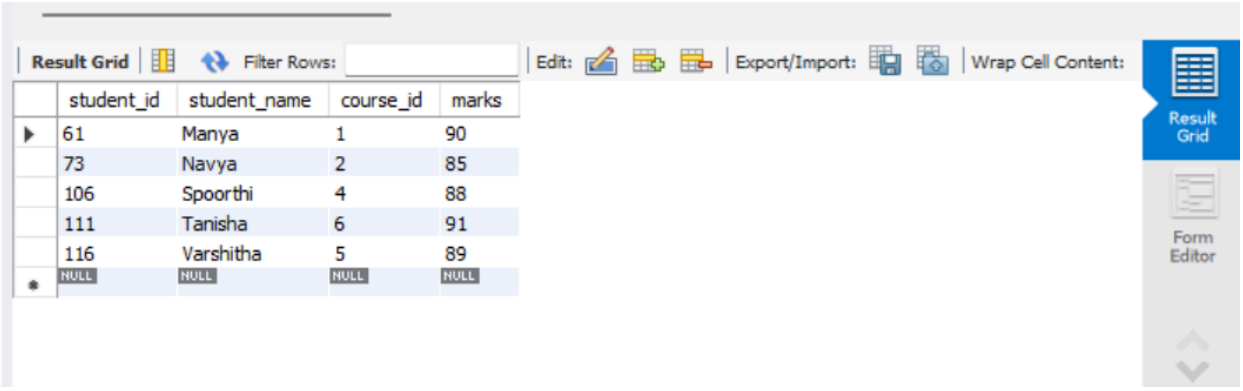


student_id	student_name	course_id	marks
61	Manya	1	90
73	Navya	2	85
106	Spoorthi	4	88
111	Tanisha	6	91
116	Varshitha	5	89
NULL	NULL	NULL	NULL

Query 4: Find CSE students

```sql
CREATE DATABASE IF NOT EXISTS CollegeRB;
USE CollegeRB;
DROP TABLE IF EXISTS STUDENTS;
CREATE TABLE STUDENTS
(
    student_id INT PRIMARY KEY,
    student_name VARCHAR(50),
    course_id INT,
    marks INT
);
```

```sql
INSERT INTO STUDENTS
(student_id, student_name, course_id, marks)
VALUES
(61, 'Manya', 1, 90),
(73, 'Navya', 2, 85),
(74, 'Neha', 3, 80),
(106, 'Spoorthi', 4, 88),
(116, 'Varshitha', 5, 89),
(111, 'Tanisha', 6, 91);
SELECT student_id, student_name, course_id, marks
FROM STUDENTS
WHERE course_id = 1;
```

OUTPUT:

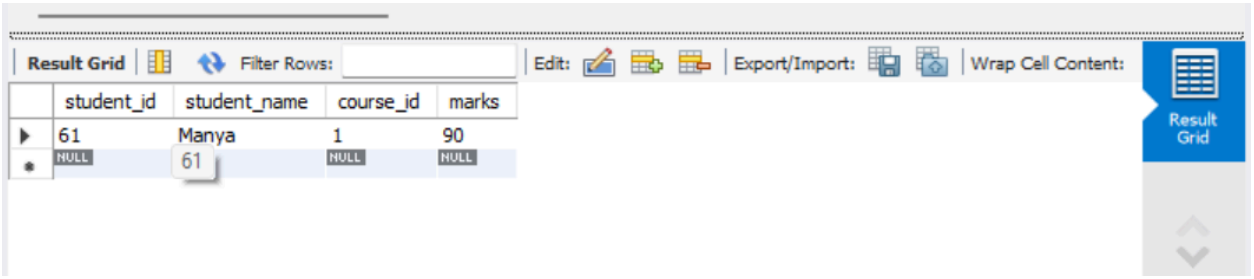


student_id	student_name	course_id	marks
61	Manya	1	90
NULL	61	NULL	NULL

Query 5: Find students from Delhi who scored above 80


```sql
CREATE DATABASE IF NOT EXISTS CollegeRB;
USE CollegeRB;
DROP TABLE IF EXISTS STUDENTS;
CREATE TABLE STUDENTS
(
    student_id INT PRIMARY KEY,
    student_name VARCHAR(50),
    course_id INT,
    marks INT
);
INSERT INTO STUDENTS
(student_id, student_name, course_id, marks)
VALUES
(61, 'Manya', 1, 90),
(73, 'Navya', 2, 85),
(74, 'Neha', 3, 80),
(106, 'Spoorthi', 4, 88),
(116, 'Varshitha', 5, 89),
(111, 'Tanisha', 6, 91);
SELECT *
FROM STUDENTS
WHERE course_id = 4 AND marks > 80;
```

OUTPUT:

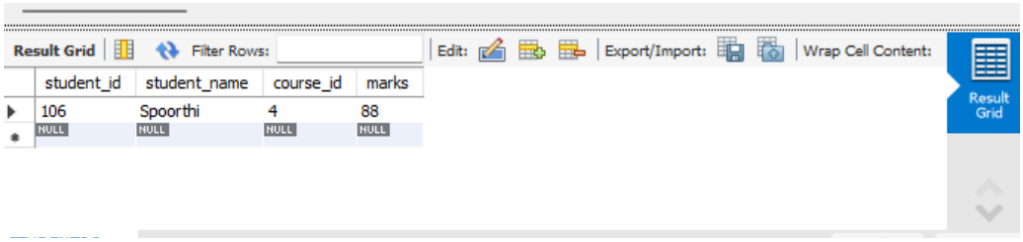

student_id	student_name	course_id	marks
106	Spoorthi	4	88
NULL	NULL	NULL	NULL


Query 6: Find the highest marks

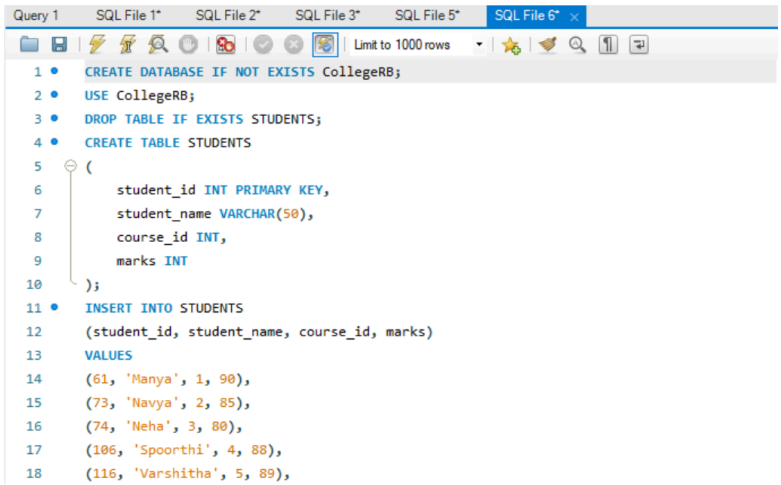


```sql
CREATE DATABASE IF NOT EXISTS CollegeRB;
USE CollegeRB;
DROP TABLE IF EXISTS STUDENTS;
CREATE TABLE STUDENTS
(
    student_id INT PRIMARY KEY,
    student_name VARCHAR(50),
    course_id INT,
    marks INT
);
INSERT INTO STUDENTS
(student_id, student_name, course_id, marks)
VALUES
(61, 'Manya', 1, 90),
(73, 'Navya', 2, 85),
(74, 'Neha', 3, 80),
(106, 'Spoorthi', 4, 88),
(116, 'Varshitha', 5, 89),
```


```
18      (116, 'Varshitha', 5, 89),
19      (111, 'Tanisha', 6, 91);
20 •    SELECT MAX(marks) AS Highest_Marks
21      FROM STUDENTS;
```

OUTPUT:

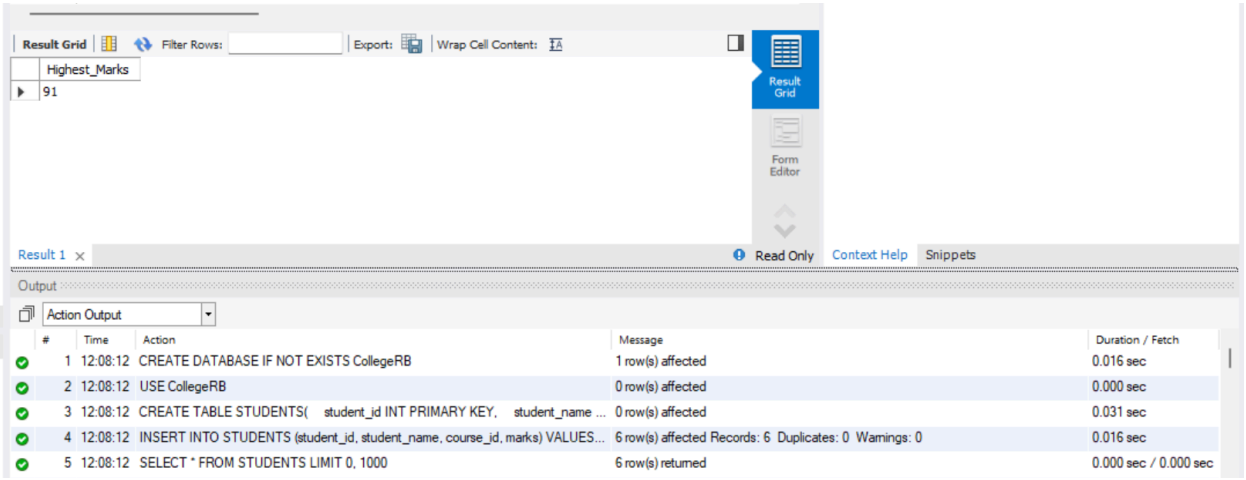


Query 7: Find the average marks

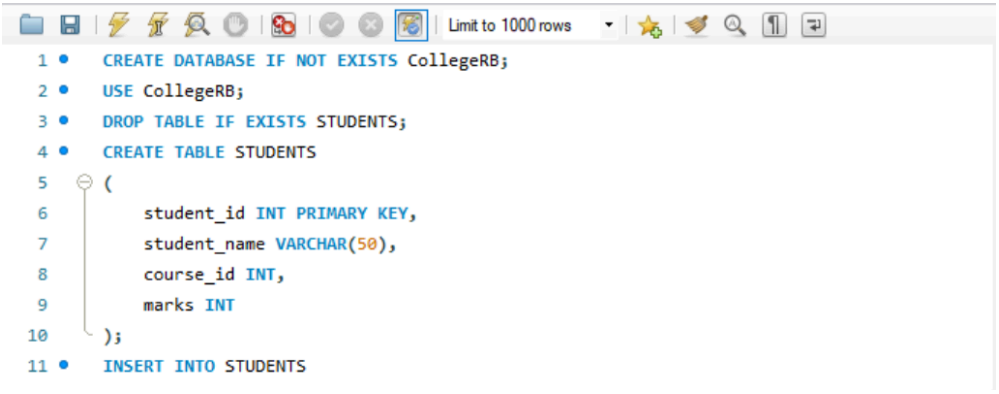

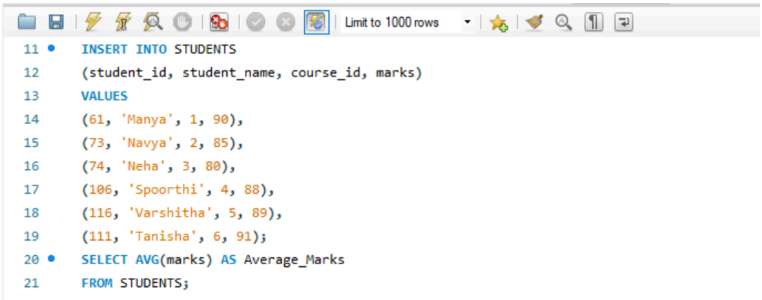

OUTPUT:

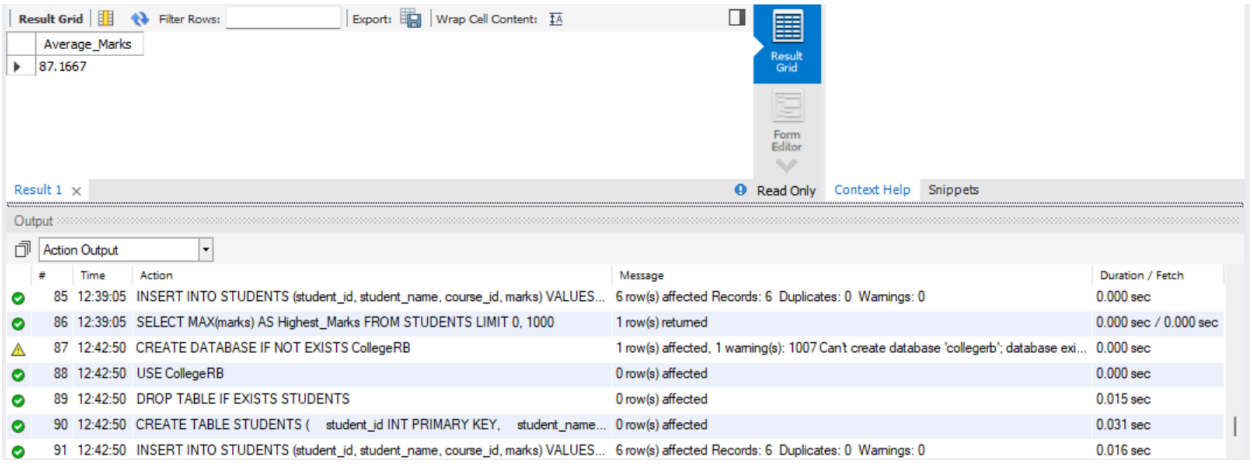

Github:
https://github.com/manyappoojarybca25-byte/Dbms.git