


St	Vorkommen	Element
		Daamanaa
		Response
M	1 1	└── xsd:choice
M	1 1	Exception
M	1 1	☐ xsd:sequence
0	0 unbounded	ExceptionDetail
M	required	ServiceParticipant
M	required	— DomainName
M	required	─ ServiceName
M	required	- Version
M M	required required	— Operation — ExceptionClass
M	required	- ExceptionID
M	required	- ExceptionText
M	required	— CAT_Severity
M	required	hasBeenLogged
O	optional	- LogTargetList
M	1 1	xsd:sequence
0	0 unbounded	Reference
М	1 1	LangetOrderResponse
O	optional	- codeTableVersion
M	required	- version
0	optional	- testcase
M	1 1	T xsd:sequence
М	1 1	⊤ Return
M	1 1	xsd:sequence
M	1 1	- ReturnCode
0	0 unbounded	L _T ErrMsg
M	1 1	xsd:sequence
0	0 1	- ErrDateTime
0	0 1	- ErrCat
M	1 1	─ ErrCode
0	0 1	└─ ErrDesc
M	1 1	├ MsgHeader
M	1 1	xsd:sequence
0	0 1	─ MsgFormat
M	1 1	├─ MsgID
0	0 1	- ODOCID
M	1 1	CreationDateTime
M	1 1	Receiver
0	0 1	- CommunicationPartner
0	0 1	Origin
M	1 1	☐ xsd:sequence
M	1 1	─ SystemName
0	0 1	SystemVersion
0	0 1	CertificationDate
0	0 1	☐ FreeText
0	0 1	OrderHeader
0	optional 	- includesDestinations
0	optional	- includesPackaging
M	1 1	xsd:sequence
0	0 1	- ProductionState
0	0 1	├─ ChangedAt

St = Status: M=Mandatory (Pflicht), O=Optional



	St	Vorkommen	Element
M	<u></u>	VOIKOIIIIIEII	Liement
Complement Com			
O 0			
O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 unbounded O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 unbounded M 1 1 M required O optional O 0 unbounded M 1 1 O 0 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O			111 1911
O		-	
O 0 1 O 0	_	*	
O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 unbounded O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1 O 0 unbounded M 1 1 O 0 1		*	
CreationDate O	_	*	
SubmissionType		*	
O 0		•	
O 0 1 OrderCategory O 0 unbounded O 0 unbounded M 1 1 CustOrderID Xed Sequence O 0 unbounded M 1 1 SystemName SystemID O 0 unbounded M 1 1 CustOrderID Xed Sequence CustID SystemName SystemID TotalAmount Value CustOrderID Xed Sequence O optional CustOrderID Xed Sequence O currency CustOrderID Xed Sequence OrderCategory OrderCategory OrderID Xed Sequence CustID SystemName SystemID CustOrderID Xed Sequence OrderID CustOrderID Xed Sequence OrderID CustOrderID Xed Sequence OrderID CustOrderID Xed Sequence OrderID TotalAmount Value CustOrderID Xed Sequence OrderID CustOrderID Xed Sequence OrderID TotalAmount Value CustOrderID Xed Sequence OrderID CustOrderID Xed Sequence OrderID TotalAmount Value CustOrderID Xed Sequence OrderID TotalAmount Value CustOrderID Xed Sequence OrderID TotalAmount Value CustOrderID Xed Sequence CustID Name CustOrderID TotalAmount Value		-	
O 0 unbounded O 0 unbounded M 1 1 CustDrderID SystemQuired CustID SystemName SystemID TotalAmount Value Currency CustID SystemName SystemID TotalAmount Value Currency CustOrderID SystemName SystemID TotalAmount Value Currency CustID SystemName SystemID TotalAmount Value Currency CustID SystemName SystemID TotherAttribute SystemID TotherAttribute SystemID TotherAttribute SystemID TotherAttribute SystemName SystemID TotalAmount SystemID SystemS		*	
O 0 I	0	0 unbounded	
M	0	0 1	
M	0	0 unbounded	☐ CustOrderID
SystemName Sys	M		
Name			
TotalAmount	_		
value		,	
O optional O o unbounded M 1 1 O o unbounded M 1 1 O o unbounded M 1 1 O o 1 O o unbounded M required O optional O o 1			
RefOrder			
M			
O 0 unbounded M 1 1	_		
O 0 unbounded M 1 1 M 1 1 O 0 1 O 0 unbounded M required O optional O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 Driving a control of the properties o			
M 1 1 M 1 1 O 0 1 O 0 unbounded M required O optional O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 D			
M 1 1 O 0 1 O 0 unbounded M required O optional O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 D 0 1	_		
○ 0 1 SystemID ○ 0 unbounded Other Attribute M required optional - type value ○ 0 1 Parties M 1 1 Vasd:sequence O 0 1 Vasd:sequence M 1 1 Vasd:sequence CustID Name CustomsNumber Address M 1 1 StreetName StreetNumber StreetNumber D 0 1 District CityName CC C C POBAddress Xsd:sequence Xsd:sequence StreetNumber StreetName StreetName StreetName StreetName Xsd:sequence StreetName Xsd:sequence Xsd:sequence Xsd:sequence			
O 0 unbounded M required O optional O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 D			
M required O optional O 1 M 1 O 0 M 1 O 0 M 1 O 0 M 1 O 0 N 1 O 0 N 1 N 1 O 0 N 1 O 0 N 1 O 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D 0 D	0	0 1	└─ SystemID
O optional value O o 1 Parties M 1 1 xsd:sequence O o 1 vsd:sequence M 1 1 xsd:sequence CustID Name CustomsNumber CustomsNumber O o 1 xsd:sequence StreetName StreetName StreetNumber District District Zip CityName CC O o 1 POBAddress M 1 1 xsd:sequence - Zip xsd:sequence	0	0 unbounded	└── OtherAttribute
O 0 1 Parties M 1 1 v.sd:sequence O 0 1 Originator M 1 1 v.sd:sequence CustID Name CustomsNumber O 0 1 Address M 1 1 v.sd:sequence CustomsNumber StreetName CustomsNumber StreetName CustomsNumber CityName CustomsNumber CityName CustomsNumber CityName CityName CC CustomsNumber CityName CityName CC Count CC POBAddress v.sd:sequence Viscontinue Viscontinue Viscontinue Viscontinue <td></td> <td></td> <td></td>			
M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1	0	,	
O 0 1 M 1 1 D 0 0 1			
M 1 1 M 1 1 O 0 1 O 0 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 D			
M 1 1 O 0 1 O 0 1 M 1 1 O 0 1 M 1 1 O 0 1 D			-
O 0 1 O 0 1 O 0 1 M 1 1 O 0 1 StreetName StreetNumber O 0 1			
O 0 1 O 0 1 M 1 1 O 0 1 D			
O 0 1 M 1 1 O 0 1 C 5treetName C 0 1 C 0 0 1 C 5treetNumber C 0 0 1 C 5treetNumber C 1 C 1 C 1 C 1 C 2 C 1 C 2 C 2 C 2 C 2 C 3 C 3 C 4 C 4 C 5treetNumber C 5treetNumber C 1 C 1 C 1 C 2 C 1 C 2 C 2 C 2 C 2 C 3 C 3 C 4 C 5 C 5 C 6 C 7 C 7 C 7 C 7 C 7 C 7 C 7 C 7 C 7 C 7			
M 1 1 O 0 1			
O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1		-	
O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 M 1 1 O 0 1 O 0 1 O 0 1 O 0 1 O 0 1	_		
O 0 1 O 0 1 O 0 1 O 0 1 O 0 1 M 1 1 O 0 1 District - Zip - CityName - CC - C		-	
O 0 1 O 0 1 O 0 1 M 1 1 O 0 1 POBAddress xsd:sequence Zip	0	0 1	
O 0 1	0		— Zip
O 0 1 M 1 1 O 0 1 POBAddress xsd:sequence - Zip		•	
M 1 1 O 0 1			
O 0 1 - Zip		*	
O O I CityName		*	
	O	U I	Oityreame

St = Status: M=Mandatory (Pflicht), O=Optional




St	Vorkommen	Element
St	Vorkommen 0 1 0 1 0 1 1 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 1 1 0 1	Element - Postbox - CC - LargeCustZip - Contact - xsd:sequence - FirstName - LastName - Role - Position - Department - Address - xsd:sequence - StreetName - StreetNumber - District - Zip - CityName - CC - Zip - CityName - CC - Zip - CityName - CC - Email - Phone - Fax
	0 1 1 1 1 1 0 1 0 1 1 1 0 1	Producer xsd:sequence CustID Name Address xsd:sequence StreetName StreetNumber District Zip CityName CC POBAddress xsd:sequence Zip CityName CC LargeCustZip Contact xsd:sequence FirstName LastName Role Position



St	Vorkommen	Element
0	0 1	Department
0	0 1	├── Address
M	1 1	xsd:sequence
0	0 1	─ StreetName
0	0 1	- StreetNumber
0	0 1	— District
0	0 1 0 1	— Zip
0	0 1	
0	0 1	→ POBAddress
M	1 1	xsd:sequence
0	0 1	Zip
0	0 1	- CityName
0	0 1	— Postbox
0	0 1	│
0	0 1 0 1	— Phone
Ö	0 1	Fax
0	0 1	⊤ Submitter
M	1 1	xsd:sequence
М	1 1	— CustID
0	0 1	⊢ Name
0	0 1	Address
М О	1 1 0 1	xsd:sequence StreetName
Ö	0 1	StreetNumber
Ö	0 1	- District
0	0 1	
0	0 1	- CityName
0	0 1	<u> cc</u>
O M	0 1	POBAddress
O	1 1	xsd:sequence Zip
Ö	0 1	CityName
Ö	0 1	- Postbox
0	0 1	
0	0 1	- LargeCustZip
0	0 1	Contact
M O	1 1 0 1	├── xsd:sequence ├── FirstName
0	0 1	- LastName
Ö	0 1	- Role
O	0 1	- Position
0	0 1	- Department
0	0 1	Address
M	1 1	xsd:sequence
0	0 1 0 1	StreetName StreetNumber
0	0 1	— StreetNumber — District
Ö	0 1	Zip
0	0 1	— CityName
0	0 1	



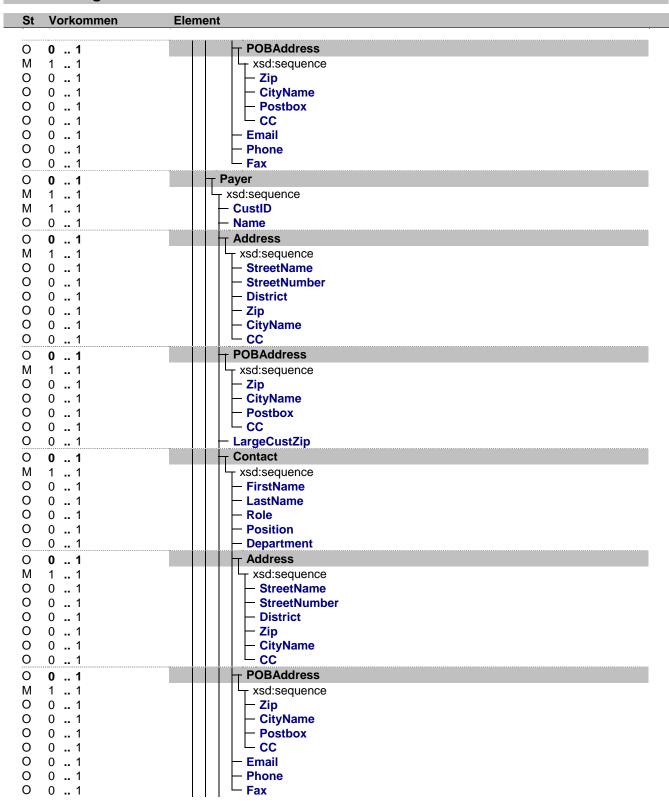

Ausgabe: 16.11.2018




St	Vorkommen	Element
0	0 unbounded	│
М	1 1	xsd:sequence
0	0 1	ContractID
0	0 1	- ContractTypeCode
0	0 1	☐ IssueDate
0	0 1	PaymentMeans
M	1 1	xsd:sequence
0	0 1 0 1	 Procedure Participation
0	0 1	PostCardID
0	0 1	+ Financial Account
M	1 1	T xsd:sequence
0	0 1	- AccountHolder
0	0 1	- AccountID
0	0 1	- IBAN
0	0 1	- FinancialInstitution
0	0 1	
0	0 1 0 1	─ BankCode ─ BIC
0		— BiC ☐ OtherParty
M	0 unbounded 1 1	xsd:sequence
Ö	0 1	- Role
M	1 1	— CustID
Ö	0 1	Name
0	0 1	→ Address
М	1 1	xsd:sequence
0	0 1	- StreetName
0	0 1	- StreetNumber
0	0 1	— District
0	0 1	— Zip
0	0 1 0 1	⊢ CityName ⊢ CC
0	0 1	→ POBAddress
М	1 1	xsd:sequence
Ö	0 1	☐ Zip
O	0 1	— CityName
0	0 1	- Postbox
0	0 1	
0	0 1	
0	0 unbounded	Contact
M	1 1	xsd:sequence
0	0 1 0 1	FirstNameLastName
0	0 1	— Role
Ö	0 1	— Position
Ŏ	0 1	— Department
0	0 1	⊤ Address
М	1 1	xsd:sequence
0	0 1	- StreetName
0	0 1	- StreetNumber
0	0 1	— District
0	0 1	



St	Vorkommen	Element
0	0 1 0 1	CC CityName
0	0 1	POBAddress
M	1 1	xsd:sequence
0	0 1 0 1	├─ Zip ├─ CityName
0	0 1	- Postbox
Ö	0 1	CC
0	0 1	— Email
0	0 1	— Phone
0	0 1	└─ Fax
0	0 1	Induction
M O	1 1 0 1	xsd:sequence TransitDirectionCode
0	0 1	- ProductionPlantID
0	0 1	- Address
M	1 1	xsd:sequence
0	0 1	- StreetName
0	0 1	─ StreetNumber
0	0 1	— District
0	0 1	│
0	0 1	CC
M	1 1	EarliestDateTime
0	0 1	LatestDateTime
0	0 unbounded	ShipmentItem
М	1 1	☐ xsd:sequence
0	0 unbounded	Shipment
M O	1 1 0 1	xsd:sequence ShipmentID
Ö	0 1	— Shiphierido — Desc
Ö	0 1	Type
0	0 1	T GWM
М	required	- value
0	optional	│
0	0 1	— Qty
0	0 1 0 1	- AdditionalQty - TotalQty
Ö	0 1	- MachineProcessable
Ö	0 1	- MachineReadable
0	0 1	- Addressed
0	0 unbounded	CodeApplied
M	required	value
	optional	│
O M	0 1 required	- Individualiweight
O	optional	unit
ŏ	0 1	Format
0	0 1	├── Length
М	required	│
0	optional	│
0	0 1	 Width

Ausgabe: 16.11.2018



St	Vorkommen	Element
ા	vorkommen	Element
М	required	
0	optional	unit
0	0 1	Thickness
M O	required optional	
0	0 1	
M	required	
Ö	optional	currency
0	0 1	│
M	required	— value
0	optional	☐ currency
0	0 1	─ NonDeliveryDisposition
O M	0 unbounded required	- type
Ö	optional	value
0	0 unbounded	☐ Supplement
M	1 1	xsd:sequence
0	0 1	SupplementID
0	0 1	— Desc
0	0 1	│ │ │ ├─ Type │
O M	0 1 required	- value
O	optional	value unit
0	0 1	
M	required	— value
0	optional	Lunit
0	0 1	
0	0 unbounded	OtherAttribute
M O	required optional	type value
0	0 1	
M	1 1	xsd:sequence
0	0 1	│
0	0 1	Amount
M	required	
0	optional	Currency
O M	0 1	AmountShipment
O	required optional	
ŏ	0 1	Code
0	0 1	─ PaymentClearingNumber
0	0 1	— AdditionalCharge
0	0 1	- FrankingIdPrefix
0	0 1	☐ FrankingIdEncoding
0	0 1 optional	Destination prec
M	1 1	xsd:sequence
0	0 unbounded	│ │ ├── Dst
Ö	optional	— from
0	optional	– to
0	optional	- cc
0	optional	

St = Status: M=Mandatory (Pflicht), O=Optional



St	Vorkommen	Element
0 0 0 0 0 0 0 0 M 0 M 0 0 0 0 M	optional 1 1 0 1 1 1 0 1 0 1 1 1 0 1 0 1 0 1	- qty - id - addId - addIdType - precP - precT - bq - tz - frankingIdPrefix - frankingIdEncoding - xsd:sequence - Consignee - xsd:sequence - Name - CustomsNumber - TaxID - Contact - xsd:sequence - FirstName - LastName - Role - Position
0 M 0 0 0 0	0 1 0 1 1 1 0 1 0 1 0 1 0 1 0 1 0 1	- Department - Address - xsd:sequence - StreetName - StreetNumber - District - Zip - CityName - CC
O M O O O O O O O O O O O O O O O O O O	0 1 1 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1	POBAddress

St = Status: M=Mandatory (Pflicht), O=Optional




St	Vorkommen	Element
<u> </u>	VOIROIIIIIeii	Liement
0	0 1	GWM
M	required	unit
0	optional 0 1	— um -⊤ TotalValue
Ö	0 1	- value
0		currency
0	0 1	PostageAmount
0		currency value
0	0 unbounded	— value — Document
Ö	o unbounded	— type
0		│
0	0 unbounded	ContentPiece
0		
Ö		— desc
0		— value
0		— currency
0		— weight — unit
Ö		— origin
0		∟ hstariff
М	1 unbounded	Litem
M O	1 1 0 1	xsd:sequence
0	0 1	→ TotalAmount
M	required	⊢ value
0	optional	└─ currency
0	0 unbounded	Ref
M	1 1	
O M	0 1 1 1	xsd:sequence
Ö	0 1	- OrderID
0	0 unbounded	☐ CustOrderID
М	1 1	xsd:sequence
M O	1 1	— CustID — SystemName
0	0 1	SystemD
0	0 unbounded	☐ RefShipment
М	1 1	xsd:sequence
0	0 1	- RefShipmentID
0	0 unbounded 0 1	RefSupplementID Qty
0	0 unbounded	Range
M	required	- from
М	required	└ to
М	1 unbounded	LineItem
M O	1 1 0 1	xsd:sequence ProductNumber
0	0 unbounded	 ─ ProductNumber ─ Variant
Ö	0 1	- EarliestDateTime
0	0 1	- LatestDateTime

St = Status: M=Mandatory (Pflicht), O=Optional



C4	Vorkommen	Flores
St	vorkommen	Element
0	0 unbounded	└┬ OtherAttribute
M	required	— type
0	optional	└─ value
0	0 1	── Packaging
M	1 1	☐ xsd:sequence
0	0 1	─ SlotQty
0	0 1	─ Type
0	0 1	│
0	0 unbounded	Package
0	optional	— packageID
0	optional	— productGroup
0	optional 	— format
0	optional	— sortMethod
0	optional optional	- refPackage
0	optional	├─ type ├─ stackable
Ö	optional	— frameQty
Ö	optional	- zipDst
ŏ	optional	— deliveryBase
Ö	optional	— zipFrom
0	optional	- zipTo
M	1 1	xsd:sequence
0	0 1	
M	required	- value
0	optional	
0	0 1	 NWM
M	required	- value
0	optional	│
0	0 unbounded	└── Ref
M	1 1	xsd:sequence
0	0 1	RefOrder
M	1 1	☐ xsd:sequence
0	0 1	─ OrderID
0	0 1	CustOrderID
M	1 1	xsd:sequence
M	1 1	— CustID
0	0 1	- SystemName
0	0 1	SystemID
0	0 unbounded	RefShipment
M	1 1	xsd:sequence
0	0 1 0 1	- RefShipmentID
0		├─ Qty ├─ Range
O M	0 unbounded required	- from
M	required required	
. <u>!\\</u>	0 1	→ OrderTree
M	1 1	
M	1 1	+ OrderHeader
O	optional	— includesDestinations
0	optional	├─ includesDestinations ├─ includesPackaging
M	1 1	T xsd:sequence
Ö	0 1	- ProductionState
-		

St = Status: M=Mandatory (Pflicht), O=Optional



St	Vorkommen	Element
00000000000	0 1 0 1 0 1 optional 0 1 0 1 0 1 0 1 0 1 0 1 0 1	- ChangedAt - OrderType - State - final - Released - AchievedDataQuality - IsActive - CreationDate - OrderCategory - OrderCategoryGroup - OrderID
O M M O O	0 unbounded 1 1 1 1 0 1 0 1 required optional	CustOrderID xsd:sequence CustID SystemName SystemID TotalAmount value currency
0	0 unbounded	└─ OrderTree