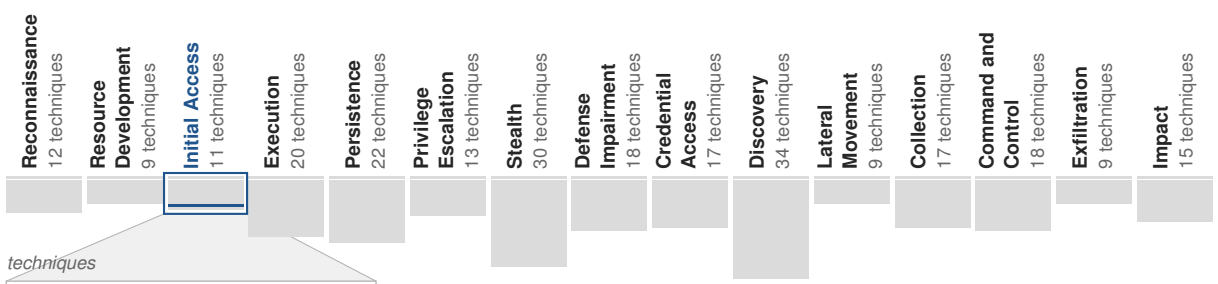

techniques

- Content Injection
- Drive-by Compromise
- Exploit Public-Facing Application
- External Remote Services
- Hardware Additions
- Phishing (4)
- Replication Through Removable Media
- Supply Chain Compromise (3)
- Trusted Relationship
- Valid Accounts (4)
- Wi-Fi Networks

sub-techniques

- Default Accounts
- Domain Accounts
- Local Accounts
- Cloud Accounts

procedures

Procedure Examples

G1017 Volt Typhoon Volt Typhoon has used compromised domain accounts to authenticate to devices on compromised networks.

G0019 **Naikon** Naikon has used administrator credentials for lateral movement in compromised networks.

. . . 34 procedure examples in all