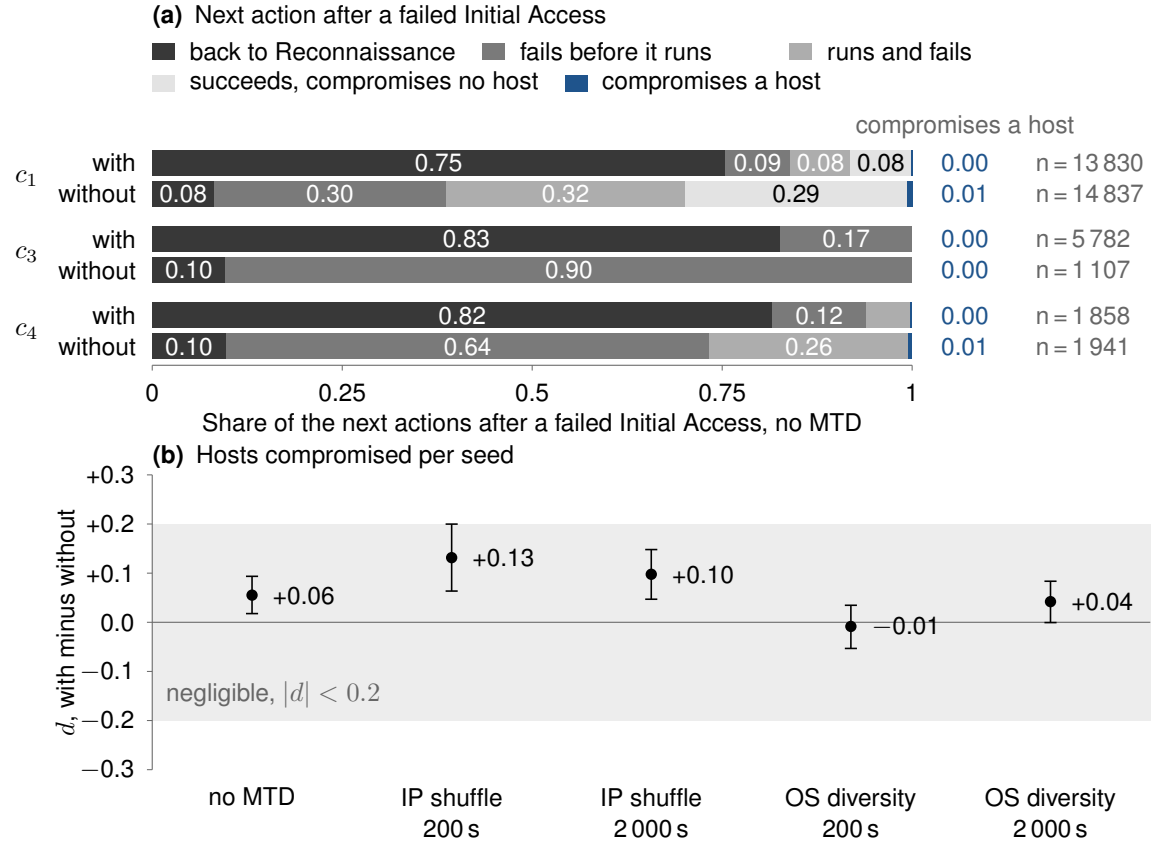
(a) Next action after a failed Initial Access
back to Reconnaissance
fails before it runs
runs and fails
succeeds, compromises no host
compromises a host
compromises a host
c_1
with
without
0.75
0.09
0.08
0.08
0.00
n = 13 830
0.08
0.30
0.32
0.29
0.01
n = 14 837
c_3
with
without
0.83
0.17
0.00
n = 5 782
0.10
0.90
0.00
n = 1 107
c_4
with
without
0.82
0.12
0.00
n = 1 858
0.10
0.64
0.26
0.01
n = 1 941
0
0.25
0.5
0.75
1
Share of the next actions after a failed Initial Access, no MTD
(b) Hosts compromised per seed
+0.3
+0.2
+0.1
0.0
−0.1
−0.2
−0.3
d, with minus without
+0.06
+0.13
+0.10
−0.01
+0.04
negligible, $|d| < 0.2$
no MTD
IP shuffle 200 s
IP shuffle 2 000 s
OS diversity 200 s
OS diversity 2 000 s