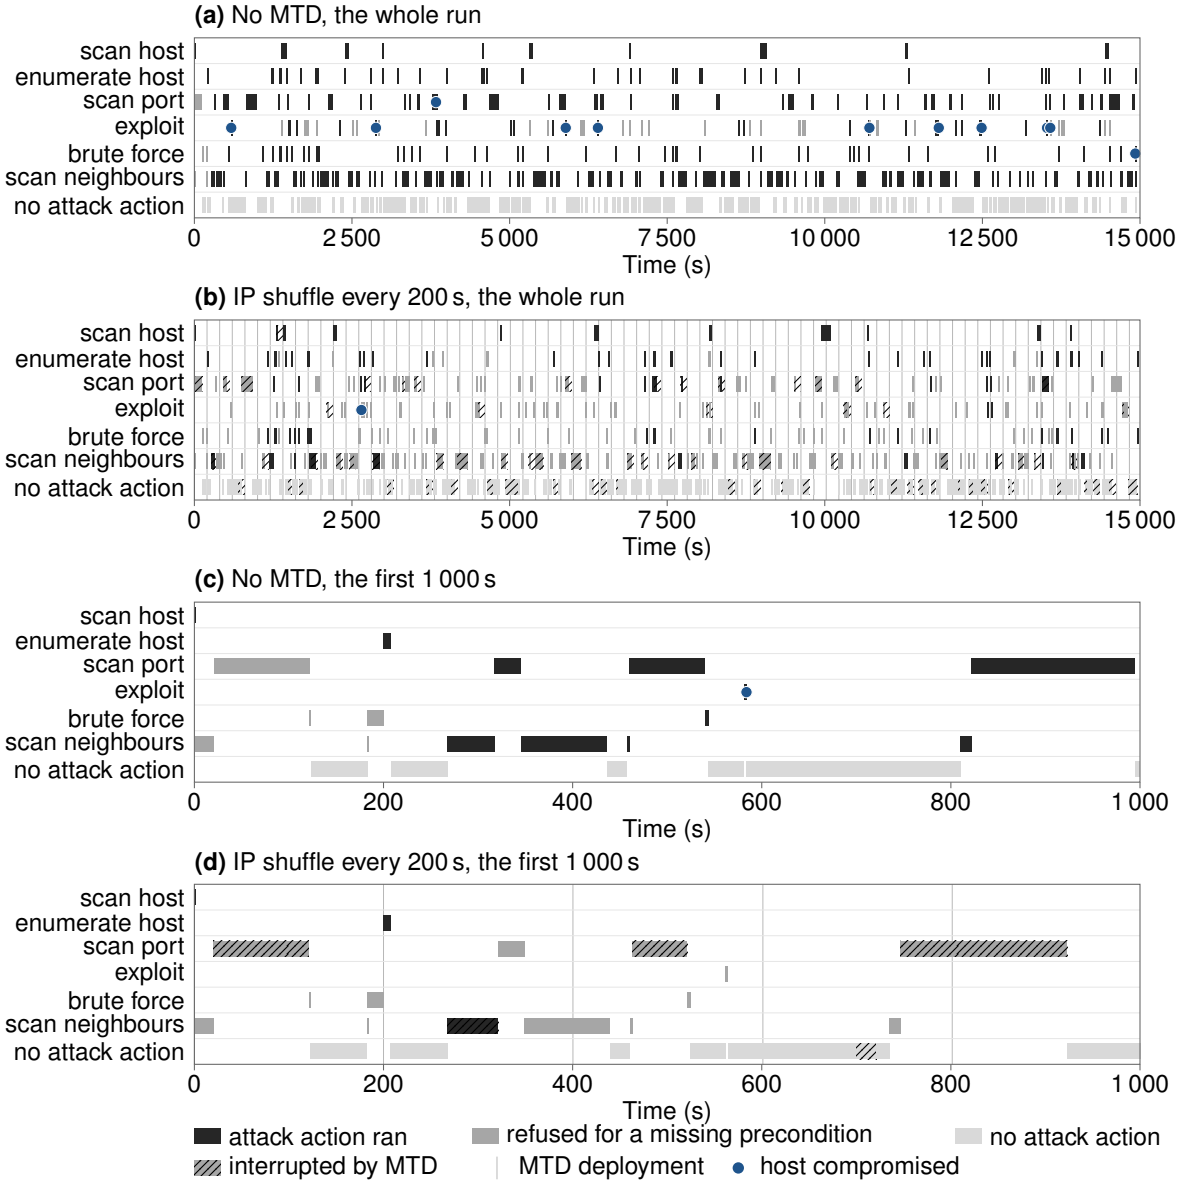
(a) No MTD, the whole run
scan host
enumerate host
scan port
exploit
brute force
scan neighbours
no attack action
0
2 500
5 000
7 500
10 000
12 500
15 000
Time (s)
(b) IP shuffle every 200 s, the whole run
scan host
enumerate host
scan port
exploit
brute force
scan neighbours
no attack action
0
2 500
5 000
7 500
10 000
12 500
15 000
Time (s)
(c) No MTD, the first 1 000 s
scan host
enumerate host
scan port
exploit
brute force
scan neighbours
no attack action
0
200
400
600
800
1 000
Time (s)
(d) IP shuffle every 200 s, the first 1 000 s
scan host
enumerate host
scan port
exploit
brute force
scan neighbours
no attack action
0
200
400
600
800
1 000
Time (s)
attack action ran
refused for a missing precondition
no attack action
interrupted by MTD
MTD deployment
host compromised