

MTDSim




Attacker

Holds



Procedure

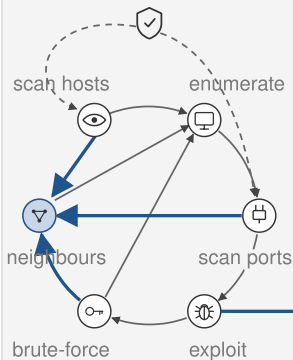

exploits



Network

Host layer

visible subgraph

subnets Barabási–Albert

enters

exposed, fixed



depth

target

Service layer



services, Watts–Strogatz



Vulnerability layer



one service



Defence

Execution scheme

when

which or

Mechanisms

IP shuffle

Topology shuffle

Host topology shuffle

OS diversity

Service diversity

Port shuffle

User shuffle