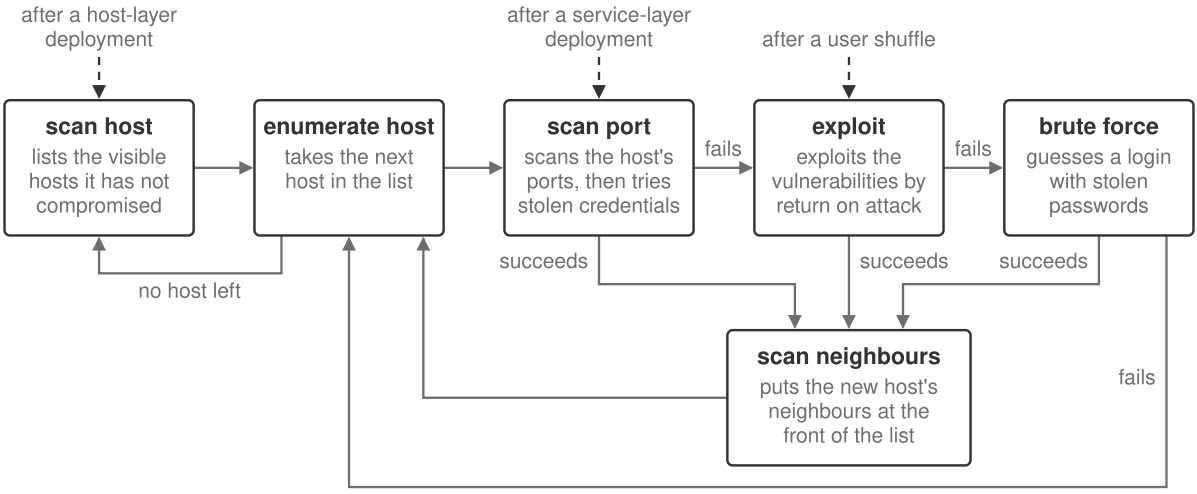
after a host-layer deployment
after a service-layer deployment
after a user shuffle
scan host
lists the visible hosts it has not compromised
enumerate host
takes the next host in the list
scan port
scans the host's ports, then tries stolen credentials
fails
exploit
exploits the vulnerabilities by return on attack
fails
brute force
guesses a login with stolen passwords
no host left
succeeds
succeeds
succeeds
scan neighbours
puts the new host's neighbours at the front of the list
fails