


—●— APT attacker model (pooled over c_1 to c_4)

--■-- baseline attacker


Defence mechanisms, by the layer they rewrite

NCR reduction


(a) Host layer

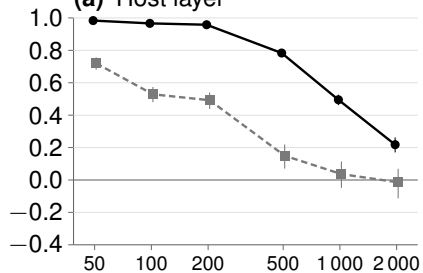

(b) Service layer

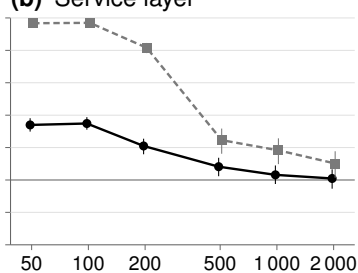


(c) Credentials: user shuffle

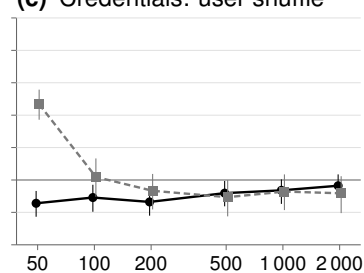


Deployment strategies


(d) Random

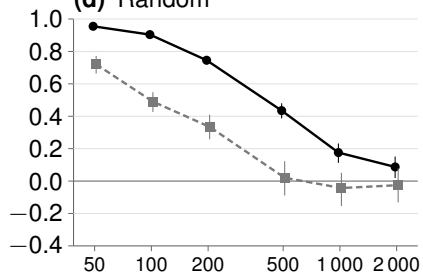

(e) MTDSshield

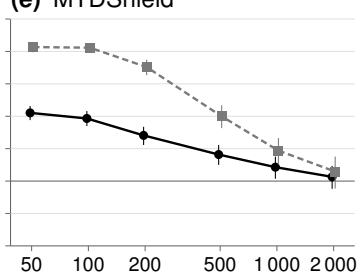

(f) Alternative

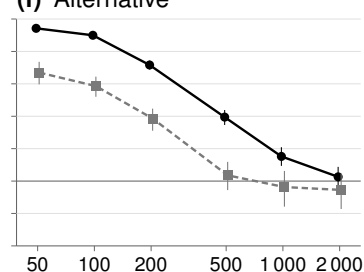

Deployment interval (s)