

# Exercises Preparation

Setup Hadoop, HDFS and Yarn manually  
(standalone)



# Install and Setup Java

## 1. Install OpenJDK (JDK 8):

```
sudo apt-get update  
sudo apt-get install openjdk-8-jdk
```

## 2. Verify installation:

```
java -version  
openjdk version "1.8.0_275"  
OpenJDK Runtime Environment (build 1.8.0_275-8u275-b01-0ubuntu1~20.04-b01)  
OpenJDK 64-Bit Server VM (build 25.275-b01, mixed mode)
```

## 2. SET *JAVA\_HOME* and *JRE\_HOME*:

```
sudo vi /etc/environment
```

```
JAVA_HOME="/usr/lib/jvm/java-8-openjdk-amd64"  
JRE_HOME="/usr/lib/jvm/java-8-openjdk-amd64/jre"
```



# Setup Hadoop User

## 1. Create User:

```
sudo adduser --disabled-password --gecos "" hadoop
```

## 2. Switch To User:

```
sudo su hadoop
```

## 3. Switch Back To Root user:

```
exit
```

# Setup SSH (needed by Hadoop components)

## 1. Install SSH and PDSH:

```
sudo apt-get install ssh pdsh
```

## 2. Create Private/Public Keypair for hadoop user (*without passphrase*):

```
sudo su hadoop  
cd  
ssh-keygen -t rsa -N "" -f /home/hadoop/.ssh/id_rsa
```

## 3. Add Public Key To Authorized Keys file (to enable passwordless ssh login)

```
cat /home/hadoop/.ssh/id_rsa.pub >> /home/hadoop/.ssh/authorized_keys  
chmod 0600 /home/hadoop/.ssh/authorized_keys
```

# Setup SSH (needed by Hadoop components)

## 4. Check If SSH Is Working

```
hadoop@big-data:~$ ssh localhost
The authenticity of host 'localhost (127.0.0.1)' can't be established.
ECDSA key fingerprint is SHA256:YEUFliBVczkz2rvKWnYU9hB2ix2jnhBqLlbsJQfuBpE.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added 'localhost' (ECDSA) to the list of known hosts.
Welcome to Ubuntu 18.04.3 LTS (GNU/Linux 4.15.0-1044-gcp x86_64)
 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/advantage
System information as of Sat Oct 12 15:01:56 UTC 2019
System load:  0.0           Processes:      117
Usage of /:   5.8% of 28.90GB Users logged in:    1
Memory usage: 2%           IP address for ens4: 10.156.0.6
Swap usage:   0%
30 packages can be updated.
17 updates are security updates.
Last login: Sat Oct 12 14:49:27 2019 from 80.144.211.195

hadoop@big-data:~$ exit
logout
Connection to localhost closed.

hadoop@big-data:~$
```

# Install Hadoop

## 1. Download Hadoop (v3.1.1):

```
wget https://archive.apache.org/dist/hadoop/common/hadoop-3.1.2/hadoop-3.1.2.tar.gz
```

## 2. Extract Binaries:

```
tar -xvzf hadoop-3.1.2.tar.gz
```


## 3. Move Binaries:

```
mv hadoop-3.1.2 hadoop
```

# Configure Hadoop

## 1. Set Up **UNIX** Environment Variables

```
vi .bashrc
```



```
export HADOOP_HOME=/home/hadoop/hadoop
export HADOOP_INSTALL=$HADOOP_HOME
export HADOOP_MAPRED_HOME=$HADOOP_HOME
export HADOOP_COMMON_HOME=$HADOOP_HOME
export HADOOP_HDFS_HOME=$HADOOP_HOME
export YARN_HOME=$HADOOP_HOME
export HADOOP_COMMON_LIB_NATIVE_DIR=$HADOOP_HOME/lib/native
export PATH=$PATH:$HADOOP_HOME/sbin:$HADOOP_HOME/bin
export PDSH_RCMD_TYPE=ssh
```



```
source .bashrc
```

# Configure Hadoop

## 2. Add **Hadoop** Environment Variables (*hadoop-env.sh*)

```
vi /home/hadoop/hadoop/etc/hadoop/hadoop-env.sh
```



```
export JAVA_HOME=/usr/lib/jvm/java-8-openjdk-amd64
```



# Configure Hadoop

## 3. Set Up **CORE** Variables (*core-site.xml*)

```
vi /home/hadoop/hadoop/etc/hadoop/core-site.xml
```




```
<configuration>
  <property>
    <name>fs.default.name</name>
    <value>hdfs://localhost:9000</value>
  </property>
</configuration>
```

# Configure Hadoop

## 4. Set Up **HDFS** Variables (*hdfs-site.xml*)

```
vi /home/hadoop/hadoop/etc/hadoop/hdfs-site.xml
```



```
<configuration>
  <property>
    <name>dfs.replication</name>
    <value>1</value>
  </property>


  <property>
    <name>dfs.name.dir</name>
    <value>file:///home/hadoop/hadoopdata/hdfs/namenode</value>
  </property>

  <property>
    <name>dfs.data.dir</name>
    <value>file:///home/hadoop/hadoopdata/hdfs/datanode</value>
  </property>
</configuration>
```

# Configure Hadoop

## 5. Set Up **MapReduce** Variables (*mapred-site.xml*)

```
vi /home/hadoop/hadoop/etc/hadoop/mapred-site.xml
```




```
<configuration>
  <property>
    <name>mapreduce.framework.name</name>
    <value>yarn</value>
  </property>
  <property>
    <name>yarn.app.mapreduce.am.env</name>
    <value>HADOOP_MAPRED_HOME=${HADOOP_HOME}</value>
  </property>
  <property>
    <name>mapreduce.map.env</name>
    <value>HADOOP_MAPRED_HOME=${HADOOP_HOME}</value>
  </property>
  <property>
    <name>mapreduce.reduce.env</name>
    <value>HADOOP_MAPRED_HOME=${HADOOP_HOME}</value>
  </property>
</configuration>
```

# Configure Hadoop

## 6. Set Up **YARN** Variables (*yarn-site.xml*)

```
vi /home/hadoop/hadoop/etc/hadoop/yarn-site.xml
```



```
<configuration>
  <property>
    <name>yarn.nodemanager.aux-services</name>
    <value>mapreduce_shuffle</value>
  </property>
  <property>
    <name>yarn.nodemanager.resource.memory-mb</name>
    <value>16384</value>
  </property>
</configuration>
```

# Configure Hadoop

## 7. Clear HDFS

```
hdfs namenode -format
```

## 8. Start HDFS:

```
start-dfs.sh
```


## 9. Start YARN:

```
start-yarn.sh
```

# Check Hadoop/HDFS

## 10. Run Admin Status Report

```
hdfs dfsadmin -report
```



```
Configured Capacity: 31035637760 (28.90 GB)
Present Capacity: 28187471872 (26.25 GB)
DFS Remaining: 28187447296 (26.25 GB)
DFS Used: 24576 (24 KB)
DFS Used%: 0.00%
Replicated Blocks:
Under replicated blocks: 0
Blocks with corrupt replicas: 0
Missing blocks: 0
Missing blocks (with replication factor 1): 0
Low redundancy blocks with highest priority to recover: 0
Pending deletion blocks: 0
Erasure Coded Block Groups:
Low redundancy block groups: 0
Block groups with corrupt internal blocks: 0
Missing block groups: 0
Low redundancy blocks with highest priority to recover: 0
Pending deletion blocks: 0
```

```
-----
Live datanodes (1):
Name: 127.0.0.1:9866 (localhost)
Hostname: big-data.c.dhbw-253679.internal
Decommission Status : Normal
Configured Capacity: 31035637760 (28.90 GB)
DFS Used: 24576 (24 KB)
Non DFS Used: 2831388672 (2.64 GB)
DFS Remaining: 28187447296 (26.25 GB)
DFS Used%: 0.00%
DFS Remaining%: 90.82%
Configured Cache Capacity: 0 (0 B)
Cache Used: 0 (0 B)
Cache Remaining: 0 (0 B)
Cache Used%: 100.00%
Cache Remaining%: 0.00%
XorSivers: 1
Last contact: Sat Oct 12 15:19:44 UTC 2019
Last Block Report: Sat Oct 12 15:18:29 UTC 2019
Num of Blocks: 0
```

# Check Hadoop/HDFS

11. Check Ressource Manager Landing Page (<http://XXX.XXX.XXX.XXX:8088/cluster>):

**Nodes of the cluster**

Cluster Metrics

Apps Submitted	Apps Pending	Apps Running	Apps Completed	Containers Running	Memory Used	Memory Total	Memory Reserved	VCores Used	VCores Total	VCores Reserved
0	0	0	0	0	0 B	8 GB	0 B	0	8	0

Cluster Nodes Metrics

Active Nodes	Decommissioning Nodes	Decommissioned Nodes	Lost Nodes	Unhealthy Nodes	Rebooted Nodes	Shutdown Nodes
1	0	0	0	0	0	0

Scheduler Metrics

Scheduler Type	Scheduling Resource Type	Minimum Allocation	Maximum Allocation	Maximum Cluster Application Priority
Capacity Scheduler	[memory-mb (unit=M), vcores]	<memory:1024, vCores:1>	<memory:8192, vCores:4>	0


Show 20 entries

Node Labels	Rack	Node State	Node Address	Node HTTP Address	Last health-update	Health-report	Containers	Allocation Tags	Mem Used	Mem Avail	VCores Used	VCores Avail	Version
/default-rack		RUNNING	big-data.c.dhbw-254309.internal:40247	big-data.c.dhbw-254309.internal:8042	Sat Oct 12 15:23:36 +0000 2019		0		0 B	8 GB	0	8	3.1.2

Showing 1 to 1 of 1 entries

# Check Hadoop/HDFS

## 12. Check NameNode Landing and Status Page (<http://XXX.XXX.XXX.XXX:9870>):

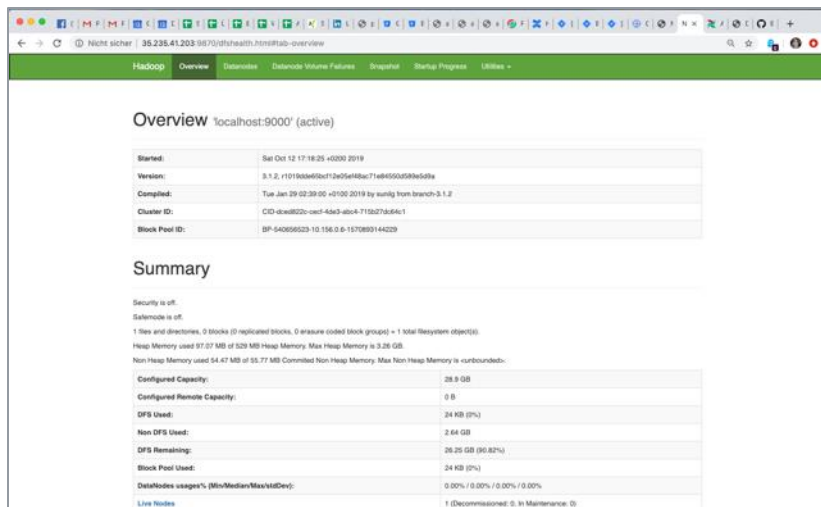

The screenshot shows the Hadoop Overview page for 'localhost:9000' (active). The page has a green header with navigation tabs: Hadoop, Overview, Datanodes, Datanode Volume Failures, Snapshot, Startup Progress, and Utilities. The Overview tab is selected.

**Overview 'localhost:9000' (active)**


Started:	Sat Oct 12 17:18:25 +0200 2019
Version:	3.1.2, r1019d460b0712a25e48ac71e845050598e5d8a
Compiled:	Tue Jan 29 02:39:00 +0100 2019 by sunlig from branch-3.1.2
Cluster ID:	CID-d4e8020-cc6f-4ba3-ab04-715b27b664c1
Block Pool ID:	BP-64056523-10.156.0.0-1570889144229

**Summary**

Security is off.  
Safemode is off.  
1 file and directories, 0 blocks (0 replicated blocks, 0 erasure coded block groups) = 1 total filesystem object(s).  
Heap Memory used 57.07 MB of 529 MB Heap Memory. Max Heap Memory is 3.26 GB.  
Non-Heap Memory used 54.47 MB of 55.77 MB Committed Non-Heap Memory. Max Non-Heap Memory is unbounded.

Configured Capacity:	28.0 GB
Configured Remote Capacity:	0 B
DFS Used:	24 KB (0%)
Non-DFS Used:	2.64 GB
DFS Remaining:	28.25 GB (99.82%)
Block Pool Used:	24 KB (0%)
Datanodes usage% (Min-Median-Max/stdDev)	0.00% / 0.00% / 0.00% / 0.00%

Live Nodes: 1 (Decommissioned: 0, In Maintenance: 0)

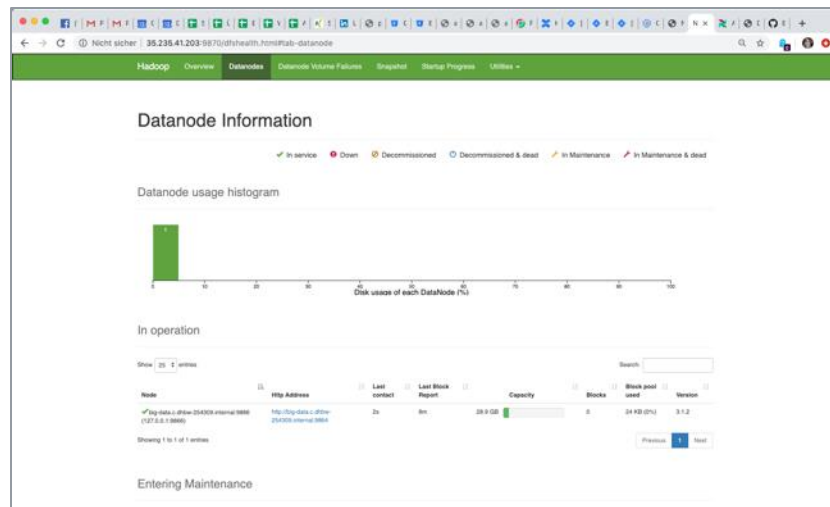


The screenshot shows the Hadoop Datanode Information page. The page has a green header with navigation tabs: Hadoop, Overview, Datanodes, Datanode Volume Failures, Snapshot, Startup Progress, and Utilities. The Datanodes tab is selected.

**Datanode Information**

Legend: ✔ In service ✖ Down ✖ Decommissioned ✖ Decommissioned & dead ✖ In Maintenance ✖ In Maintenance & dead

**Datanode usage histogram**



**In operation**

Show 25 / 1 entries

Node	Http Address	Last contact	Last Block Report	Capacity	Blocks	Block pool used	Version
10.156.0.0:9866	http://10.156.0.0:9866	2s	5m	28.0 GB	0	24 KB (0%)	3.1.2

Showing 1 to 1 of 1 entries


Buttons: Previous, Next

**Entering Maintenance**



# Check Hadoop/HDFS

## 13. Check HDFS File Browser (<http://XXX.XXX.XXX.XXX:9870/explorer.html#/>)

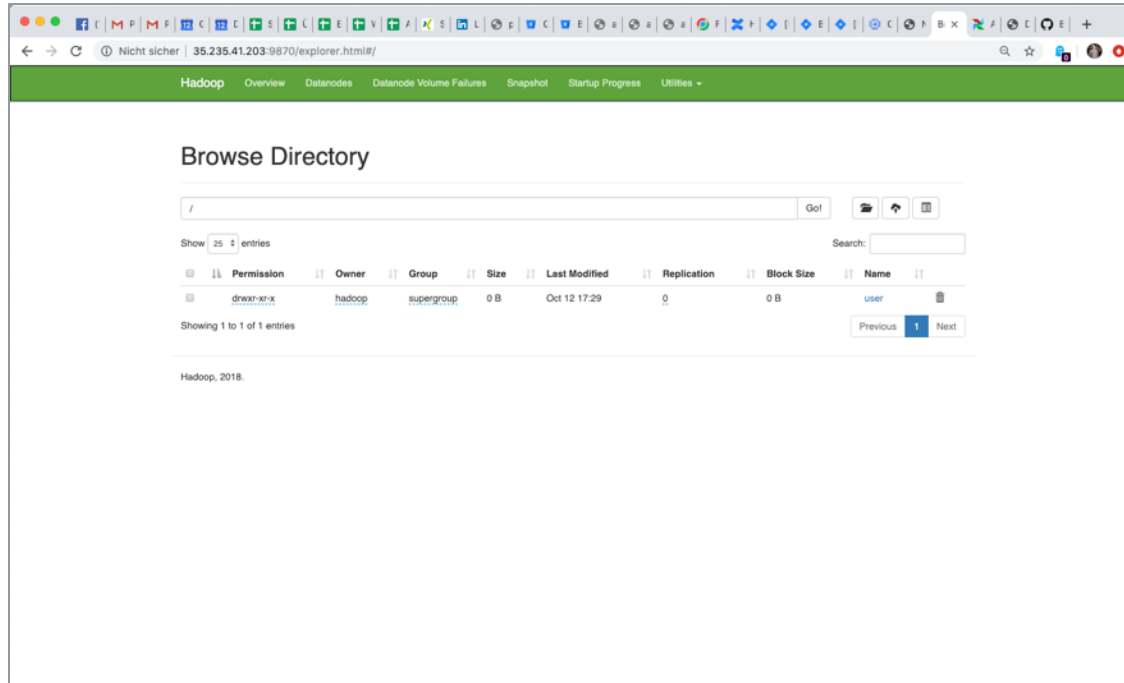

# Working with HDFS

## 1. Create User Directory (*on HDFS*):

```
hadoop fs -mkdir /user  
hadoop fs -mkdir /user/hadoop
```

## 2. List Directories (*on HDFS*):

```
hadoop@big-data:~$ hadoop fs -ls /  
Found 1 items  
drwxr-xr-x - hadoop supergroup          0 2019-10-12 15:29 /user  
hadoop@big-data:~$
```

# Working with HDFS

3. Copy File (just a *random log file*) from local directory to HDFS:

```
hadoop fs -put /var/log/dpkg.log /user/hadoop/dpkg.log
```

# Run Example MapReduce Job

1. Using MapReduce WordCount Jar provided by Hadoop to count words within file *dpkg.log*

```
hadoop jar hadoop/share/hadoop/mapreduce/hadoop-mapreduce-examples-3.1.2.jar wordcount /user/hadoop/dpkg.log /user/hadoop/test_output
```

2. View Running MapReduce Job:

The screenshot shows the Hadoop YARN web interface. The top navigation bar includes the Hadoop logo and the title 'All Applications'. The left sidebar contains a 'Cluster' section with links to 'About', 'Nodes', 'Node Labels', 'Applications', and 'Tools'. The main content area displays various metrics and a table of running applications.

**Cluster Metrics**

Apps Submitted	Apps Pending	Apps Running	Apps Completed	Containers Running	Memory Used	Memory Total	Memory Reserved	VCores Used	VCores Total	VCores Reserved
1	0	1	0	1	2 GB	8 GB	0 B	1	8	0

**Cluster Nodes Metrics**

Active Nodes	Decommissioning Nodes	Decommissioned Nodes	Lost Nodes	Unhealthy Nodes	Rebooted Nodes	Shutdown Nodes
1	0	0	0	0	0	0

**Scheduler Metrics**

Scheduler Type	Scheduling Resource Type	Minimum Allocation	Maximum Allocation	Maximum Cluster Application Priority
Capacity Scheduler	[memory-mb (unit=M), vcores]	<memory:1024, vCores:1>	<memory:8192, vCores:4>	0

**Applications Table**

ID	User	Name	Application Type	Queue	Application Priority	StartTime	FinishTime	State	FinalStatus	Running Containers	Allocated CPU VCoers	Allocated Memory MB	Reserved CPU VCoers	Reserved Memory MB	% of Queue	% of Cluster	Progress	Tracking UI	Blacklisted Nodes
application_1570893575375_0001	hadoop	word count	MAPREDUCE	default	0	Sat Oct 12 17:47:40 +0200 2019	N/A	RUNNING	UNDEFINED	1	1	2048	0	0	25.0	25.0	<div></div>	ApplicationMaster	0

Showing 1 to 1 of 1 entries


# Run Example MapReduce Job

## 3. Take A Look At The Output/Result (*via Bash*):

```
hadoop@big-data:~$ hadoop fs -cat /user/hadoop/test_output/part-r-00000
...
libglx0:amd64 8
libgraphite2-3:amd64 8
libgtk2.0-0:amd64 8
libgtk2.0-bin:amd64 8
libgtk2.0-common:all 9
libharfbuzz0b:amd64 8
libice-dev:amd64 8
libice6:amd64 8
libjbig0:amd64 8
libjpeg-turbo8:amd64 8
libjpeg8:amd64 8
libnss3:amd64 8
libogg0:amd64 8
libpango-1.0-0:amd64 8
libpangocairo-1.0-0:amd64 8
...
```

# Run Example MapReduce Job

## 4. Take A Look At The Output/Result (via *Web HDFS File Browser*):

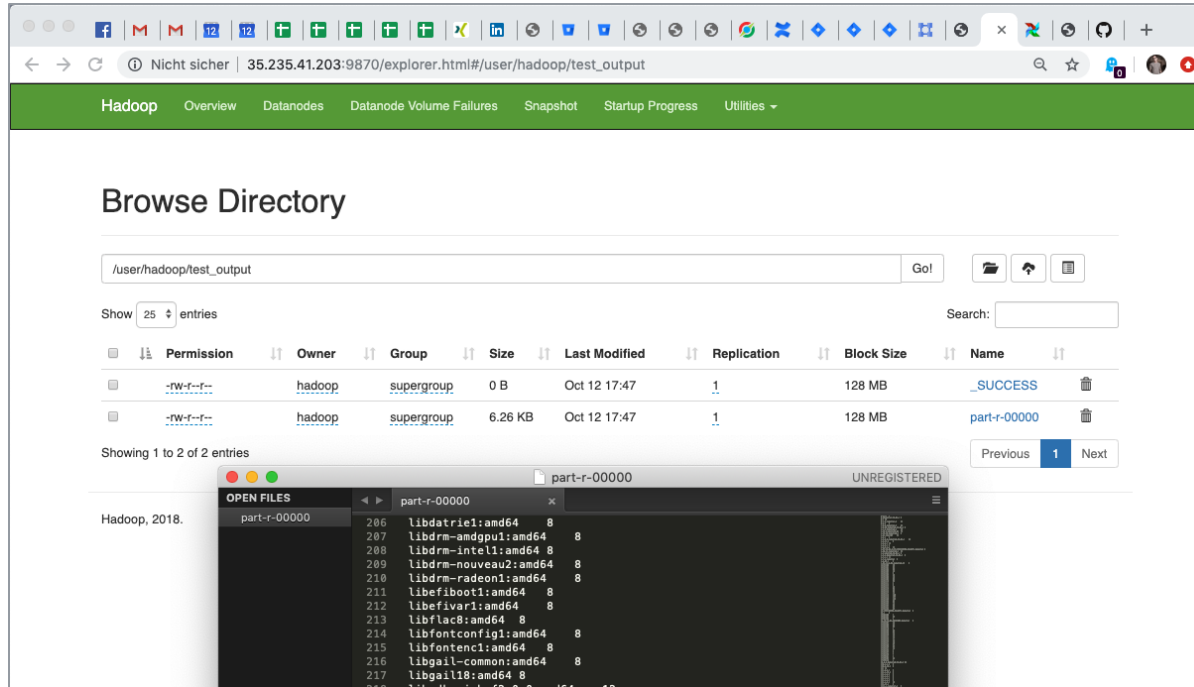

Browser Directory

/user/hadoop/test\_output

Go!

Show 25 entries

Search:

Permission	Owner	Group	Size	Last Modified	Replication	Block Size	Name
-rw-r--r--	hadoop	supergroup	0 B	Oct 12 17:47	1	128 MB	_SUCCESS
-rw-r--r--	hadoop	supergroup	6.26 KB	Oct 12 17:47	1	128 MB	part-r-00000

Showing 1 to 2 of 2 entries

Previous 1 Next

part-r-00000

UNREGISTERED

OPEN FILES

part-r-00000

```
206 libdatrie1:amd64 8
207 libdrm-amdgpu1:amd64 8
208 libdrm-intel1:amd64 8
209 libdrm-nouveau2:amd64 8
210 libdrm-radeon1:amd64 8
211 libefiboot1:amd64 8
212 libefivar1:amd64 8
213 libflac8:amd64 8
214 libfontconfig1:amd64 8
215 libfontenc1:amd64 8
216 libgail-common:amd64 8
217 libgail18:amd64 8
218 libgtk-3-0:amd64 12
```

# Exercises I

Hadoop, HDFS, Yarn



# Exercises

## 1. Clone git repo (to get sample data):

```
git clone https://github.com/marcelmittelstaedt/BigData.git
```

2.

- **Copy sample file** (/BigData/exercises/winter\_semester\_2025-2025/01\_hadoop/sample\_data/Faust\_1.txt) from Git Repo to **HDFS**.
- Use and **run default MapReduce Jar** (hadoop/share/hadoop/mapreduce/hadoop-mapreduce-examples-3.1.2.jar) to **calculate wordcount** for text file.
- **Copy result** of MapReduce job **back to local ubuntu filesystem**.

3.

- Use and **run default MapReduce Jar** (hadoop/share/hadoop/mapreduce/hadoop-mapreduce-examples-3.1.2.jar) to **get the count of occurrences** of the exact string **,Faust'** within text file.
- **Copy result** of MapReduce job **back to local ubuntu filesystem**.
- **Tip:** don't use *wordcount* part of jar but another MapReduce program on next slide.



## MapReduce Examples within *hadoop-mapreduce-examples-3.1.1.jar*:

<b>aggregatewordcount:</b>	An Aggregate based mapreduce program that counts the words in the input files.
<b>aggregatewordhist:</b>	An Aggregate based mapreduce program that computes the histogram of the words in the input files.
<b>bbp:</b>	A mapreduce program that uses Bailey-Borwein-Plouffe to compute exact digits of Pi.
<b>dbcount:</b>	An example job that counts the pageview logs stored in a database.
<b>distbbp:</b>	A mapreduce program that uses a BBP-type formula to compute exact bits of Pi.
<b>grep:</b>	A mapreduce program that counts the matches of a regex in the input.
<b>join:</b>	A job that performs a join over sorted, equally partitioned datasets.
<b>multifilewc:</b>	A job that counts words from several files.
<b>pentomino:</b>	A mapreduce tile laying program to find solutions to pentomino problems.
<b>pi:</b>	A mapreduce program that estimates Pi using a quasi-Monte Carlo method.
<b>randomtextwriter:</b>	A mapreduce program that writes 10 GB of random textual data per node.
<b>randomwriter:</b>	A mapreduce program that writes 10 GB of random data per node.
<b>secondarysort:</b>	An example defining a secondary sort to the reduce phase.
<b>sort:</b>	A mapreduce program that sorts the data written by the random writer.
<b>sudoku:</b>	A sudoku solver.
<b>teragen:</b>	Generate data for the terasort.
<b>terasort:</b>	Run the terasort.
<b>teravalidate:</b>	Checking results of terasort.
<b>wordcount:</b>	A mapreduce program that counts the words in the input files.
<b>wordmean:</b>	A mapreduce program that counts the average length of the words in the input files.
<b>wordmedian:</b>	A mapreduce program that counts the median length of the words in the input files.
<b>wordstandarddeviation:</b>	A mapreduce program that counts the standard deviation of the length of the words in the input files.

# Stop Your VM Instance

**DON'T FORGET TO  
STOP YOUR VM  
INSTANCE!**



```
gcloud compute instances stop big-data
```

