

### **Prerequisites:**

- Setup Google Cloud SDK
- Start VM instance
- Pull docker container marcelmittelstaedt/hive base:latest
- Start docker container: docker run -dit --name hive\_base\_container -p 8088:8088 -p 9870:9870 -p 9864:9864 marcelmittelst aedt/hive base:latest
- Get into docker container
- Start Hadoop and Hive Shell:
  - -start-all.sh
  - hive



#### Exercise 1-4:

1. Download and unzip https://datasets.imdbws.com/name.basics.tsv.gz

```
wget https://datasets.imdbws.com/name.basics.tsv.gz
gunzip name.basics.tsv.gz
```

2. Create HDFS directory /user/hadoop/imdb/name\_basics/ for file name.basics.tsv

```
hadoop fs -mkdir /user/hadoop/imdb/name_basics
```

3. Put TSV file to HDFS:

hadoop fs -put name.basics.tsv /user/hadoop/imdb/name\_basics/name.basics.tsv



#### Exercise 1-4:

4. Create Hive Table name\_basics:



#### **Exercise 5:**

a) How many movies and how many TV series are within the IMDB dataset?

```
hive > SELECT m.title_type, count(*)
    FROM title_basics m GROUP BY m.title_type;

tvMovie 148517
movie 693649
tvEpisode 8543922
tvSeries 270996
[...]

Time taken: 32.908 seconds, Fetched: 11 row(s)
```

b) Who is the youngest actor/writer/... within the dataset?


```
hive > SELECT * FROM name_basics n
WHERE n.birth_year = ( SELECT MAX(birth_year) FROM name_basics);
```



#### **Exercise 5:**

b) Who is the youngest actor/writer/... within the dataset?

```
hive >
          SELECT * FROM name basics n
          WHERE n.birth year = ( SELECT MAX (birth year)
                                       FROM name basics);
                 And it's Ronnie Lordi, a comedian, who is way older, so this one is
                               actually shitty data in IMDB:D
Time taken: 65.166 seconds, Fetched: 1 row(s)
```

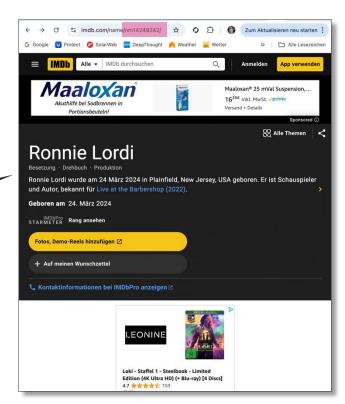



#### **Exercise 5:**

- c) Create a list (m.tconst, m.original\_title, m.start\_year, r.average\_rating, r.num\_votes) of movies which are:
  - equal or newer than year 2010
  - have an average rating equal or better than 8,1
  - have been voted more than 100.000 times

#### **Exercise 5:**

d) How many movies are in list of c)?

```
hive > SELECT count(*)
    FROM title_basics m JOIN title_ratings r on (m.tconst = r.tconst)
    WHERE r.average_rating >= 8.1 and m.start_year >= 2010 and m.title_type = 'movie'
    and r.num_votes > 100000;
67
```



#### **Exercise 5:**

e) We want to know which years have been great for cinema.

Create a list with one row per year and a related count of movies which:

- have an average rating better than 8
- have been voted more than 100.000 times ordered descending by count of movies.

```
hive > SELECT m.start_year, count(*)
    FROM title_basics m JOIN title_ratings r on (m.tconst = r.tconst)
    WHERE r.average_rating > 8 AND m.title_type = 'movie'
    AND r.num_votes > 100000
    GROUP BY m.start_year
    ORDER BY count(*) DESC;

1995 8
2019 7
2009 6
2003 6
2018 6
[...]
```

#### **Exercise 5:**

So 1995 seems to be a really good year for cinema, 8 really good movies have been releases, but which

are they?

```
hive > SELECT
            m.tconst, m.original title, m.start year, r.average rating,
            r.num votes
       FROM title basics m JOIN title ratings r ON (m.tconst = r.tconst)
       WHERE
            r.average rating > 8 AND m.title type = 'movie'
            AND r.num votes > 100000 AND m.start year = 1995
       ORDER BY r.average rating DESC;
[...]
```

