



Big Data com Hive e Impala

Case

Case


```
mysql> use retail_db;
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Database changed
mysql> show tables;
+-----+
| Tables_in_retail_db |
+-----+
| categories          |
| customers           |
| departments         |
| order_items         |
| orders              |
| products            |
+-----+
6 rows in set (0.00 sec)
```

- ◇ `mysql -u root -pcloudera`
- ◇ `use retail_db;`
- ◇ `show tables;`



Modelo

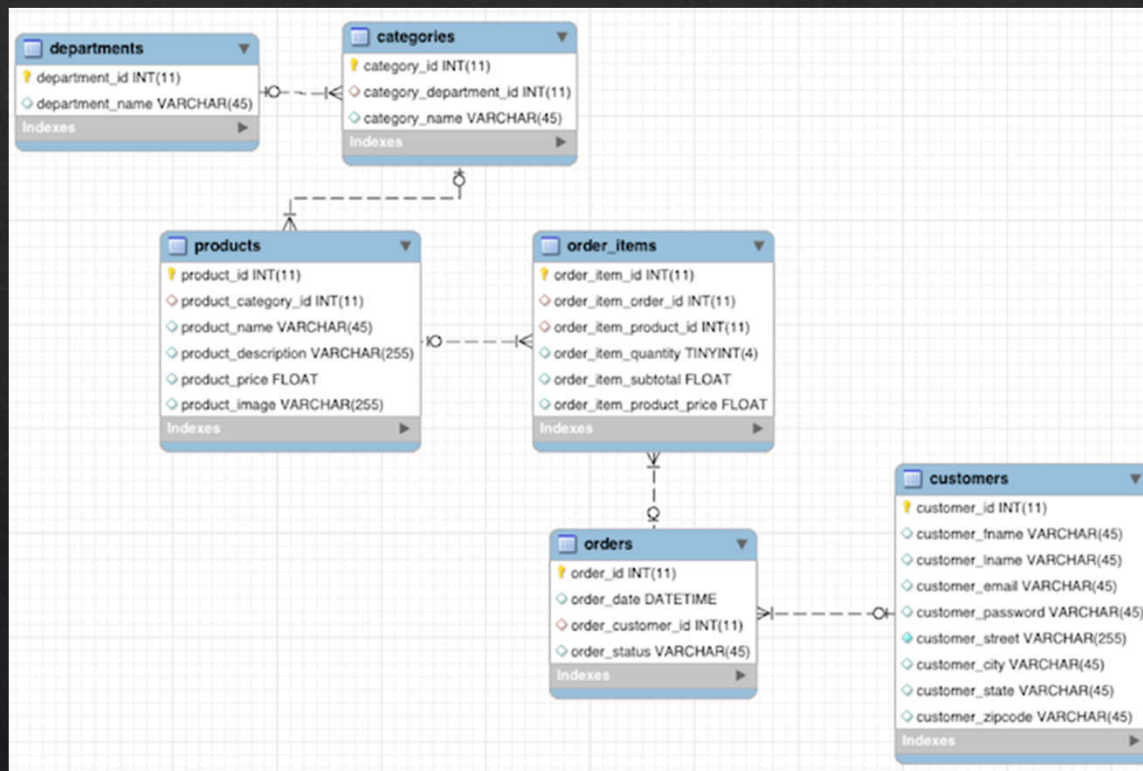

SQOOP

