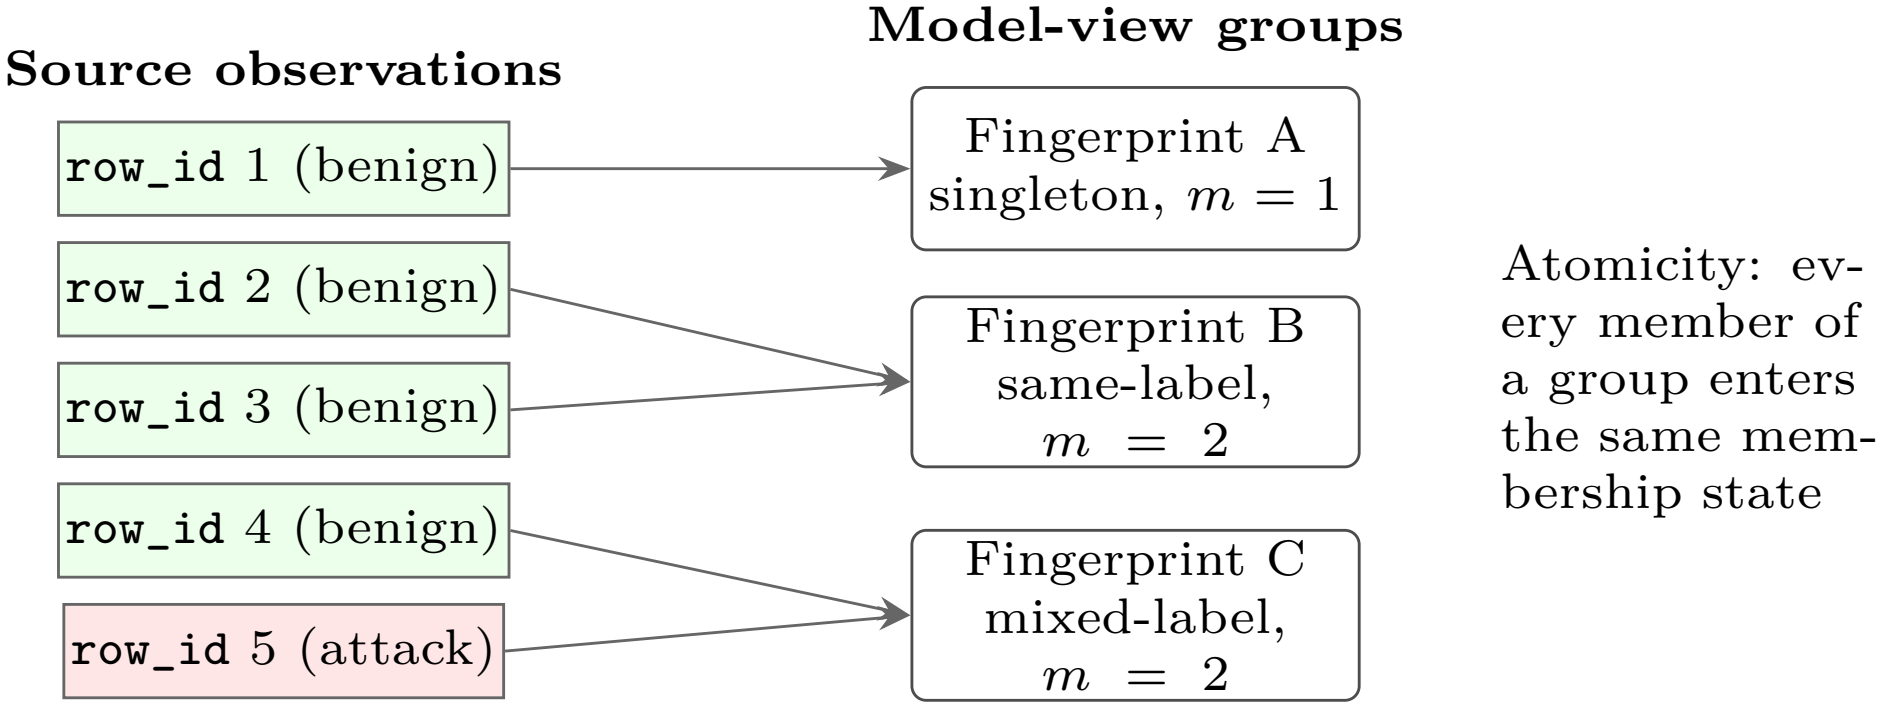

Source observations
Model-view groups
row_id 1 (benign)
row_id 2 (benign)
row_id 3 (benign)
row_id 4 (benign)
row_id 5 (attack)
Fingerprint A
singleton, m = 1
Fingerprint B
same-label,
m = 2
Fingerprint C
mixed-label,
m = 2
Atomicity: every member of a group enters the same membership state