

Java connection with PostgreSQL

Consulting

```
Choose a option:  
1 - Add new product  
2 - consult data:  
3 - Delete Product:  
0 - Quit:  
2
```

2

```
2  
Checking product list...  
OK  
1  
2  
3  
4  
888  
Choose a option:  
1 - Add new product  
2 - consult data:  
3 - Delete Product:  
0 - Quit:
```

	id_produto [PK] numeric (4)	nome character varying (30)	peso numeric (3,2)
1	1	Batata Potato	0.40
2	2	Cebola Onion	0.20
3	3	Alface Lettuce	0.25
4	4	Goiaba Guava	0.30
5	888	[null]	[null]

Java connection with PostgreSQL

Adding

```
Choose a option:
1 - Add new product
2 - consult data:
3 - Delete Product:
0 - Quit:
1
Adding product... Enter the ID
OK
6
```

1


```
Choose a option:
1 - Add new product
2 - consult data:
3 - Delete Product:
0 - Quit:
1
Adding product... Enter the ID
OK
6
```

	id_produto [PK] numeric (4)	nome character varying (30)	peso numeric (3,2)
1	1	Batata Potato	0.40
2	3	Alface Lettuce	0.25
3	4	Goiaba Guava	0.30
4	6	[null]	[null]
5	888	[null]	[null]

Java connection with PostgreSQL

Deleting

```
Choose a option:
1 - Add new product
2 - consult data:
3 - Delete Product:
0 - Quit:
3
Deleting products...
Select the ID product
OK
888
OK
```

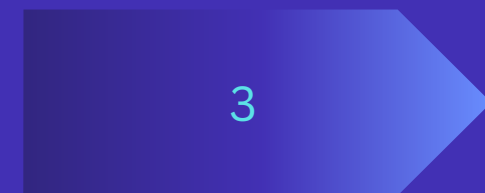

	id_produto [PK] numeric (4) ✎	nome character varying (30) ✎	peso numeric (3,2) ✎
1	1	Batata Potato	0.40
2	3	Alface Lettuce	0.25
3	4	Goiaba Guava	0.30
4	6	[null]	[null]